SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM System x3550 (Intel Xeon X5355)

SPECfp®2006 = 19.7

SPECfp_base2006 = 16.9

CPU2006 license: 11
Test sponsor: IBM Corporation
Tested by: IBM Corporation

Test date: Sep-2007
Hardware Availability: Apr-2007
Software Availability: Nov-2007

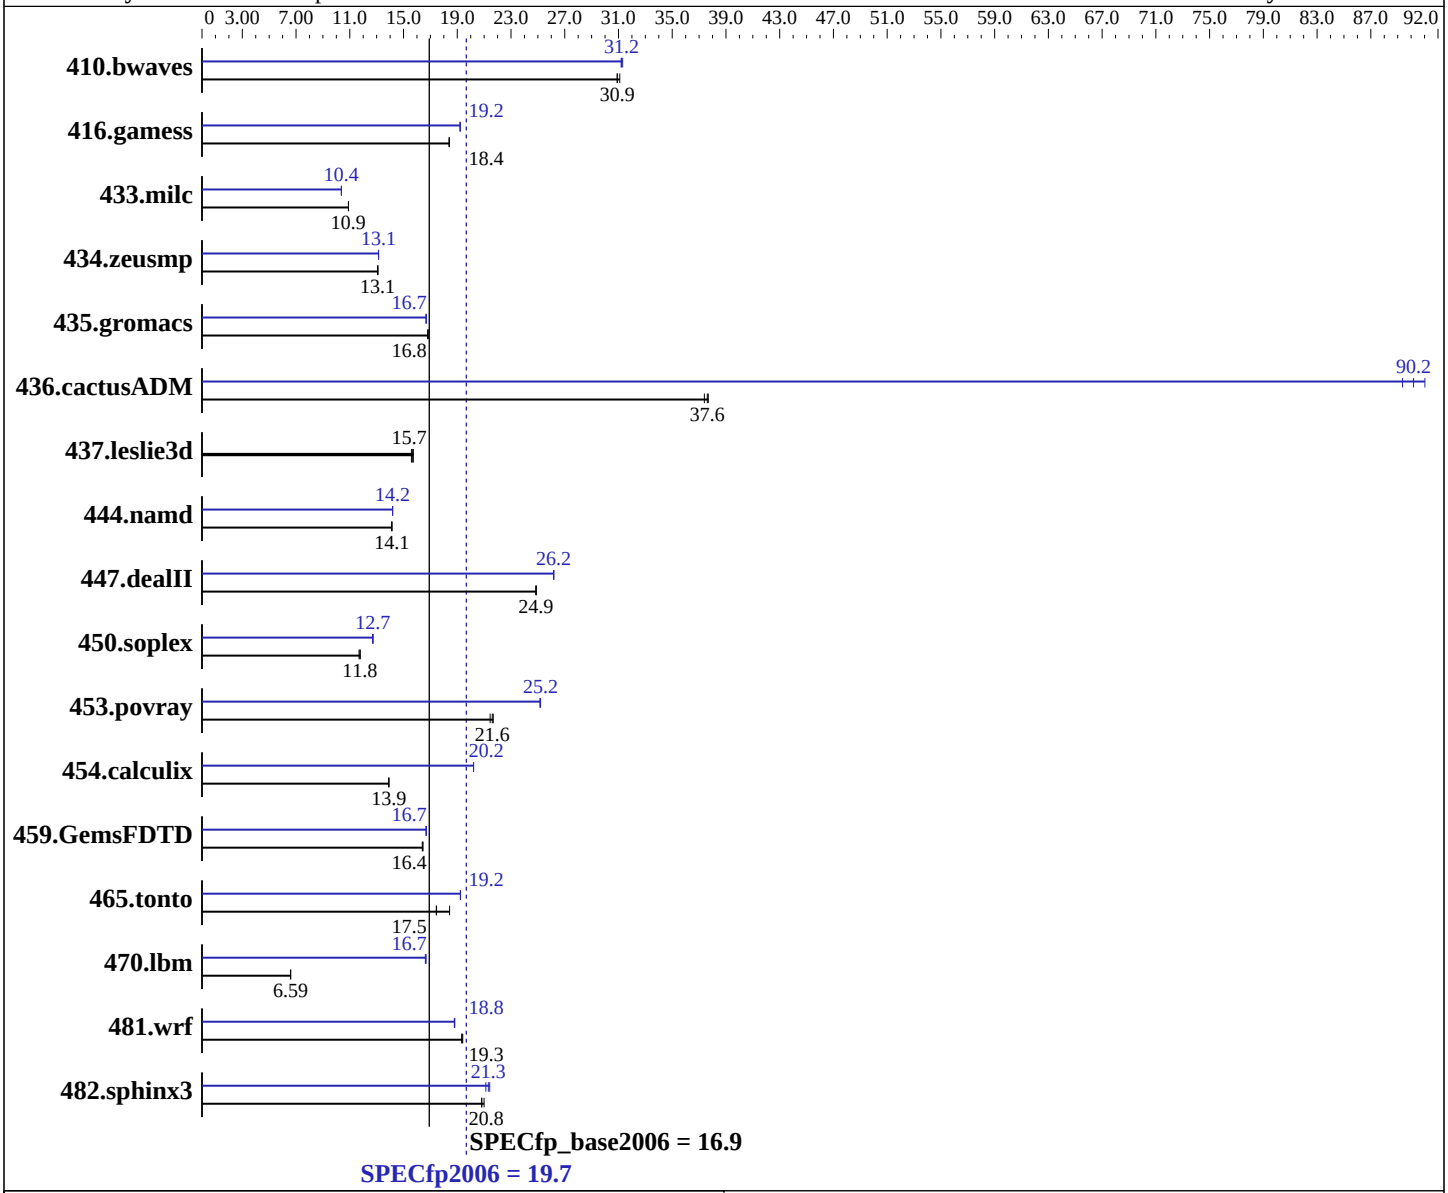

Hardware

CPU Name:	Intel Xeon X5355
CPU Characteristics:	1333MHz system bus
CPU MHz:	2667
FPU:	Integrated
CPU(s) enabled:	8 cores, 2 chips, 4 cores/chip
CPU(s) orderable:	1,2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	8 MB I+D on chip per chip, 4 MB shared / 2 cores

Continued on next page

Software

Operating System:	SLES 10 (x86_64), 2.6.16.21-0.8-smp
Compiler:	Intel C++ and Fortran Compiler for Linux version 10.1 Build 20070824
Auto Parallel:	Yes
File System:	ReiserFS
System State:	Multi-user, run level 3
Base Pointers:	64-bit
Peak Pointers:	32/64-bit

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM System x3550 (Intel Xeon X5355)

SPECfp2006 = 19.7

SPECfp_base2006 = 16.9

CPU2006 license: 11
Test sponsor: IBM Corporation
Tested by: IBM Corporation

Test date: Sep-2007
Hardware Availability: Apr-2007
Software Availability: Nov-2007

L3 Cache: None
Other Cache: None
Memory: 16 GB (8 x 2GB DRR2-5300F ECC)
Disk Subsystem: 1 x 36 GB SAS, 15000 RPM
Other Hardware: None

Other Software: None

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	440	30.9	**440**	**30.9**	437	31.1	434	31.3	**435**	**31.2**	436	31.2
416.gamess	**1063**	**18.4**	1063	18.4	1065	18.4	1019	19.2	1019	19.2	**1019**	**19.2**
433.milc	842	10.9	**842**	**10.9**	842	10.9	884	10.4	885	10.4	**885**	**10.4**
434.zeusmp	**696**	**13.1**	695	13.1	696	13.1	693	13.1	**692**	**13.1**	692	13.1
435.gromacs	425	16.8	**424**	**16.8**	424	16.8	428	16.7	428	16.7	**428**	**16.7**
436.cactusADM	320	37.4	317	37.7	**318**	**37.6**	134	89.4	131	91.0	**133**	**90.2**
437.leslie3d	598	15.7	**600**	**15.7**	603	15.6	598	15.7	**600**	**15.7**	603	15.6
444.namd	568	14.1	**568**	**14.1**	567	14.1	565	14.2	565	14.2	**565**	**14.2**
447.dealII	460	24.9	**460**	**24.9**	460	24.9	**437**	**26.2**	437	26.2	437	26.2
450.soplex	708	11.8	713	11.7	**709**	**11.8**	657	12.7	655	12.7	**655**	**12.7**
453.povray	248	21.4	245	21.7	**246**	**21.6**	211	25.2	**211**	**25.2**	212	25.1
454.calculix	593	13.9	**593**	**13.9**	593	13.9	408	20.2	**408**	**20.2**	408	20.2
459.GemsFDTD	645	16.4	**646**	**16.4**	647	16.4	635	16.7	**636**	**16.7**	636	16.7
465.tonto	534	18.4	**564**	**17.5**	564	17.4	511	19.2	512	19.2	**512**	**19.2**
470.lbm	2080	6.61	2087	6.58	**2084**	**6.59**	827	16.6	**825**	**16.7**	824	16.7
481.wrf	576	19.4	**577**	**19.3**	578	19.3	595	18.8	**594**	**18.8**	594	18.8
482.sphinx3	928	21.0	**936**	**20.8**	936	20.8	**914**	**21.3**	910	21.4	923	21.1

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

General Notes

```
OMP_NUM_THREADS set to number of cores
KMP_AFFINITY set to physical,0
KMP_STACKSIZE set to 200M
```

Base Compiler Invocation

C benchmarks:
`icc`

C++ benchmarks:
`icpc`

Continued on next page

Base Compiler Invocation (Continued)

Fortran benchmarks:
ifort

Benchmarks using both Fortran and C:
icc ifort

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
-fast -parallel

C++ benchmarks:
-fast -parallel

Fortran benchmarks:
-fast -parallel

Benchmarks using both Fortran and C:
-fast -parallel

Peak Compiler Invocation

C benchmarks (except as noted below):
/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070824/Linux32/bin/icc
-L/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070824/Linux32/lib

Continued on next page

Peak Compiler Invocation (Continued)

C benchmarks (except as noted below) (continued):
`-I/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070824/Linux32/include`

433.milc: `icc`

C++ benchmarks (except as noted below):
`icpc`

450.soplex: `/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070824/Linux32/bin/icpc`
`-L/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070824/Linux32/lib`
`-I/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070824/Linux32/include`

Fortran benchmarks:
`ifort`

Benchmarks using both Fortran and C:
`icc ifort`

Peak Portability Flags

410.bwaves: `-DSPEC_CPU_LP64`
416.gamess: `-DSPEC_CPU_LP64`
433.milc: `-DSPEC_CPU_LP64`
434.zeusmp: `-DSPEC_CPU_LP64`
435.gromacs: `-DSPEC_CPU_LP64 -nofor_main`
436.cactusADM: `-DSPEC_CPU_LP64 -nofor_main`
437.leslie3d: `-DSPEC_CPU_LP64`
444.namd: `-DSPEC_CPU_LP64`
447.dealII: `-DSPEC_CPU_LP64`
453.povray: `-DSPEC_CPU_LP64`
454.calculix: `-DSPEC_CPU_LP64 -nofor_main`
459.GemsFDTD: `-DSPEC_CPU_LP64`
465.tonto: `-DSPEC_CPU_LP64`
481.wrf: `-DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX`

Peak Optimization Flags

C benchmarks:

433.milc: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -fno-alias`
`-auto-ilp32`

470.lbm: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -unroll2`
`-scalar-rep- -prefetch -opt-malloc-options=3`

Continued on next page

Peak Optimization Flags (Continued)

482.sphinx3: `-fast -unroll2`

C++ benchmarks:

444.namd: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -fno-alias -auto-ilp32`

447.dealII: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -unroll2 -ansi-alias -scalar-rep-`

450.soplex: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -opt-malloc-options=3`

453.povray: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -unroll4 -ansi-alias`

Fortran benchmarks:

410.bwaves: `-fast -prefetch -parallel`

416.gamess: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -unroll2 -Ob0 -ansi-alias -scalar-rep-`

434.zeusmp: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast`

437.leslie3d: `basepeak = yes`

459.GemsFDTD: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -unroll2 -Ob0 -prefetch -parallel`

465.tonto: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -unroll4 -auto`

Benchmarks using both Fortran and C:

435.gromacs: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -prefetch -auto-ilp32`

436.cactusADM: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -unroll2 -prefetch -parallel -auto-ilp32`

454.calculix: `-fast -unroll-aggressive -auto-ilp32`

481.wrf: `-fast -parallel -prefetch -auto-ilp32`

The flags file that was used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/Intel-ic10.1-FP-intel64-linux-flags.20090714.21.html`

You can also download the XML flags source by saving the following link:
`http://www.spec.org/cpu2006/flags/Intel-ic10.1-FP-intel64-linux-flags.20090714.21.xml`

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Jul 22 14:57:33 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 16 October 2007.