SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge 6950 (AMD Opteron 8220, 2.80 GHz)

SPECint®_rate2006 = 102

SPECint_rate_base2006 = 93.8

CPU2006 license: 55
Test sponsor: Dell Inc.
Tested by: Dell Inc.

Test date: Sep-2007
Hardware Availability: Dec-2006
Software Availability: Oct-2007

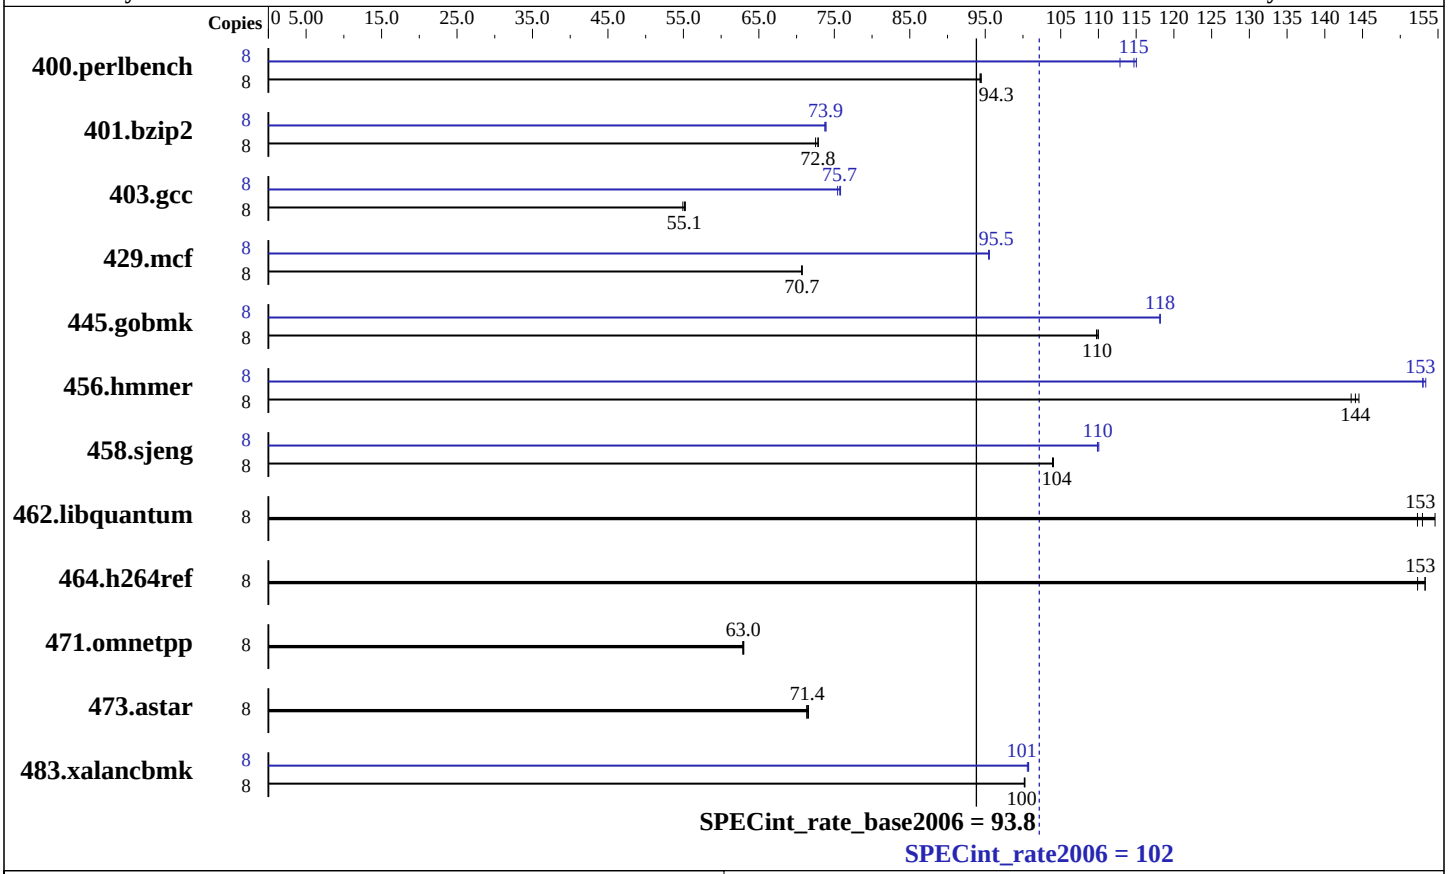

Hardware

CPU Name:	AMD Opteron 8220
CPU Characteristics:	
CPU MHz:	2800
FPU:	Integrated
CPU(s) enabled:	8 cores, 4 chips, 2 cores/chip
CPU(s) orderable:	2,4 chips
Primary Cache:	64 KB I + 64 KB D on chip per core
Secondary Cache:	1 MB I+D on chip per core
L3 Cache:	None
Other Cache:	None
Memory:	32 GB (16x2GB, DDR2-667 CL5 ECC Dual Rank)
Disk Subsystem:	1 x 250 GB SATA 7200 RPM
Other Hardware:	None

Software

Operating System:	64-Bit SUSE LINUX Enterprise Server 10
Compiler:	The Portland Group (PGI) PGI pgcc 7.1-0 C Compiler PGI pgCC 7.1-0 C++ Compiler
Auto Parallel:	No
File System:	ReiserFS
System State:	Multi-user, run level 3
Base Pointers:	32/64-bit
Peak Pointers:	32/64-bit
Other Software:	SmartHeap 8.0 32-bit Library for Linux

SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge 6950 (AMD Opteron 8220, 2.80 GHz)

SPECint_rate2006 = 102

SPECint_rate_base2006 = 93.8

CPU2006 license: 55
Test sponsor: Dell Inc.
Tested by: Dell Inc.

Test date: Sep-2007
Hardware Availability: Dec-2006
Software Availability: Oct-2007

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	8	**828**	**94.3**	829	94.3	827	94.5	8	693	113	**681**	**115**	679	115
401.bzip2	8	1059	72.9	**1060**	**72.8**	1065	72.5	8	1047	73.7	**1045**	**73.9**	1045	73.9
403.gcc	8	1165	55.3	**1168**	**55.1**	1172	54.9	8	849	75.8	854	75.4	**850**	**75.7**
429.mcf	8	**1031**	**70.7**	1031	70.7	1033	70.7	8	764	95.5	**764**	**95.5**	764	95.5
445.gobmk	8	763	110	765	110	**764**	**110**	8	**710**	**118**	710	118	710	118
456.hmmer	8	**518**	**144**	516	145	520	143	8	487	153	488	153	**488**	**153**
458.sjeng	8	**931**	**104**	930	104	932	104	8	880	110	**881**	**110**	881	110
462.libquantum	8	1089	152	**1084**	**153**	1072	155	8	1089	152	**1084**	**153**	1072	155
464.h264ref	8	1162	152	1155	153	**1155**	**153**	8	1162	152	1155	153	**1155**	**153**
471.omnetpp	8	794	63.0	**794**	**63.0**	795	62.9	8	794	63.0	**794**	**63.0**	795	62.9
473.astar	8	785	71.6	**786**	**71.4**	787	71.3	8	785	71.6	**786**	**71.4**	787	71.3
483.xalancbmk	8	551	100	551	100	**551**	**100**	8	548	101	**548**	**101**	549	101

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

General Notes

```
'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2457600' was used to set environment locked pages in memory quantity
'numactl' was used to bind one copy per core, and memory to a local NUMA node
Set vm/nr_hugepages=1200 in /etc/sysctl.conf
mount -t hugetlbfs nodev /mnt/hugepages
Environment variable PGI_HUGE_PAGES set to 150
```

Base Compiler Invocation

C benchmarks:
pgcc

C++ benchmarks:
pgcpp

Base Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64

Continued on next page

Base Portability Flags (Continued)

458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
-fast -Mipa=fast -Mipa=inline -Mipa=noarg -Mfprelaxed
-Msmartalloc=huge:64 -tp k8-64 -Bstatic_pgi

C++ benchmarks:
-fastsse -Mipa=fast -Mipa=inline -Mfprelaxed -Msmartalloc --zc_eh
-tp k8-32 -Bstatic_pgi -lsmartheap

Base Other Flags

C benchmarks:
-w

C++ benchmarks:
-w -L/proj/qa/smartheap/SmartHeap_8/lib

Peak Compiler Invocation

C benchmarks:
pgcc

C++ benchmarks:
pgcpp

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: `-Mpfi`(pass 1) `-Mpfo`(pass 2) `-Mipa=inline`(pass 2) `-fast -O4 -Mfprelaxed -Msmartalloc=huge:8 -Mnounroll -tp k8-64 -Bstatic_pgi`

401.bzip2: `-Mpfi`(pass 1) `-Mpfo`(pass 2) `-fast -O4 -Msmartalloc=huge:64 -tp k8-64 -Bstatic_pgi`

403.gcc: `-fastsse -Mfprelaxed -Msmartalloc=huge:32 -Mipa=fast -Mipa=inline -tp k8-32 -Bstatic_pgi`

429.mcf: `-fastsse -Mipa=fast -Mipa=inline -Msmartalloc=huge:16 -tp k8-32 -Bstatic_pgi`

445.gobmk: `-Mpfi`(pass 1) `-Mpfo`(pass 2) `-Mipa=fast`(pass 2) `-fast -O4 -Msmartalloc=huge:32 -Mfprelaxed -Mnovect -tp k8-64 -Bstatic_pgi`

456.hmmer: `-fast -Msmartalloc=huge:32 -Mfprelaxed -Msafeptr -Mipa=const -Mipa=ptr -Mipa=arg -tp k8-64 -Bstatic_pgi`

458.sjeng: `-Mpfi`(pass 1) `-Mipa=fast`(pass 2) `-Mipa=inline`(pass 2) `-Mipa=noarg`(pass 2) `-Mpfo`(pass 2) `-fast -Msmartalloc=huge:32 -Mfprelaxed -tp k8-64 -Bstatic_pgi`

462.libquantum: `basepeak = yes`

464.h264ref: `basepeak = yes`

C++ benchmarks:

471.omnetpp: `basepeak = yes`

473.astar: `basepeak = yes`

483.xalancbmk: `-fastsse -O4 -Mipa=fast -Mipa=inline -Mfprelaxed -Msmartalloc --zc_eh -tp k8-32 -Bstatic_pgi -lsmartheap`

Peak Other Flags

C benchmarks:
`-w`

C++ benchmarks:
`-w -L/proj/qa/smartheap/SmartHeap_8/lib`

The flags file that was used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/pgi710_flags.html

You can also download the XML flags source by saving the following link:
http://www.spec.org/cpu2006/flags/pgi710_flags.xml

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Jul 22 14:49:22 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 16 October 2007.