



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint®_rate2006 = 89.6

PowerEdge 1950 (Intel Xeon E5335, 2.00 GHz)

SPECint_rate_base2006 = 79.4

CPU2006 license: 55


Test date: Sep-2007

Test sponsor: Dell Inc.

Hardware Availability: Dec-2006

Tested by: Dell Inc.

Software Availability: Nov-2007

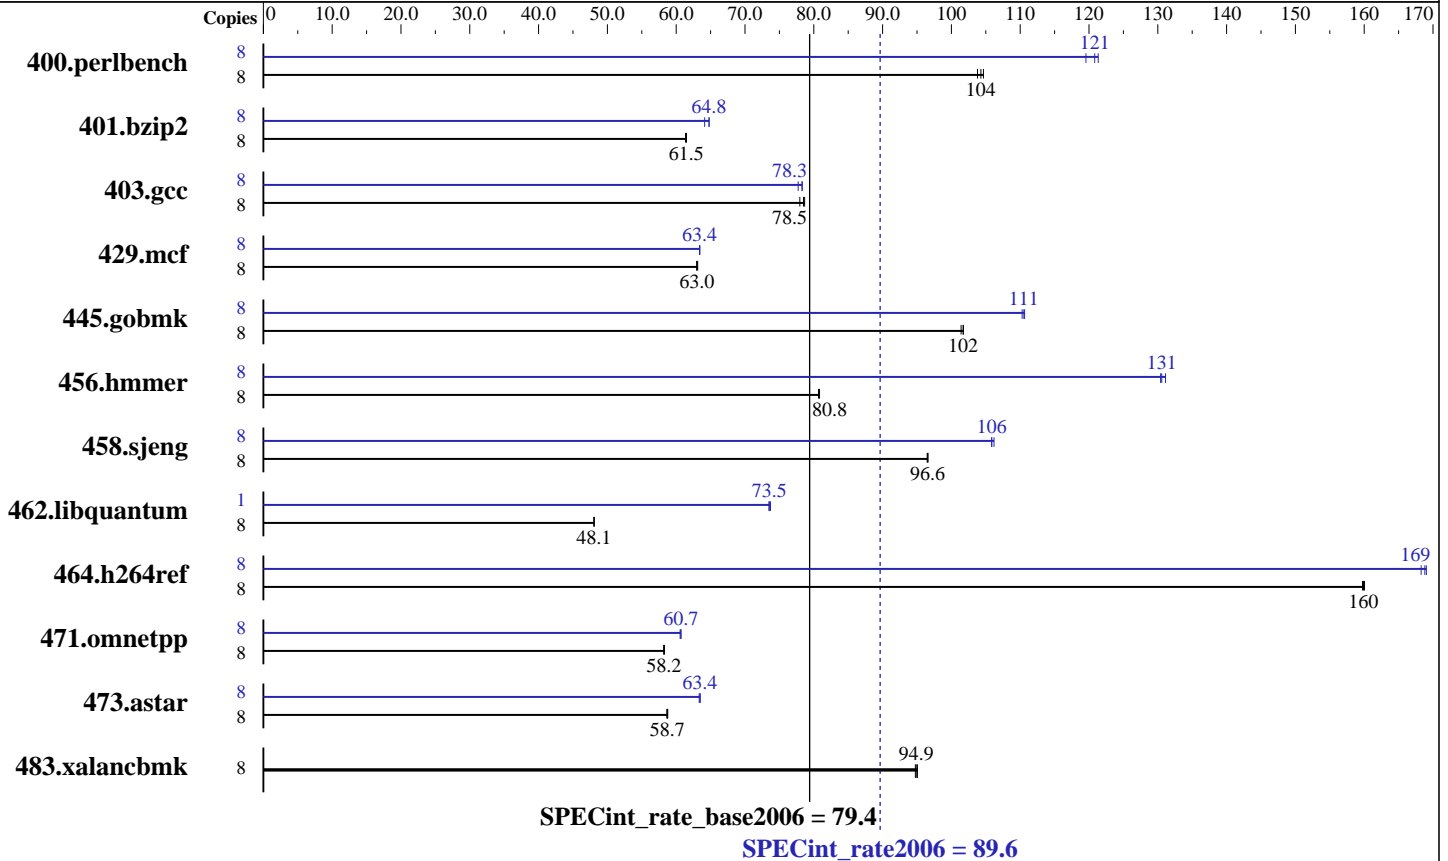

Hardware

CPU Name: Intel Xeon E5335
 CPU Characteristics: 1333 MHz system bus
 CPU MHz: 2000
 FPU: Integrated
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 8 MB I+D on chip per chip, 4 MB shared / 2 cores
 L3 Cache: None
 Other Cache: None
 Memory: 16 GB (8x2 GB 667 MHz ECC CL5 FB-DIMM)
 Disk Subsystem: 1 x 73 GB SAS 15k RPM
 Other Hardware: None

Software

Operating System: 64-Bit SUSE LINUX Enterprise Server 10 SP1
 Compiler: Intel C++ Compiler for Linux32 and Linux64 version 10.1 Build 20070725
 Auto Parallel: Yes
 File System: ReiserFS
 System State: Multi-user, run level 3
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: SmartHeap library V8.1



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint_rate2006 = 89.6

PowerEdge 1950 (Intel Xeon E5335, 2.00 GHz)

SPECint_rate_base2006 = 79.4

CPU2006 license: 55
Test sponsor: Dell Inc.
Tested by: Dell Inc.

Test date: Sep-2007
Hardware Availability: Dec-2006
Software Availability: Nov-2007

Results Table

Benchmark	Base						Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	8	749	104	753	104	747	105	8	654	120	644	121	647	121
401.bzip2	8	1258	61.4	1256	61.5	1256	61.5	8	1204	64.1	1192	64.8	1192	64.8
403.gcc	8	819	78.7	820	78.5	826	78.0	8	823	78.3	829	77.7	822	78.3
429.mcf	8	1156	63.1	1159	63.0	1158	63.0	8	1150	63.4	1150	63.4	1151	63.4
445.gobmk	8	825	102	827	101	825	102	8	758	111	761	110	759	111
456.hammer	8	925	80.7	923	80.8	924	80.8	8	569	131	572	130	572	131
458.sjeng	8	1002	96.6	1003	96.5	1002	96.6	8	914	106	914	106	912	106
462.libquantum	8	3449	48.1	3449	48.1	3449	48.1	1	281	73.7	282	73.5	282	73.5
464.h264ref	8	1108	160	1106	160	1107	160	8	1049	169	1052	168	1047	169
471.omnetpp	8	859	58.2	859	58.2	858	58.3	8	824	60.7	825	60.6	824	60.7
473.astar	8	956	58.7	958	58.6	956	58.8	8	885	63.5	885	63.4	887	63.3
483.xalancbmk	8	581	95.1	582	94.9	583	94.8	8	581	95.1	582	94.9	583	94.8

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Invocation Notes

OMP_NUM_THREADS set to number of cores
KMP_STACK_SIZE set to 64M
KMP_AFFINITY set to physical,0

Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run
'/usr/bin/taskset' used to bind processes to CPUs

Platform Notes

BIOS Settings:
Adjacent Cache Line Prefetch = Disabled (default Enabled)
Hardware Prefetcher = Disabled (default Enabled)

Base Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint_rate2006 = 89.6

PowerEdge 1950 (Intel Xeon E5335, 2.00 GHz)

SPECint_rate_base2006 = 79.4

CPU2006 license: 55

Test date: Sep-2007

Test sponsor: Dell Inc.

Hardware Availability: Dec-2006

Tested by: Dell Inc.

Software Availability: Nov-2007

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:

-fast -inline-calloc -opt-malloc-options=3

C++ benchmarks:

-xT -ipo -O3 -no-prec-div -Wl,-z,muldefs
-L/home/cmplr/usr3/alrahate/cpu2006.1.0/lib -lsmartheap

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):

icc

401.bzip2: /home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux64/bin/icc
-L/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux64/lib
-I/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux64/include

456.hmmer: /home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux64/bin/icc
-L/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux64/lib
-I/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux64/include

C++ benchmarks:

icpc

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
401.bzip2: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LINUX

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint_rate2006 = 89.6

PowerEdge 1950 (Intel Xeon E5335, 2.00 GHz)

SPECint_rate_base2006 = 79.4

CPU2006 license: 55

Test date: Sep-2007

Test sponsor: Dell Inc.

Hardware Availability: Dec-2006

Tested by: Dell Inc.

Software Availability: Nov-2007

Peak Portability Flags (Continued)

483.xalanbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -prof-gen(pass 1) -prof-use(pass 2) -fast -ansi-alias
-prefetch

401.bzip2: -prof-gen(pass 1) -prof-use(pass 2) -fast -prefetch

403.gcc: -fast -inline-calloc -opt-malloc-options=3

429.mcf: -fast -prefetch

445.gobmk: -prof-gen(pass 1) -prof-use(pass 2) -xT -O2 -ipo
-no-prec-div -ansi-alias

456.hmmer: -fast -unroll2 -ansi-alias -opt-multi-version-aggressive

458.sjeng: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll4

462.libquantum: -fast -unroll4 -Ob0 -prefetch
-opt-streaming-stores always -vec-guard-write
-opt-malloc-options=3 -parallel -par-runtime-control

464.h264ref: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2
-ansi-alias

C++ benchmarks:

471.omnetpp: -prof-gen(pass 1) -prof-use(pass 2) -xT -O3 -ipo
-no-prec-div -ansi-alias -opt-ra-region-strategy=block
-Wl,-z,muldefs
-L/home/cmplr/usr3/alrahate/cpu2006.1.0/lib -lsmartheap

473.astar: -prof-gen(pass 1) -prof-use(pass 2) -xT -O3 -ipo
-no-prec-div -ansi-alias -opt-ra-region-strategy=routine
-Wl,-z,muldefs
-L/home/cmplr/usr3/alrahate/cpu2006.1.0/lib -lsmartheap

483.xalanbmk: basepeak = yes



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint_rate2006 = 89.6

PowerEdge 1950 (Intel Xeon E5335, 2.00 GHz)

SPECint_rate_base2006 = 79.4

CPU2006 license: 55

Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date: Sep-2007

Hardware Availability: Dec-2006

Software Availability: Nov-2007

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic10-ia32-intel64-linux-flags.20090714.22.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic10-ia32-intel64-linux-flags.20090714.22.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Jul 22 14:15:31 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 30 October 2007.