



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

PRIMERGY BX620 S4, Intel Xeon processor X5365,
3.0 GHz

SPECint_rate2006 = 115

SPECint_rate_base2006 = 96.3

CPU2006 license: 22


Test sponsor: Fujitsu Siemens Computers

Tested by: Fujitsu Siemens Computers

Test date: Oct-2007

Hardware Availability: Sep-2007

Software Availability: Nov-2007

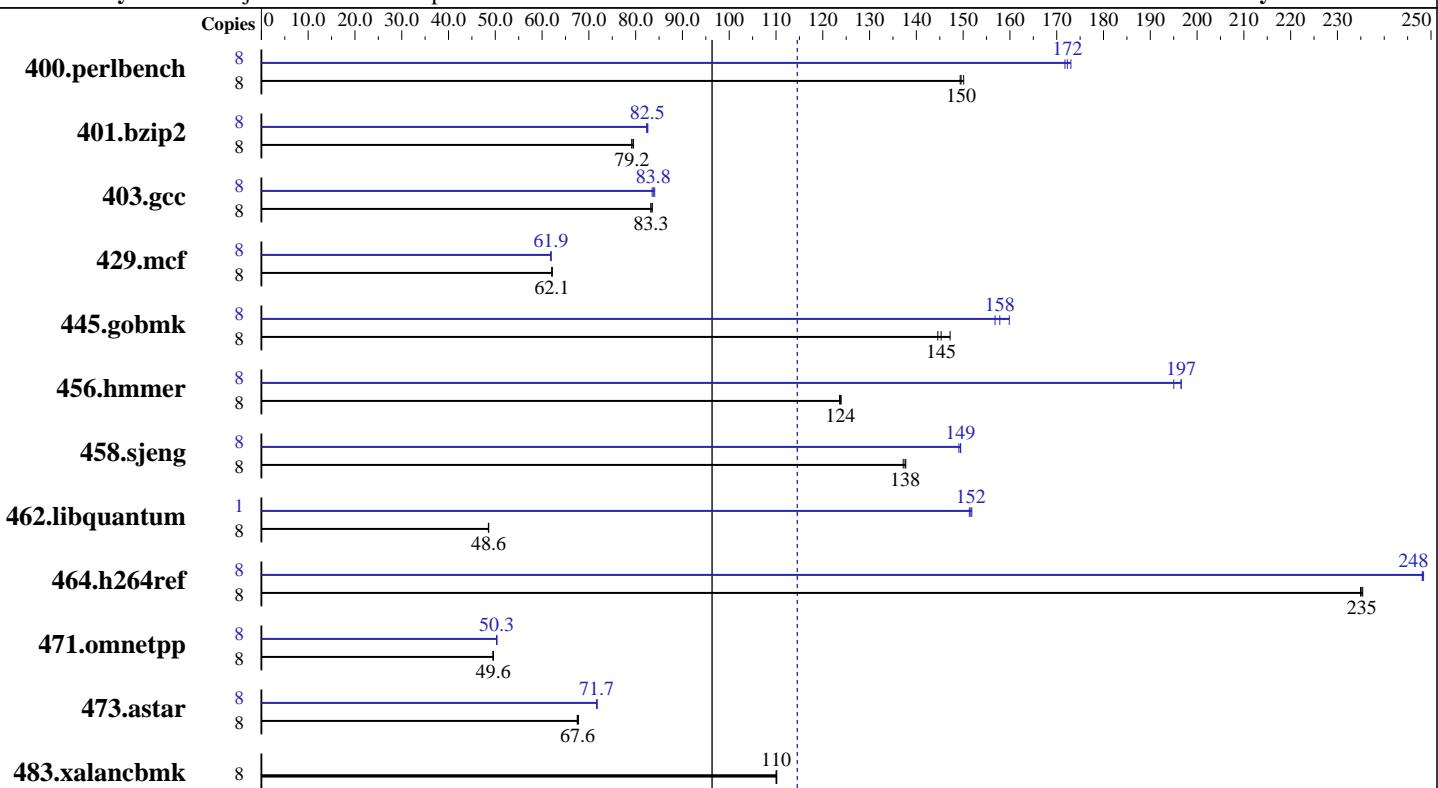

SPECint_rate_base2006 = 96.3

SPECint_rate2006 = 115

Hardware

CPU Name:	Intel Xeon X5365
CPU Characteristics:	1333 MHz system bus
CPU MHz:	3000
FPU:	Integrated
CPU(s) enabled:	8 cores, 2 chips, 4 cores/chip
CPU(s) orderable:	1,2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	8 MB I+D on chip per chip, 4 MB shared / 2 cores
L3 Cache:	None
Other Cache:	None
Memory:	16 GB (8x2 GB DDR2 PC2-5300F, 2 rank, CAS 5-5-5, with ECC)
Disk Subsystem:	Seagate ST973451SS (SAS, 73GB, 15000rpm)
Other Hardware:	None

Software

Operating System:	SUSE LINUX Enterprise Server 10 SP1 (x86_64), Kernel 2.6.16.46-0.12-smp
Compiler:	Intel C++ Compiler for Linux32 and Linux64 Version 10.1 - Build 20070725
Auto Parallel:	Yes
File System:	ext2
System State:	Multiuser, Runlevel 3
Base Pointers:	32-bit
Peak Pointers:	32/64-bit
Other Software:	Smart Heap Library, Version 8.1 binutils-2.17.tar.gz, Version 2.17



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

PRIMERGY BX620 S4, Intel Xeon processor X5365,
3.0 GHz

SPECint_rate2006 = 115

SPECint_rate_base2006 = 96.3

CPU2006 license: 22

Test date: Oct-2007

Test sponsor: Fujitsu Siemens Computers

Hardware Availability: Sep-2007

Tested by: Fujitsu Siemens Computers

Software Availability: Nov-2007

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	8	521	150	523	150	523	149	8	454	172	455	172	452	173
401.bzip2	8	974	79.2	970	79.5	975	79.2	8	938	82.3	936	82.5	935	82.6
403.gcc	8	771	83.6	773	83.3	773	83.3	8	766	84.1	771	83.5	769	83.8
429.mcf	8	1175	62.1	1175	62.1	1174	62.2	8	1179	61.9	1178	61.9	1180	61.9
445.gobmk	8	578	145	580	145	570	147	8	532	158	535	157	525	160
456.hammer	8	604	124	602	124	603	124	8	380	197	383	195	380	197
458.sjeng	8	704	138	706	137	703	138	8	649	149	648	149	648	149
462.libquantum	8	3411	48.6	3414	48.6	3417	48.5	1	137	152	137	151	136	152
464.h264ref	8	754	235	753	235	752	235	8	713	248	713	248	714	248
471.omnetpp	8	1008	49.6	1010	49.5	1009	49.6	8	994	50.3	993	50.3	995	50.3
473.astar	8	832	67.5	828	67.8	830	67.6	8	783	71.8	784	71.7	783	71.7
483.xalancbmk	8	501	110	502	110	502	110	8	501	110	502	110	502	110

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

General Notes

This result has been produced with binaries provided and compiled by Intel.

All binaries were built with 32-bit Intel compiler except:
401.bzip2 and 456.hammer in peak were built with 64-bit Intel
compiler by changing the path for include and library files.

BIOS configuration:

Adjacent Sector Prefetch = Disable

For information about Fujitsu Siemens Computers please see:
<http://www.fujitsu-siemens.com>

Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

PRIMERGY BX620 S4, Intel Xeon processor X5365,
3.0 GHz

SPECint_rate2006 = 115

SPECint_rate_base2006 = 96.3

CPU2006 license: 22

Test sponsor: Fujitsu Siemens Computers

Tested by: Fujitsu Siemens Computers

Test date: Oct-2007

Hardware Availability: Sep-2007

Software Availability: Nov-2007

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:

-fast -inline-calloc -opt-malloc-options=3

C++ benchmarks:

-xT -ipo -O3 -no-prec-div -Wl,-z,muldefs
-L/home/cmpllr/usr3/alrahate/cpu2006.1.0/lib -lsmartheap

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):

icc

401.bzip2: /home/cmpllr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux64/bin/icc
-L/home/cmpllr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux64/lib
-I/home/cmpllr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux64/include

456.hmmr: /home/cmpllr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux64/bin/icc
-L/home/cmpllr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux64/lib
-I/home/cmpllr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux64/include

C++ benchmarks:

icpc

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
401.bzip2: -DSPEC_CPU_LP64
456.hmmr: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LINUX

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

PRIMERGY BX620 S4, Intel Xeon processor X5365,
3.0 GHz

SPECint_rate2006 = 115

SPECint_rate_base2006 = 96.3

CPU2006 license: 22

Test date: Oct-2007

Test sponsor: Fujitsu Siemens Computers

Hardware Availability: Sep-2007

Tested by: Fujitsu Siemens Computers

Software Availability: Nov-2007

Peak Portability Flags (Continued)

483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

```
400.perlbench: -prof-gen(pass 1) -prof-use(pass 2) -fast -ansi-alias  
                  -prefetch  
  
401.bzip2: -prof-gen(pass 1) -prof-use(pass 2) -fast -prefetch  
  
403.gcc: -fast -inline-calloc -opt-malloc-options=3  
  
429.mcf: -fast -prefetch  
  
445.gobmk: -prof-gen(pass 1) -prof-use(pass 2) -xT -O2 -ipo  
                  -no-prec-div -ansi-alias  
  
456.hmmer: -fast -unroll12 -ansi-alias -opt-multi-version-aggressive  
  
458.sjeng: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll4  
  
462.libquantum: -fast -unroll14 -Ob0 -prefetch  
                  -opt-streaming-stores always -vec-guard-write  
                  -opt-malloc-options=3 -parallel -par-runtime-control  
  
464.h264ref: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll12  
                  -ansi-alias
```

C++ benchmarks:

```
471.omnetpp: -prof-gen(pass 1) -prof-use(pass 2) -xT -O3 -ipo  
                  -no-prec-div -ansi-alias -opt-ra-region-strategy=block  
                  -Wl,-z,muldefs  
                  -L/home/cmplr/usr3/alrahate/cpu2006.1.0/lib -lsmartheap  
  
473.astar: -prof-gen(pass 1) -prof-use(pass 2) -xT -O3 -ipo  
                  -no-prec-div -ansi-alias -opt-ra-region-strategy=routine  
                  -Wl,-z,muldefs  
                  -L/home/cmplr/usr3/alrahate/cpu2006.1.0/lib -lsmartheap
```

483.xalancbmk: basepeak = yes



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

PRIMERGY BX620 S4, Intel Xeon processor X5365,
3.0 GHz

SPECint_rate2006 = 115

SPECint_rate_base2006 = 96.3

CPU2006 license: 22

Test date: Oct-2007

Test sponsor: Fujitsu Siemens Computers

Hardware Availability: Sep-2007

Tested by: Fujitsu Siemens Computers

Software Availability: Nov-2007

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic10-ia32-intel64-linux-flags.20090713.02.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic10-ia32-intel64-linux-flags.20090713.02.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.

Report generated on Tue Jul 22 14:42:11 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 13 November 2007.