SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM System x3550 (Intel Xeon E5345)

SPECfp®2006 = 16.5

SPECfp_base2006 = 14.2

CPU2006 license: 11
Test sponsor: IBM Corporation
Tested by: IBM Corporation

Test date: Sep-2007
Hardware Availability: Feb-2007
Software Availability: Nov-2007

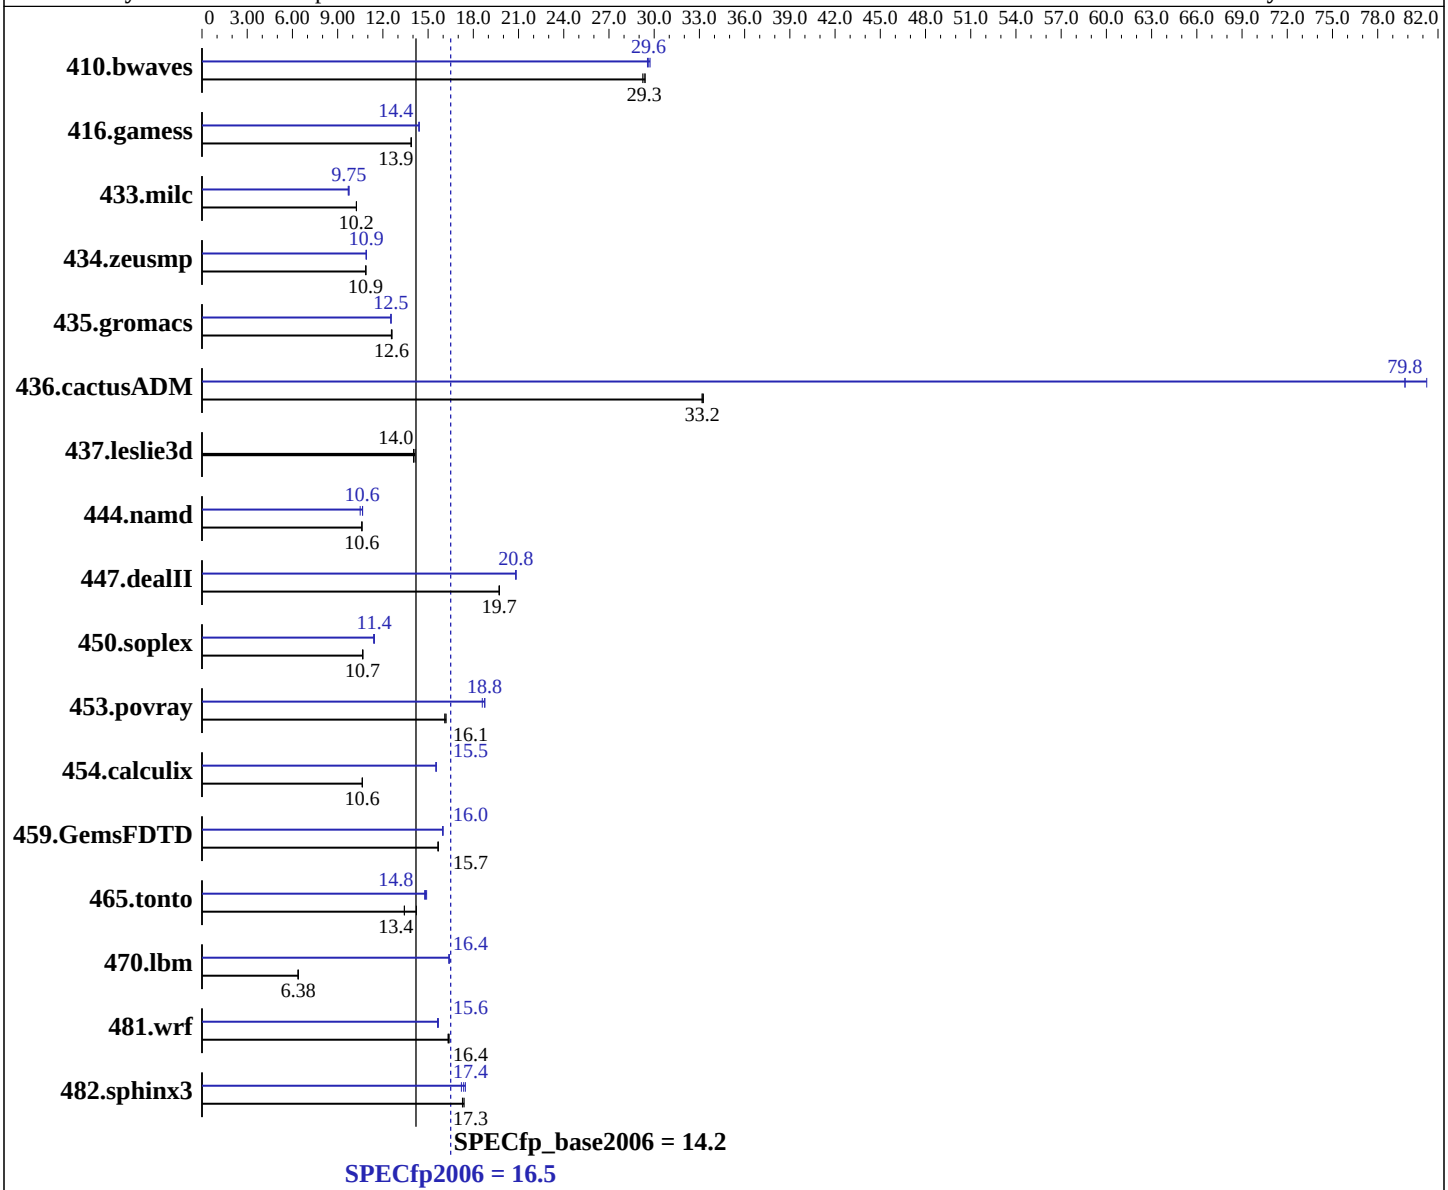

Hardware

CPU Name:	Intel Xeon E5345
CPU Characteristics:	1333MHz system bus
CPU MHz:	2333
FPU:	Integrated
CPU(s) enabled:	8 cores, 2 chips, 4 cores/chip
CPU(s) orderable:	1,2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	8 MB I+D on chip per chip, 4 MB shared / 2 cores

Continued on next page

Software

Operating System:	SLES 10 (x86_64), 2.6.16.21-0.8-smp
Compiler:	Intel C++ and Fortran Compiler for Linux version 10.1 Build 20070824
Auto Parallel:	Yes
File System:	ReiserFS
System State:	Multi-user, run level 3
Base Pointers:	64-bit
Peak Pointers:	32/64-bit

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM System x3550 (Intel Xeon E5345)

SPECfp2006 = 16.5

SPECfp_base2006 = 14.2

CPU2006 license: 11
Test sponsor: IBM Corporation
Tested by: IBM Corporation

Test date: Sep-2007
Hardware Availability: Feb-2007
Software Availability: Nov-2007

L3 Cache: None
Other Cache: None
Memory: 16 GB (8 x 2 GB DDR2-5300F ECC)
Disk Subsystem: 1 x 36 GB SAS, 15000 RPM
Other Hardware: None

Other Software: None

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	**463**	**29.3**	462	29.4	465	29.2	457	29.7	460	29.6	**459**	**29.6**
416.gamess	1412	13.9	**1410**	**13.9**	1410	13.9	1360	14.4	1359	14.4	**1360**	**14.4**
433.milc	896	10.2	896	10.2	**896**	**10.2**	**942**	**9.75**	942	9.75	946	9.70
434.zeusmp	**838**	**10.9**	837	10.9	838	10.9	835	10.9	**835**	**10.9**	836	10.9
435.gromacs	**567**	**12.6**	568	12.6	566	12.6	569	12.5	**569**	**12.5**	570	12.5
436.cactusADM	**360**	**33.2**	360	33.2	359	33.3	147	81.3	**150**	**79.8**	150	79.8
437.leslie3d	665	14.1	670	14.0	**669**	**14.0**	665	14.1	670	14.0	**669**	**14.0**
444.namd	756	10.6	756	10.6	**756**	**10.6**	**753**	**10.6**	753	10.7	764	10.5
447.dealII	580	19.7	581	19.7	**580**	**19.7**	549	20.8	**549**	**20.8**	550	20.8
450.soplex	781	10.7	783	10.7	**783**	**10.7**	732	11.4	**730**	**11.4**	729	11.4
453.povray	328	16.2	**330**	**16.1**	330	16.1	**284**	**18.8**	284	18.8	286	18.6
454.calculix	775	10.6	776	10.6	**776**	**10.6**	531	15.5	531	15.5	**531**	**15.5**
459.GemsFDTD	678	15.7	**677**	**15.7**	677	15.7	663	16.0	**664**	**16.0**	665	16.0
465.tonto	692	14.2	733	13.4	**733**	**13.4**	**663**	**14.8**	666	14.8	660	14.9
470.lbm	2150	6.39	2157	6.37	**2153**	**6.38**	**838**	**16.4**	839	16.4	838	16.4
481.wrf	684	16.3	681	16.4	**683**	**16.4**	712	15.7	**714**	**15.6**	715	15.6
482.sphinx3	1128	17.3	**1126**	**17.3**	1121	17.4	1115	17.5	1133	17.2	**1123**	**17.4**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

General Notes

```
OMP_NUM_THREADS set to number of cores
KMP_AFFINITY set to physical,0
KMP_STACKSIZE set to 200M
```

Base Compiler Invocation

C benchmarks:
`icc`

C++ benchmarks:
`icpc`

Continued on next page

Base Compiler Invocation (Continued)

Fortran benchmarks:
ifort

Benchmarks using both Fortran and C:
icc ifort

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
-fast -parallel

C++ benchmarks:
-fast -parallel

Fortran benchmarks:
-fast -parallel

Benchmarks using both Fortran and C:
-fast -parallel

Peak Compiler Invocation

C benchmarks (except as noted below):
/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070824/Linux32/bin/icc
-L/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070824/Linux32/lib

Continued on next page

Peak Compiler Invocation (Continued)

C benchmarks (except as noted below) (continued):
`-I/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070824/Linux32/include`

433.milc: `icc`

C++ benchmarks (except as noted below):
`icpc`

450.soplex: `/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070824/Linux32/bin/icpc`
`-L/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070824/Linux32/lib`
`-I/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070824/Linux32/include`

Fortran benchmarks:
`ifort`

Benchmarks using both Fortran and C:
`icc ifort`

Peak Portability Flags

410.bwaves: `-DSPEC_CPU_LP64`
416.gamess: `-DSPEC_CPU_LP64`
433.milc: `-DSPEC_CPU_LP64`
434.zeusmp: `-DSPEC_CPU_LP64`
435.gromacs: `-DSPEC_CPU_LP64 -nofor_main`
436.cactusADM: `-DSPEC_CPU_LP64 -nofor_main`
437.leslie3d: `-DSPEC_CPU_LP64`
444.namd: `-DSPEC_CPU_LP64`
447.dealII: `-DSPEC_CPU_LP64`
453.povray: `-DSPEC_CPU_LP64`
454.calculix: `-DSPEC_CPU_LP64 -nofor_main`
459.GemsFDTD: `-DSPEC_CPU_LP64`
465.tonto: `-DSPEC_CPU_LP64`
481.wrf: `-DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX`

Peak Optimization Flags

C benchmarks:

433.milc: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -fno-alias`
`-auto-ilp32`

470.lbm: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -unroll2`
`-scalar-rep- -prefetch -opt-malloc-options=3`

Continued on next page

Peak Optimization Flags (Continued)

482.sphinx3: `-fast -unroll2`

C++ benchmarks:

444.namd: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -fno-alias -auto-ilp32`

447.dealII: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -unroll2 -ansi-alias -scalar-rep-`

450.soplex: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -opt-malloc-options=3`

453.povray: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -unroll4 -ansi-alias`

Fortran benchmarks:

410.bwaves: `-fast -prefetch -parallel`

416.gamess: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -unroll2 -Ob0 -ansi-alias -scalar-rep-`

434.zeusmp: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast`

437.leslie3d: `basepeak = yes`

459.GemsFDTD: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -unroll2 -Ob0 -prefetch -parallel`

465.tonto: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -unroll4 -auto`

Benchmarks using both Fortran and C:

435.gromacs: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -prefetch -auto-ilp32`

436.cactusADM: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -unroll2 -prefetch -parallel -auto-ilp32`

454.calculix: `-fast -unroll-aggressive -auto-ilp32`

481.wrf: `-fast -parallel -prefetch -auto-ilp32`

The flags file that was used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/Intel-ic10.1-FP-intel64-linux-flags.20090714.22.html`

You can also download the XML flags source by saving the following link:
`http://www.spec.org/cpu2006/flags/Intel-ic10.1-FP-intel64-linux-flags.20090714.22.xml`

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Jul 22 14:37:45 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 13 November 2007.