SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM BladeCenter HS21 (Intel Xeon X5365)

SPECint®2006 = 23.6

SPECint_base2006 = 20.3

CPU2006 license: 11
Test sponsor: IBM Corporation
Tested by: IBM Corporation

Test date: Sep-2007
Hardware Availability: Sep-2007
Software Availability: Nov-2007

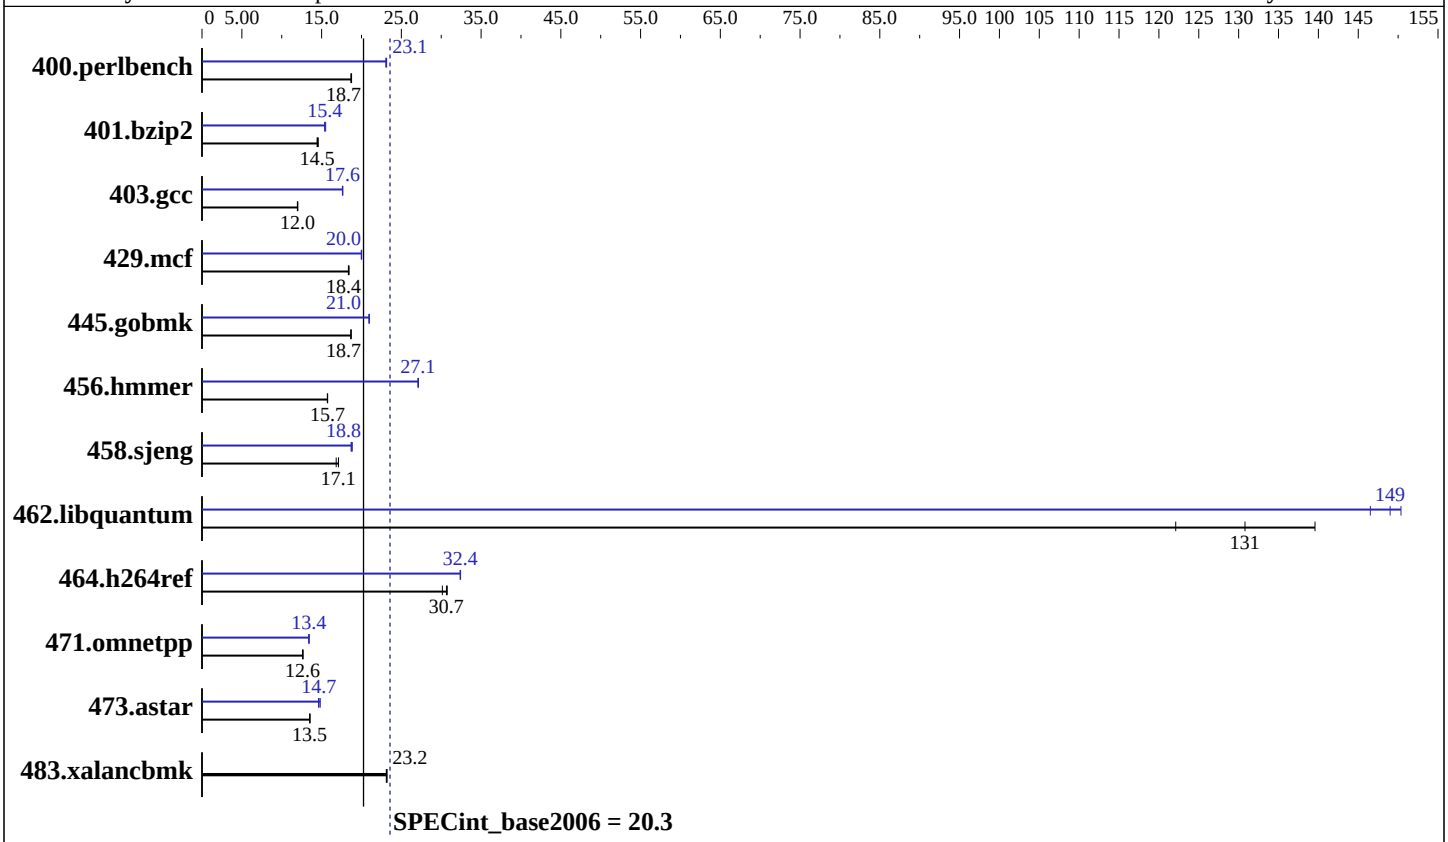

Hardware

CPU Name:	Intel Xeon X5365
CPU Characteristics:	1333MHz system bus
CPU MHz:	3000
FPU:	Integrated
CPU(s) enabled:	8 cores, 2 chips, 4 cores/chip
CPU(s) orderable:	1,2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	8 MB I+D on chip per chip, 4 MB shared / 2 cores
L3 Cache:	None
Other Cache:	None
Memory:	16 GB (8 x 2 GB DDR2-5300F ECC)
Disk Subsystem:	1 x 36 GB SAS, 10000 RPM
Other Hardware:	Memory and I/O Expansion Unit (P/N 42C1600)

Software

Operating System:	SLES 10 (x86_64), 2.6.16.21-0.8-smp
Compiler:	Intel C++ Compiler for Linux version 10.1 Build 20070824
Auto Parallel:	Yes
File System:	ReiserFS
System State:	Multi-user, run level 3
Base Pointers:	32-bit
Peak Pointers:	32/64-bit
Other Software:	MicroQuill SmartHeap 8.1

SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM BladeCenter HS21 (Intel Xeon X5365)

SPECint2006 = 23.6

SPECint_base2006 = 20.3

CPU2006 license: 11
Test sponsor: IBM Corporation
Tested by: IBM Corporation

Test date: Sep-2007
Hardware Availability: Sep-2007
Software Availability: Nov-2007

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	523	18.7	**522**	**18.7**	521	18.8	422	23.2	424	23.1	**423**	**23.1**
401.bzip2	662	14.6	**666**	**14.5**	669	14.4	**625**	**15.4**	627	15.4	622	15.5
403.gcc	673	12.0	**671**	**12.0**	670	12.0	**457**	**17.6**	457	17.6	456	17.7
429.mcf	497	18.4	**496**	**18.4**	494	18.5	455	20.0	**456**	**20.0**	457	20.0
445.gobmk	561	18.7	**561**	**18.7**	561	18.7	500	21.0	500	21.0	**500**	**21.0**
456.hmmer	592	15.7	**592**	**15.7**	594	15.7	344	27.2	344	27.1	**344**	**27.1**
458.sjeng	**707**	**17.1**	719	16.8	707	17.1	647	18.7	642	18.8	**645**	**18.8**
462.libquantum	170	122	148	140	**158**	**131**	138	150	141	147	**139**	**149**
464.h264ref	720	30.8	734	30.1	**722**	**30.7**	682	32.4	**683**	**32.4**	683	32.4
471.omnetpp	495	12.6	493	12.7	**495**	**12.6**	467	13.4	**466**	**13.4**	465	13.4
473.astar	519	13.5	519	13.5	**519**	**13.5**	**478**	**14.7**	481	14.6	473	14.8
483.xalancbmk	298	23.2	299	23.1	**298**	**23.2**	298	23.2	299	23.1	**298**	**23.2**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

General Notes

```
OMP_NUM_THREADS set to number of cores
KMP_AFFINITY set to physical,0
KMP_STACKSIZE set to 8M
```

Base Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
-fast -vec-guard-write -opt-malloc-options=3 -parallel
-par-runtime-control

Continued on next page

Base Optimization Flags (Continued)

C++ benchmarks:
`-xT -ipo -O3 -no-prec-div -Wl,-z,muldefs`
`-L/home/cmplr/usr3/alrahate/cpu2006.1.0/lib -lsmartheap`

Base Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

Peak Compiler Invocation

C benchmarks (except as noted below):
`icc`

401.bzip2: `/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070824/Linux64/bin/icc`
`-L/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070824/Linux64/lib`
`-I/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070824/Linux64/include`

456.hmmer: `/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070824/Linux64/bin/icc`
`-L/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070824/Linux64/lib`
`-I/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070824/Linux64/include`

C++ benchmarks:
`icpc`

Peak Portability Flags

400.perlbench: `-DSPEC_CPU_LINUX_IA32`
401.bzip2: `-DSPEC_CPU_LP64`
456.hmmer: `-DSPEC_CPU_LP64`
462.libquantum: `-DSPEC_CPU_LINUX`
483.xalancbmk: `-DSPEC_CPU_LINUX`

Peak Optimization Flags

C benchmarks:

400.perlbench: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -ansi-alias`
`-prefetch`

Continued on next page

Peak Optimization Flags (Continued)

401.bzip2: -prof-gen(pass 1) -prof-use(pass 2) -fast -prefetch -auto-ilp32

403.gcc: -fast -inline-calloc -opt-malloc-options=3

429.mcf: -fast -prefetch

445.gobmk: -prof-gen(pass 1) -prof-use(pass 2) -xT -O2 -ipo -no-prec-div -ansi-alias

456.hmmer: -fast -unroll2 -ansi-alias -opt-multi-version-aggressive -auto-ilp32

458.sjeng: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll4

462.libquantum: -fast -unroll4 -Ob0 -prefetch -opt-streaming-stores always -vec-guard-write -opt-malloc-options=3 -parallel -par-runtime-control

464.h264ref: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -prof-gen(pass 1) -prof-use(pass 2) -xT -O3 -ipo -no-prec-div -ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs -L/home/cmplr/usr3/alrahate/cpu2006.1.0/lib -lsmartheap

473.astar: -prof-gen(pass 1) -prof-use(pass 2) -xT -O3 -ipo -no-prec-div -ansi-alias -opt-ra-region-strategy=routine -Wl,-z,muldefs -L/home/cmplr/usr3/alrahate/cpu2006.1.0/lib -lsmartheap

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags file that was used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Intel-ic10-ia32-intel64-linux-flags.20090714.02.html

You can also download the XML flags source by saving the following link:
http://www.spec.org/cpu2006/flags/Intel-ic10-ia32-intel64-linux-flags.20090714.02.xml

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM BladeCenter HS21 (Intel Xeon X5365)

SPECint2006 = 23.6

SPECint_base2006 = 20.3

CPU2006 license: 11
Test sponsor: IBM Corporation
Tested by: IBM Corporation

Test date: Sep-2007
Hardware Availability: Sep-2007
Software Availability: Nov-2007

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Jul 22 14:41:41 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 13 November 2007.