SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM System p 570 (4.7 GHz, 4 core, RHEL)

SPECint®_rate2006 = 122

SPECint_rate_base2006 = 108

CPU2006 license: 11
Test sponsor: IBM Corporation
Tested by: IBM Corporation

Test date: Oct-2007
Hardware Availability: Jun-2007
Software Availability: Oct-2007

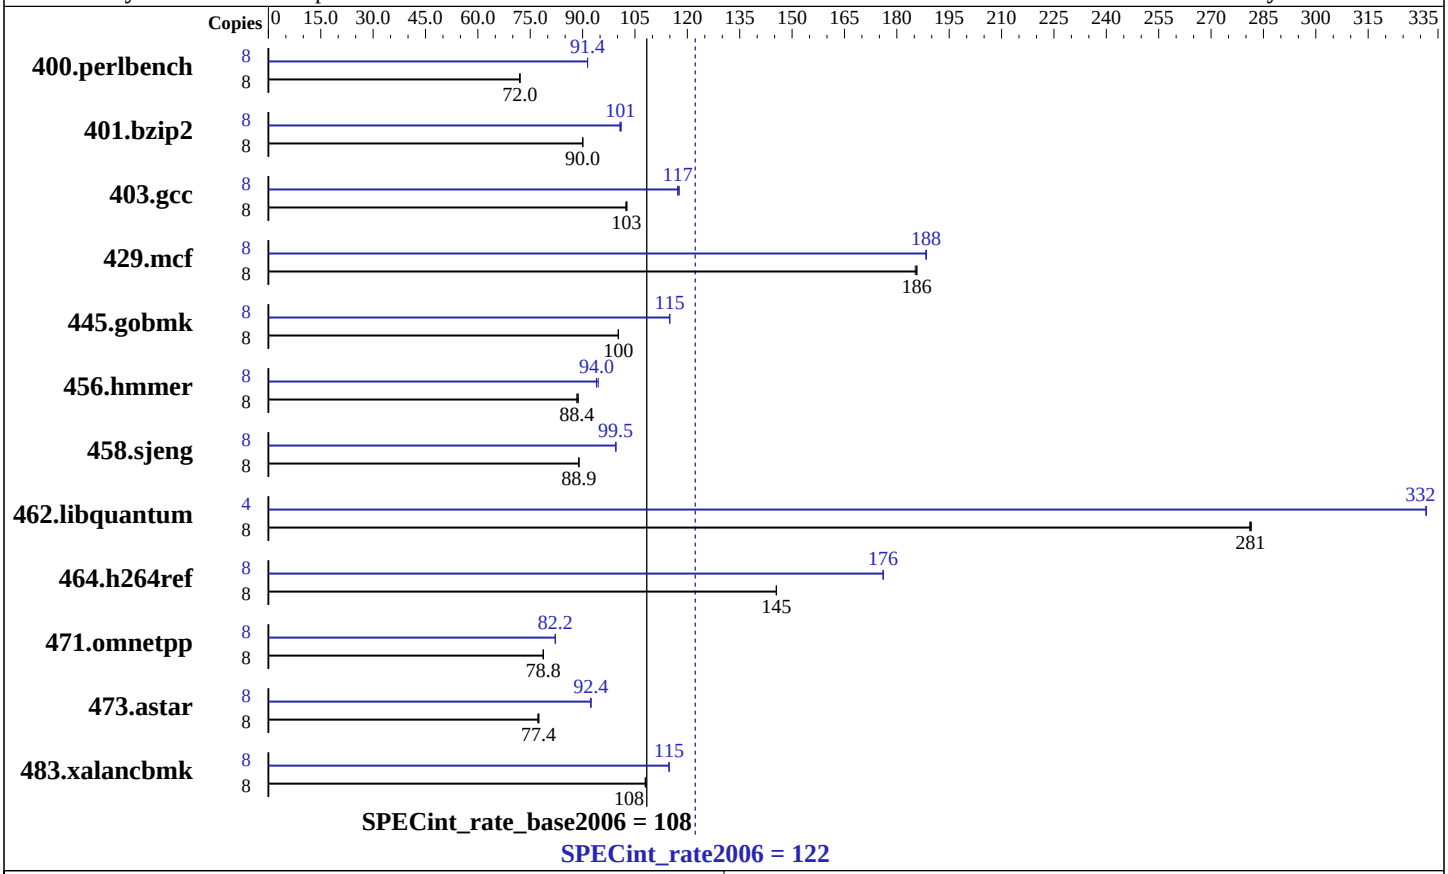

Hardware

CPU Name:	POWER6
CPU Characteristics:	
CPU MHz:	4700
FPU:	Integrated
CPU(s) enabled:	4 cores, 2 chips, 2 cores/chip, 2 threads/core
CPU(s) orderable:	2,4,8,12,16 cores
Primary Cache:	64 KB I + 64 KB D on chip per core
Secondary Cache:	4 MB I+D on chip per core
L3 Cache:	32 MB I+D off chip per chip
Other Cache:	None
Memory:	32 GB (16x2 GB) DDR2 667 MHz
Disk Subsystem:	2x73 GB SAS 15K RPM
Other Hardware:	None

Software

Operating System:	Red Hat Enterprise Linux Advanced Platform 5.1 for IBM POWER
Compiler:	IBM XL C/C++ Advanced Edition for Linux, V9.0
Auto Parallel:	No
File System:	ext3
System State:	Multi-User
Base Pointers:	32-bit
Peak Pointers:	32/64-bit
Other Software:	-IBM Post-Link Optimization for Linux on POWER, Version 5.4.0-10 -MicroQuill SmartHeap 8.1

SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM System p 570 (4.7 GHz, 4 core, RHEL)

SPECint_rate2006 = 122

SPECint_rate_base2006 = 108

CPU2006 license: 11
Test sponsor: IBM Corporation
Tested by: IBM Corporation

Test date: Oct-2007
Hardware Availability: Jun-2007
Software Availability: Oct-2007

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	8	**1085**	**72.0**	1085	72.1	1085	72.0	8	**855**	**91.4**	855	91.4	855	91.4
401.bzip2	8	**858**	**90.0**	858	90.0	857	90.1	8	**765**	**101**	764	101	767	101
403.gcc	8	629	102	627	103	**628**	**103**	8	549	117	547	118	**548**	**117**
429.mcf	8	394	185	393	186	**393**	**186**	8	387	188	387	188	**387**	**188**
445.gobmk	8	837	100	**837**	**100**	838	100	8	**730**	**115**	730	115	730	115
456.hmmer	8	**844**	**88.4**	844	88.4	841	88.8	8	794	94.0	790	94.5	**794**	**94.0**
458.sjeng	8	1088	88.9	1089	88.9	**1088**	**88.9**	8	973	99.5	**973**	**99.5**	973	99.5
462.libquantum	8	**589**	**281**	590	281	589	282	4	250	332	**250**	**332**	250	332
464.h264ref	8	1217	146	1217	145	**1217**	**145**	8	1005	176	1006	176	**1005**	**176**
471.omnetpp	8	**635**	**78.8**	635	78.7	635	78.8	8	608	82.2	**608**	**82.2**	609	82.2
473.astar	8	728	77.2	**725**	**77.4**	725	77.5	8	608	92.3	608	92.4	**608**	**92.4**
483.xalancbmk	8	**511**	**108**	511	108	511	108	8	**481**	**115**	481	115	481	115

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

General Notes

```
kernel release 2.6.18-52.el5.

See flags file for details on following settings.

ulimit -s (stack) set to 262144.


System set to Enhanced mode when defining partition on HMC

Large pages reserved as follows by root user:
    echo 800 > /proc/sys/vm/nr_hugepages
System configured with libhugetlbfs library for application access to large pages
Environment variables set before executing benchmarks.
    export HUGETLB_VERBOSE=0
    export HUGETLB_MORECORE=yes
    export XLFRTEOPTS=intrinthds=1

fdpr binary optimization tool used for
    400.perlbench 401.bzip2 403.gcc 429.mcf 456.hmmer 458.sjeng
    462.libquantum 464.h264ref 473.astar 483.xalancbmk

Benchmarks bound to a processor using numactl on the submit command.
```

Base Compiler Invocation

C benchmarks:
```
xlc -qlanglvl=extc99
```

C++ benchmarks:
```
xlC
```

Base Portability Flags

400.perlbench: `-DSPEC_CPU_LINUX_PPC`
462.libquantum: `-DSPEC_CPU_LINUX`
464.h264ref: `-qchars=signed`
483.xalancbmk: `-DSPEC_CPU_LINUX`

Base Optimization Flags

C benchmarks:
```
-O5 -qalias=noansi -qalloca -lhugetlbfs
```

C++ benchmarks:
```
-O5 -qrtti -lsmartheap
```

Base Other Flags

C benchmarks:
```
-qipa=noobject -qipa=threads
```

C++ benchmarks:
```
-qipa=noobject -qipa=threads
```

Peak Compiler Invocation

C benchmarks:
```
xlc -qlanglvl=extc99
```

C++ benchmarks:
```
xlC
```

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_PPC
403.gcc: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LINUX
464.h264ref: -qchars=signed
483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -Wl,-q -qpdf1(pass 1) -qpdf2(pass 2) -O4 -qalias=noansi -lsmartheap

401.bzip2: -Wl,-q -qpdf1(pass 1) -qpdf2(pass 2) -O4 -lhugetlbfs

403.gcc: -Wl,-q -qpdf1(pass 1) -qpdf2(pass 2) -O4 -qalloca -q64 -lhugetlbfs

429.mcf: -Wl,-q -O5 -qnoenablevmx -lhugetlbfs

445.gobmk: -qpdf1(pass 1) -qpdf2(pass 2) -O4 -qnoenablevmx -lhugetlbfs

456.hmmer: Same as 401.bzip2

458.sjeng: Same as 401.bzip2

462.libquantum: -Wl,-q -qpdf1(pass 1) -qpdf2(pass 2) -O5 -qnoenablevmx -q64 -lhugetlbfs

464.h264ref: -Wl,-q -qpdf1(pass 1) -qpdf2(pass 2) -O5 -q64 -lhugetlbfs

C++ benchmarks:

471.omnetpp: -qpdf1(pass 1) -qpdf2(pass 2) -O5 -qrtti -lsmartheap

473.astar: -Wl,-q -qpdf1(pass 1) -qpdf2(pass 2) -O5 -qnoenablevmx -lsmartheap

483.xalancbmk: -Wl,-q -O4 -lsmartheap

Peak Other Flags

C benchmarks:
-qipa=noobject -qipa=threads

Continued on next page

Peak Other Flags (Continued)

C++ benchmarks:
`-qipa=noobject -qipa=threads`

The flags file that was used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/lop-xl-flags.20090714.html`

You can also download the XML flags source by saving the following link:
`http://www.spec.org/cpu2006/flags/lop-xl-flags.20090714.xml`

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Jul 22 14:30:53 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 27 November 2007.