SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated

Acer Altos R520 (Intel Xeon E5345)

SPECfp®_rate2006 = 34.3

SPECfp_rate_base2006 = 32.2

CPU2006 license: 97
Test sponsor: Acer Incorporated
Tested by: Acer Incorporated

Test date: Oct-2007
Hardware Availability: Nov-2006
Software Availability: Nov-2007

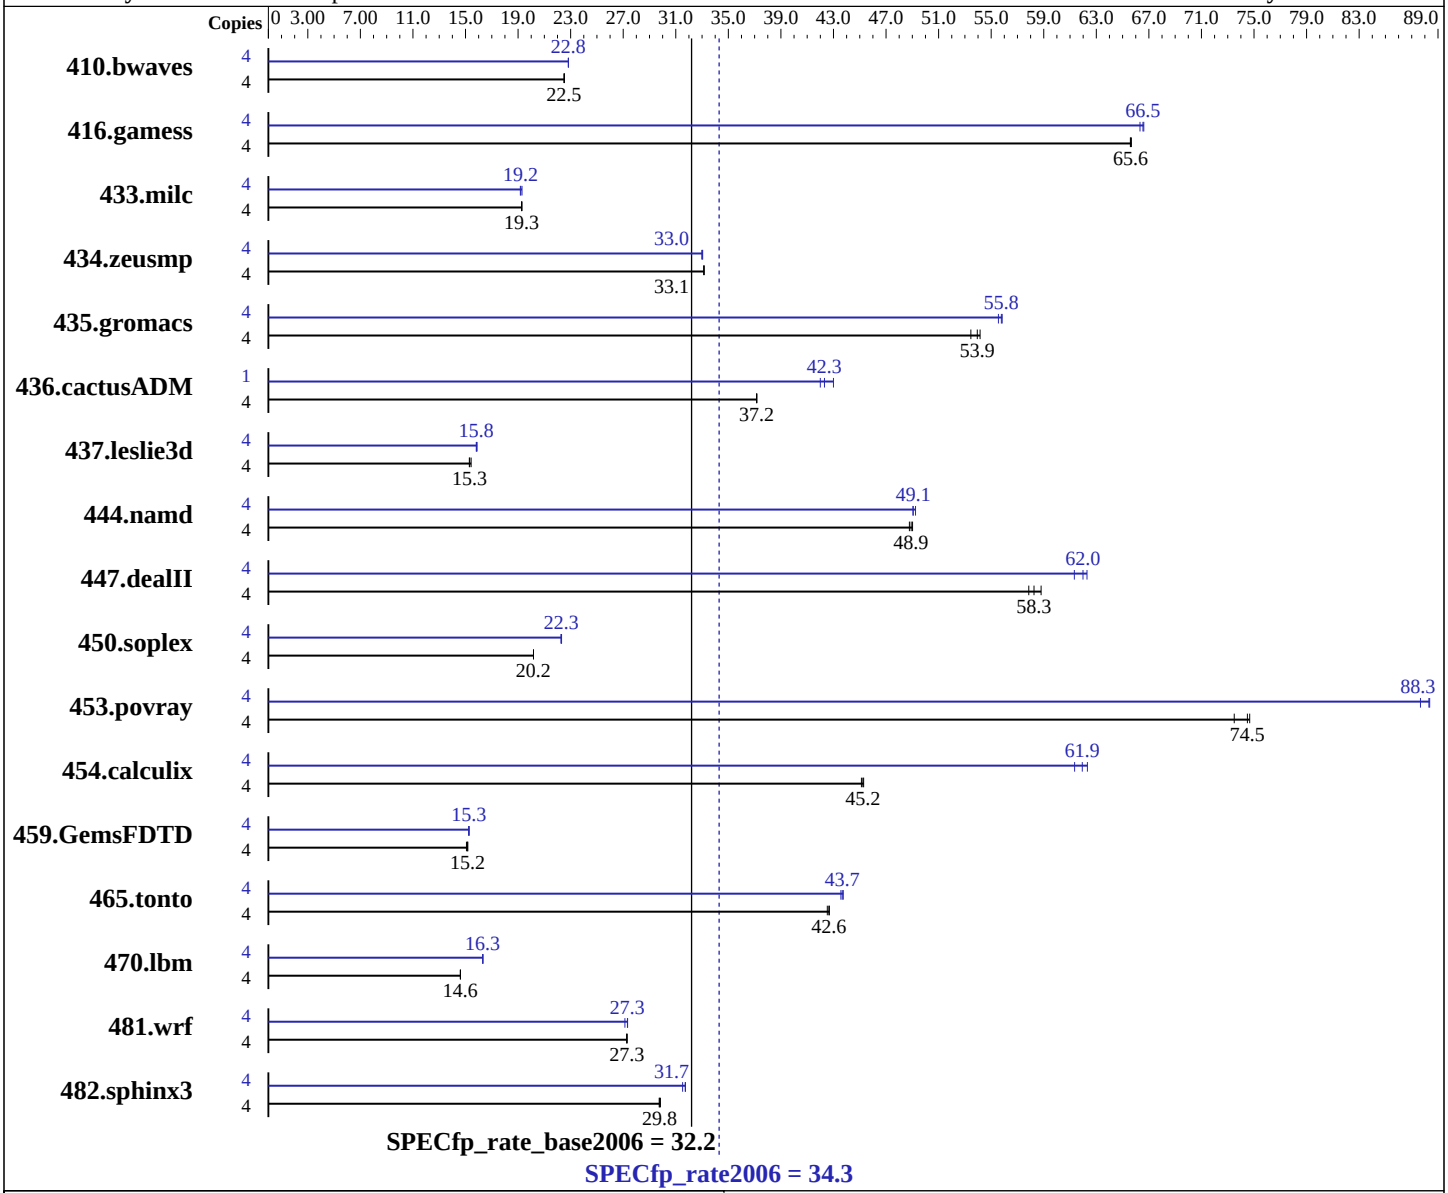

Hardware

CPU Name:	Intel Xeon E5345
CPU Characteristics:	1333MHz system bus
CPU MHz:	2330
FPU:	Integrated
CPU(s) enabled:	4 cores, 1 chip, 4 cores/chip
CPU(s) orderable:	1, 2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	8 MB I+D on chip per chip, 4 MB shared / 2 cores

Continued on next page

Software

Operating System:	SuSE Linux Enterprise Server 10 EM64T (kernel 2.6.16.21-0.8-smp)
Compiler:	Intel C++ and Fortran Compiler for Linux32 and Linux64 version 10.1 Build 20070725
Auto Parallel:	Yes
File System:	ReiserFS
System State:	Multi-user, level 3
Base Pointers:	64-bit

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated

Acer Altos R520 (Intel Xeon E5345)

SPECfp_rate2006 = 34.3

SPECfp_rate_base2006 = 32.2

CPU2006 license: 97
Test sponsor: Acer Incorporated
Tested by: Acer Incorporated

Test date: Oct-2007
Hardware Availability: Nov-2006
Software Availability: Nov-2007

L3 Cache: None
Other Cache: None
Memory: 16 GB (8 x 2048MB ECC FB-DIMM DDR2-667 CL5-5-5)
Disk Subsystem: 1 x 73GB 10000PRM SAS HDD
Other Hardware: None

Peak Pointers: 32/64-bit
Other Software: MicroQuill SmartHeap Library 8.1

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	4	2413	22.5	**2415**	**22.5**	2416	22.5	4	2380	22.8	2382	22.8	**2381**	**22.8**
416.gamess	4	1194	65.6	**1193**	**65.6**	1193	65.7	4	**1177**	**66.5**	1181	66.3	1176	66.6
433.milc	4	1903	19.3	1906	19.3	**1906**	**19.3**	4	1915	19.2	**1912**	**19.2**	1903	19.3
434.zeusmp	4	**1098**	**33.1**	1098	33.2	1099	33.1	4	1104	33.0	1101	33.0	**1103**	**33.0**
435.gromacs	4	534	53.5	527	54.2	**529**	**53.9**	4	511	55.8	514	55.6	**512**	**55.8**
436.cactusADM	4	1287	37.1	**1286**	**37.2**	1286	37.2	1	278	43.0	285	42.0	**282**	**42.3**
437.leslie3d	4	2437	15.4	2459	15.3	**2454**	**15.3**	4	2377	15.8	**2375**	**15.8**	2367	15.9
444.namd	4	654	49.0	**656**	**48.9**	658	48.8	4	**654**	**49.1**	654	49.1	651	49.2
447.dealII	4	791	57.9	778	58.8	**785**	**58.3**	4	746	61.3	**738**	**62.0**	735	62.3
450.soplex	4	1654	20.2	**1654**	**20.2**	1654	20.2	4	1495	22.3	**1496**	**22.3**	1498	22.3
453.povray	4	290	73.5	285	74.7	**286**	**74.5**	4	241	88.4	243	87.7	**241**	**88.3**
454.calculix	4	731	45.1	**730**	**45.2**	729	45.3	4	**533**	**61.9**	530	62.3	538	61.3
459.GemsFDTD	4	2798	15.2	**2798**	**15.2**	2816	15.1	4	2785	15.2	**2781**	**15.3**	2778	15.3
465.tonto	4	922	42.7	**923**	**42.6**	925	42.5	4	**901**	**43.7**	903	43.6	900	43.7
470.lbm	4	3760	14.6	3762	14.6	**3762**	**14.6**	4	3369	16.3	**3368**	**16.3**	3368	16.3
481.wrf	4	1637	27.3	1639	27.3	**1638**	**27.3**	4	1647	27.1	**1635**	**27.3**	1635	27.3
482.sphinx3	4	2613	29.8	2622	29.7	**2619**	**29.8**	4	**2458**	**31.7**	2473	31.5	2456	31.7

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

General Notes

```
This result was measured on the Acer Altos R520.
The Altos R720 and Altos R520 are electronically equivalent.

BIOS Settings
  Hardware Prefetcher set to OFF

  Adjacent Cache Line Prefetch set to OFF

  Optimization for high-frequency FSB applications set to ON

All results used taskset to bind processes to cores.
```

Base Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc

Fortran benchmarks:
ifort

Benchmarks using both Fortran and C:
icc ifort

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
-fast

C++ benchmarks:
-fast

Fortran benchmarks:
-fast

Benchmarks using both Fortran and C:
-fast

Peak Compiler Invocation

C benchmarks (except as noted below):
```
/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux32/bin/icc
-L/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux32/lib
-I/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux32/include
```

433.milc: `icc`

C++ benchmarks (except as noted below):
```
icpc
```

450.soplex: `/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux32/bin/icpc -L/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux32/lib -I/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux32/include`

Fortran benchmarks (except as noted below):
```
ifort
```

437.leslie3d: `/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux32/bin/ifort -L/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux32/lib -I/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux32/include`

Benchmarks using both Fortran and C:
```
icc ifort
```

Peak Portability Flags

410.bwaves: `-DSPEC_CPU_LP64`
416.gamess: `-DSPEC_CPU_LP64`
433.milc: `-DSPEC_CPU_LP64`
434.zeusmp: `-DSPEC_CPU_LP64`
435.gromacs: `-DSPEC_CPU_LP64 -nofor_main`
436.cactusADM: `-DSPEC_CPU_LP64 -nofor_main`
444.namd: `-DSPEC_CPU_LP64`
447.dealII: `-DSPEC_CPU_LP64`
453.povray: `-DSPEC_CPU_LP64`
454.calculix: `-DSPEC_CPU_LP64 -nofor_main`
459.GemsFDTD: `-DSPEC_CPU_LP64`
465.tonto: `-DSPEC_CPU_LP64`
481.wrf: `-DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX`

Peak Optimization Flags

C benchmarks:

433.milc: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -fno-alias -auto-ilp32`

Continued on next page

Peak Optimization Flags (Continued)

470.lbm: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -unroll2 -scalar-rep- -prefetch -opt-malloc-options=3`

482.sphinx3: `-fast -unroll2`

C++ benchmarks:

444.namd: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -fno-alias -auto-ilp32`

447.dealII: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -unroll2 -ansi-alias -scalar-rep-`

450.soplex: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -opt-malloc-options=3`

453.povray: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -unroll4 -ansi-alias`

Fortran benchmarks:

410.bwaves: `-fast -prefetch`

416.gamess: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -unroll2 -Ob0 -ansi-alias -scalar-rep-`

434.zeusmp: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast`

437.leslie3d: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -prefetch -opt-malloc-options=3`

459.GemsFDTD: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -unroll2 -Ob0 -prefetch`

465.tonto: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -unroll4 -auto`

Benchmarks using both Fortran and C:

435.gromacs: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -prefetch -auto-ilp32`

436.cactusADM: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -unroll2 -prefetch -parallel -auto-ilp32`

454.calculix: `-fast -unroll-aggressive -auto-ilp32`

481.wrf: `-fast -auto-ilp32`

The flags file that was used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Intel-ic10.1-FP-intel64-linux-flags.20090714.17.html

You can also download the XML flags source by saving the following link:
http://www.spec.org/cpu2006/flags/Intel-ic10.1-FP-intel64-linux-flags.20090714.17.xml

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Jul 22 13:37:50 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 30 November 2007.