SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/120Li
(Intel Xeon processor 5110)

SPECint®_rate2006 = 40.2

SPECint_rate_base2006 = 37.0

CPU2006 license: 9006
Test sponsor: NEC Corporation
Tested by: NEC Corporation

Test date: Oct-2007
Hardware Availability: May-2007
Software Availability: Jun-2007

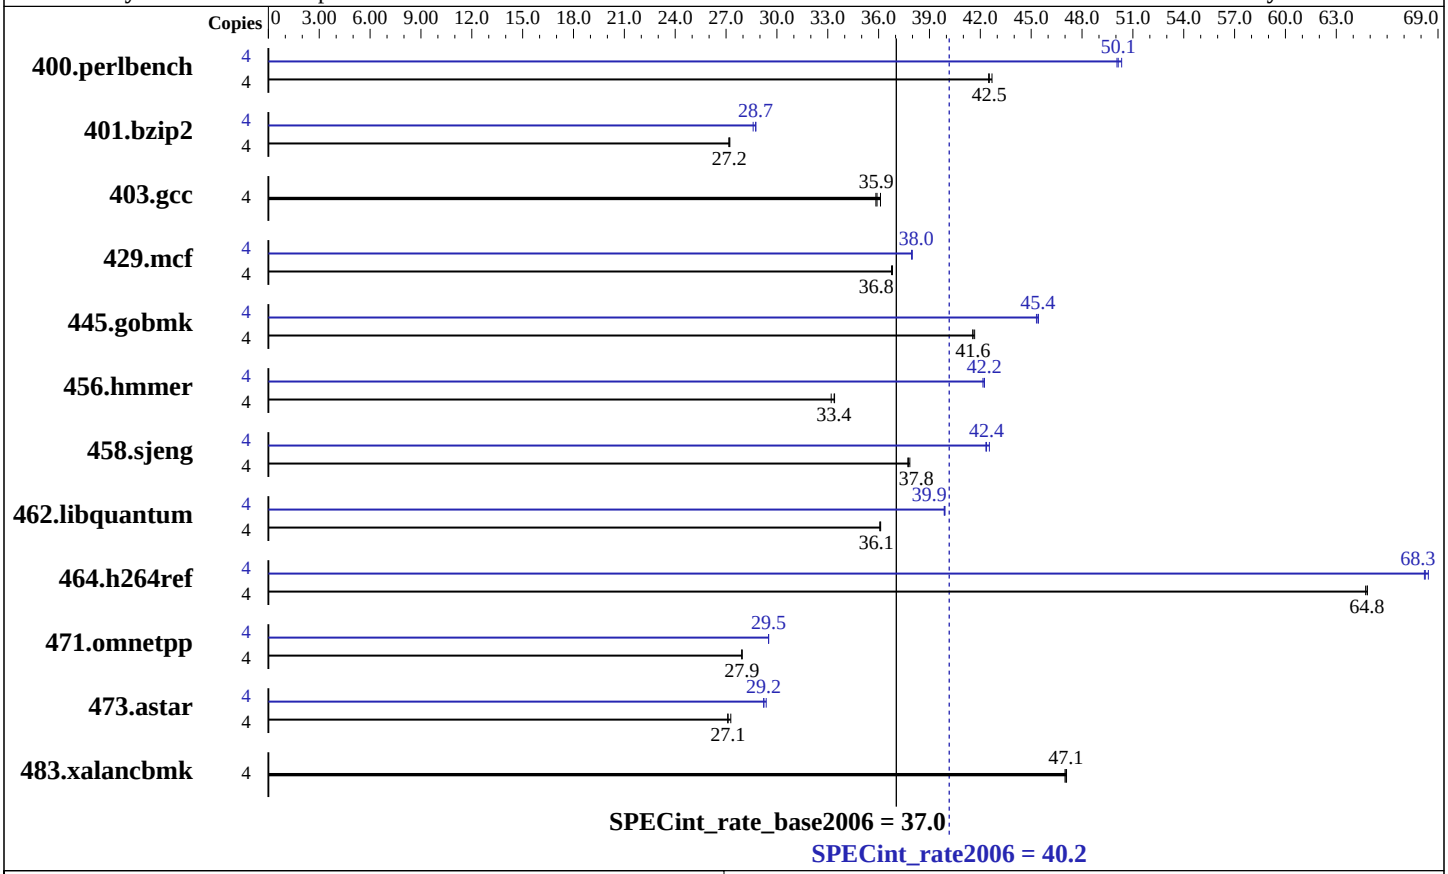

Hardware

CPU Name:	Intel Xeon 5110
CPU Characteristics:	1.60 GHz, 4 MB L2, 1066 MHz bus
CPU MHz:	1600
FPU:	Integrated
CPU(s) enabled:	4 cores, 2 chips, 2 cores/chip
CPU(s) orderable:	1,2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	4 MB I+D on chip per chip
L3 Cache:	None
Other Cache:	None
Memory:	8 GB (8x1 GB PC2-5300F, 2 rank, CL5-5-5, ECC)
Disk Subsystem:	1x73.2 GB SAS, 15000RPM
Other Hardware:	None

Software

Operating System:	64-Bit SUSE LINUX Enterprise Server 10, Kernel 2.6.16.21-0.8-smp for x86_64
Compiler:	Intel C++ Compiler for IA32/EM64T application, Version 10.0 - Build 20070426 Package ID: l_cc_p_10.0.023
Auto Parallel:	No
File System:	ext2
System State:	Multiuser, Runlevel 3
Base Pointers:	32-bit
Peak Pointers:	32/64-bit
Other Software:	MicroQuill SmartHeap library 8.1 binutils-2.17.tar.gz, Version 2.17

SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/120Li
(Intel Xeon processor 5110)

SPECint_rate2006 = 40.2

SPECint_rate_base2006 = 37.0

CPU2006 license: 9006
Test sponsor: NEC Corporation
Tested by: NEC Corporation

Test date: Oct-2007
Hardware Availability: May-2007
Software Availability: Jun-2007

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	4	915	42.7	920	42.5	**919**	**42.5**	4	**779**	**50.1**	781	50.1	776	50.3
401.bzip2	4	1418	27.2	1421	27.2	**1420**	**27.2**	4	1350	28.6	**1343**	**28.7**	1342	28.8
403.gcc	4	898	35.8	892	36.1	**897**	**35.9**	4	898	35.8	892	36.1	**897**	**35.9**
429.mcf	4	991	36.8	**991**	**36.8**	992	36.8	4	961	38.0	**961**	**38.0**	961	37.9
445.gobmk	4	1007	41.7	1010	41.6	**1010**	**41.6**	4	924	45.4	926	45.3	**924**	**45.4**
456.hmmer	4	1124	33.2	**1118**	**33.4**	1117	33.4	4	883	42.2	885	42.2	**884**	**42.2**
458.sjeng	4	**1282**	**37.8**	1279	37.8	1283	37.7	4	1138	42.5	**1142**	**42.4**	1143	42.3
462.libquantum	4	2295	36.1	2297	36.1	**2297**	**36.1**	4	2079	39.9	**2078**	**39.9**	2076	39.9
464.h264ref	4	**1366**	**64.8**	1368	64.7	1365	64.8	4	1294	68.4	**1297**	**68.3**	1298	68.2
471.omnetpp	4	895	27.9	**895**	**27.9**	895	27.9	4	847	29.5	**847**	**29.5**	847	29.5
473.astar	4	**1035**	**27.1**	1036	27.1	1029	27.3	4	961	29.2	956	29.4	**961**	**29.2**
483.xalancbmk	4	587	47.0	586	47.1	**587**	**47.1**	4	587	47.0	586	47.1	**587**	**47.1**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run
'/usr/bin/taskset' used to bind processes to CPUs

General Notes

All benchmarks compiled in 32-bit mode except 401.bzip2 and 456.hmmer,
for peak, are compiled in 64-bit mode

Base Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
462.libquantum: -DSPEC_CPU_LINUX

Continued on next page

Base Portability Flags (Continued)

483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
-fast

C++ benchmarks:
-xT -ipo -O3 -no-prec-div -Wl,-z,muldefs
-L/opt/SmartHeap_8.1/lib -lsmartheap

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):
icc

401.bzip2: /opt/intel/cce/10.0.023/bin/icc
-L/opt/intel/cce/10.0.023/lib
-I/opt/intel/cce/10.0.023/include

456.hmmer: /opt/intel/cce/10.0.023/bin/icc
-L/opt/intel/cce/10.0.023/lib
-I/opt/intel/cce/10.0.023/include

C++ benchmarks:
icpc

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
401.bzip2: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -ansi-alias -prefetch`

401.bzip2: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast`

403.gcc: `basepeak = yes`

429.mcf: `-fast -prefetch`

445.gobmk: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-xT -O2 -ipo -no-prec_div -ansi-alias`

456.hmmer: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -unroll2 -ansi-alias`

458.sjeng: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -unroll4`

462.libquantum: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -unroll4 -Ob0 -prefetch -opt-streaming-stores always`

464.h264ref: `Same as 456.hmmer`

C++ benchmarks:

471.omnetpp: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-xT -O3 -ipo -no-prec_div -ansi-alias -Wl,-z,muldefs -L/opt/SmartHeap_8.1/lib -lsmartheap`

473.astar: `Same as 471.omnetpp`

483.xalancbmk: `basepeak = yes`

Peak Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

The flags file that was used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/NEC-ic10-INT-ia32-intel64-linux-flags.html`

You can also download the XML flags source by saving the following link:
`http://www.spec.org/cpu2006/flags/NEC-ic10-INT-ia32-intel64-linux-flags.xml`

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Jul 22 14:26:52 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 27 November 2007.