



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp®_rate2006 = 39.7

PowerEdge 2950 (Intel Xeon 5130, 2.00 GHz)

SPECfp_rate_base2006 = 36.7

CPU2006 license: 55


Test date: Oct-2007

Test sponsor: Dell Inc.

Hardware Availability: Dec-2006

Tested by: Dell Inc.

Software Availability: Nov-2007

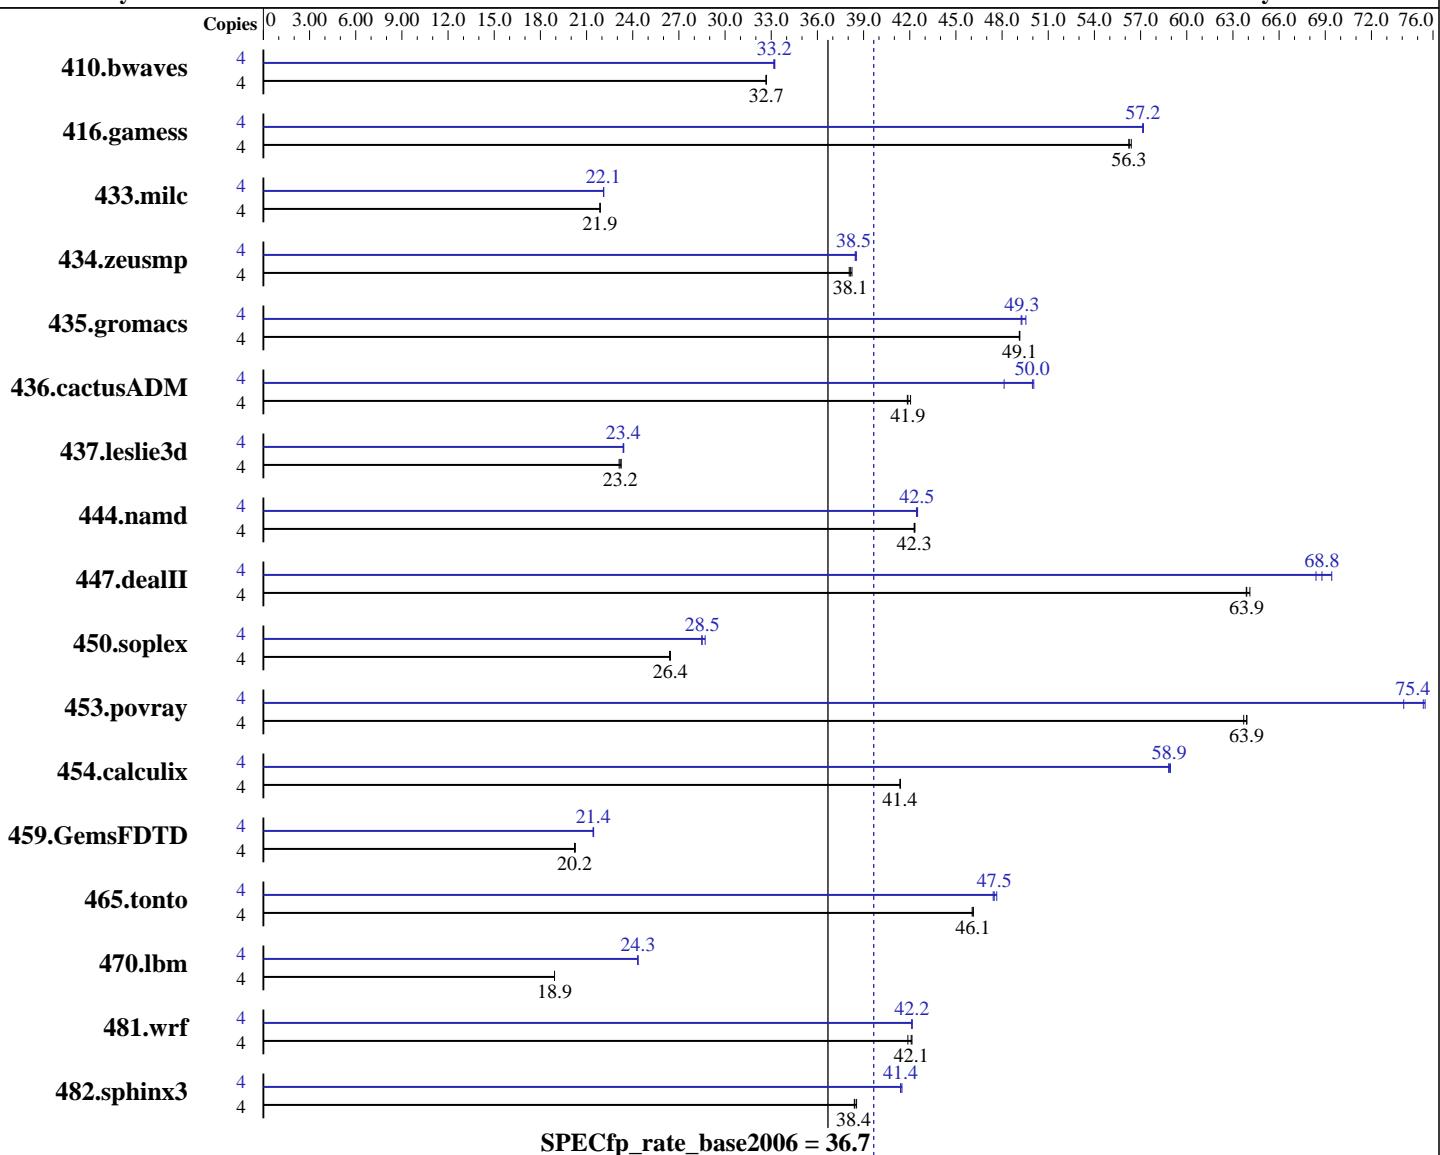

Hardware

CPU Name: Intel Xeon 5130
CPU Characteristics: 1333 MHz system bus
CPU MHz: 2000
FPU: Integrated
CPU(s) enabled: 4 cores, 2 chips, 2 cores/chip
CPU(s) orderable: 1,2 chips
Primary Cache: 32 KB I + 32 KB D on chip per core
Secondary Cache: 4 MB I+D on chip per chip

Software

Operating System: SUSE Linux Enterprise Server 10 (x86_64) SP1, Kernel 2.6.16.46-0.12-smp
Compiler: Intel C++ and Fortran Compiler for Linux32 and Linux64 version 10.1 Build 20070725
Auto Parallel: No
File System: ReiserFS
System State: Default
Base Pointers: 64-bit

Continued on next page

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp_rate2006 = 39.7

PowerEdge 2950 (Intel Xeon 5130, 2.00 GHz)

SPECfp_rate_base2006 = 36.7

CPU2006 license: 55

Test date: Oct-2007

Test sponsor: Dell Inc.

Hardware Availability: Dec-2006

Tested by: Dell Inc.

Software Availability: Nov-2007

L3 Cache: None
 Other Cache: None
 Memory: 16 GB (8x2 GB 667 MHz ECC CL5 FB-DIMM)
 Disk Subsystem: 1 x 73 GB SAS 15k RPM
 Other Hardware: None

Peak Pointers: 32/64-bit
 Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	4	1663	32.7	1664	32.7	1664	32.7	4	1637	33.2	1639	33.2	1636	33.2
416.gamess	4	1393	56.2	1392	56.3	1389	56.4	4	1370	57.2	1371	57.1	1370	57.2
433.milc	4	1678	21.9	1679	21.9	1678	21.9	4	1660	22.1	1662	22.1	1662	22.1
434.zeusmp	4	952	38.2	954	38.1	956	38.1	4	947	38.5	945	38.5	946	38.5
435.gromacs	4	581	49.1	581	49.1	581	49.1	4	580	49.2	579	49.3	576	49.5
436.cactusADM	4	1137	42.1	1142	41.8	1141	41.9	4	957	50.0	993	48.1	955	50.1
437.leslie3d	4	1617	23.3	1622	23.2	1627	23.1	4	1606	23.4	1608	23.4	1608	23.4
444.namd	4	759	42.3	758	42.3	758	42.3	4	755	42.5	755	42.5	756	42.4
447.dealII	4	716	63.9	716	63.9	714	64.1	4	665	68.8	669	68.4	659	69.4
450.soplex	4	1264	26.4	1262	26.4	1262	26.4	4	1171	28.5	1170	28.5	1162	28.7
453.povray	4	334	63.7	333	63.9	333	63.9	4	282	75.5	282	75.4	287	74.1
454.calculix	4	797	41.4	798	41.4	798	41.4	4	561	58.9	560	58.9	561	58.8
459.GemsFDTD	4	2094	20.3	2099	20.2	2098	20.2	4	1978	21.5	1980	21.4	1980	21.4
465.tonto	4	853	46.1	855	46.1	853	46.1	4	826	47.7	830	47.4	829	47.5
470.lbm	4	2905	18.9	2905	18.9	2905	18.9	4	2259	24.3	2258	24.3	2258	24.3
481.wrf	4	1067	41.9	1060	42.1	1061	42.1	4	1060	42.2	1060	42.2	1061	42.1
482.sphinx3	4	2030	38.4	2028	38.4	2023	38.5	4	1883	41.4	1879	41.5	1882	41.4

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Invocation Notes

OMP_NUM_THREADS set to number of cores

KMP_STACK_SIZE set to 64M

KMP_AFFINITY set to physical,0

Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run
 '/usr/bin/taskset' used to bind processes to CPUs



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge 2950 (Intel Xeon 5130, 2.00 GHz)

SPECfp_rate2006 = 39.7

CPU2006 license: 55

Test date: Oct-2007

Test sponsor: Dell Inc.

Hardware Availability: Dec-2006

Tested by: Dell Inc.

Software Availability: Nov-2007

Platform Notes

BIOS Settings:

Adjacent Cache Line Prefetch = Disabled (default Enabled)

Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

icc ifort

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:

-fast

C++ benchmarks:

-fast

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge 2950 (Intel Xeon 5130, 2.00 GHz)

SPECfp_rate2006 = 39.7

CPU2006 license: 55

Test date: Oct-2007

Test sponsor: Dell Inc.

Hardware Availability: Dec-2006

Tested by: Dell Inc.

Software Availability: Nov-2007

Base Optimization Flags (Continued)

Fortran benchmarks:

-fast

Benchmarks using both Fortran and C:

-fast

Peak Compiler Invocation

C benchmarks (except as noted below):

/home/cmpllr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux32/bin/icc
-L/home/cmpllr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux32/lib
-I/home/cmpllr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux32/include

433.milc: icc

C++ benchmarks (except as noted below):

icpc

450.soplex: /home/cmpllr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux32/bin/icpc
-L/home/cmpllr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux32/lib
-I/home/cmpllr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux32/include

Fortran benchmarks (except as noted below):

ifort

437.leslie3d: /home/cmpllr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux32/bin/ifort
-L/home/cmpllr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux32/lib
-I/home/cmpllr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux32/include

Benchmarks using both Fortran and C:

icc ifort

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge 2950 (Intel Xeon 5130, 2.00 GHz)

SPECfp_rate2006 = 39.7

CPU2006 license: 55

Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date: Oct-2007

Hardware Availability: Dec-2006

Software Availability: Nov-2007

Peak Portability Flags (Continued)

465.tonto: -DSPEC_CPU_LP64

481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

433.milc: -prof-gen(pass 1) -prof-use(pass 2) -fast -fno-alias
-auto-ilp32

470.lbm: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2
-scalar-rep -prefetch -opt-malloc-options=3

482.sphinx3: -fast -unroll2

C++ benchmarks:

444.namd: -prof-gen(pass 1) -prof-use(pass 2) -fast -fno-alias
-auto-ilp32

447.dealII: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2
-ansi-alias -scalar-rep-

450.soplex: -prof-gen(pass 1) -prof-use(pass 2) -fast
-opt-malloc-options=3

453.povray: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll4
-ansi-alias

Fortran benchmarks:

410.bwaves: -fast -prefetch

416.gamess: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2 -O0
-ansi-alias -scalar-rep-

434.zeusmp: -prof-gen(pass 1) -prof-use(pass 2) -fast

437.leslie3d: -prof-gen(pass 1) -prof-use(pass 2) -fast -prefetch
-opt-malloc-options=3

459.GemsFDTD: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2 -O0
-prefetch

465.tonto: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll4 -auto

Benchmarks using both Fortran and C:

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge 2950 (Intel Xeon 5130, 2.00 GHz)

SPECfp_rate2006 = 39.7

CPU2006 license: 55

Test date: Oct-2007

Test sponsor: Dell Inc.

Hardware Availability: Dec-2006

Tested by: Dell Inc.

Software Availability: Nov-2007

Peak Optimization Flags (Continued)

435.gromacs: -prof-gen(pass 1) -prof-use(pass 2) -fast -prefetch
-auto-ilp32

436.cactusADM: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2
-prefetch -auto-ilp32

454.calculix: -fast -unroll-aggressive -auto-ilp32

481.wrf: -fast -auto-ilp32

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic10.1-FP-intel64-linux-flags.20090714.13.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic10.1-FP-intel64-linux-flags.20090714.13.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.

Report generated on Tue Jul 22 14:25:33 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 27 November 2007.