SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge 2950 III (Intel Xeon E5430, 2.66 GHz)

SPECint®_rate2006 = 124

SPECint_rate_base2006 = 102

CPU2006 license: 55
Test sponsor: Dell Inc.
Tested by: Dell Inc.

Test date: Oct-2007
Hardware Availability: Nov-2007
Software Availability: Nov-2007

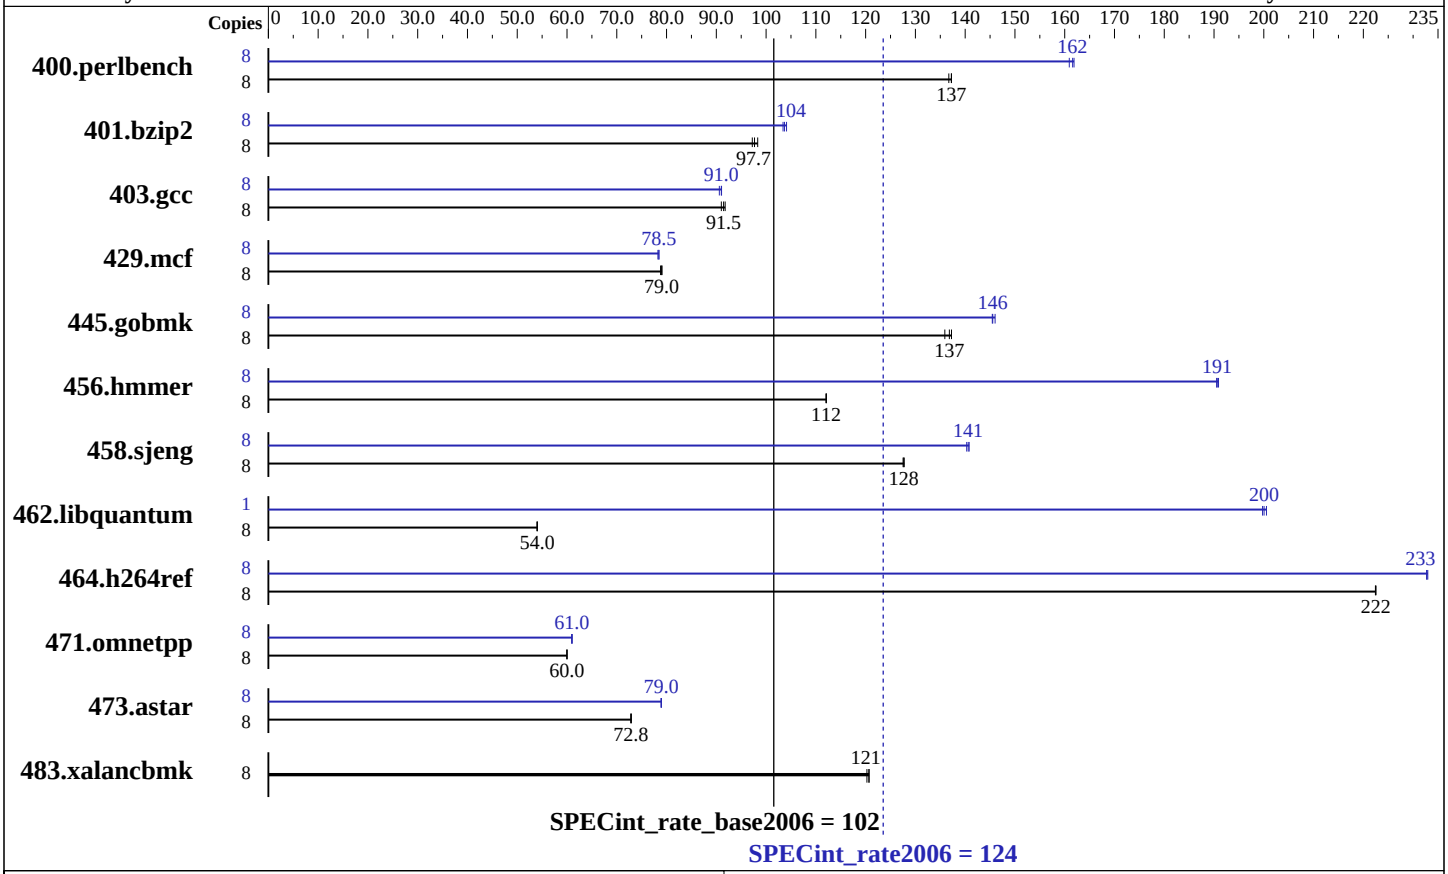

Hardware

CPU Name:	Intel Xeon E5430
CPU Characteristics:	1333 MHz system bus
CPU MHz:	2666
FPU:	Integrated
CPU(s) enabled:	8 cores, 2 chips, 4 cores/chip
CPU(s) orderable:	1,2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	12 MB I+D on chip per chip, 6 MB shared / 2 cores
L3 Cache:	None
Other Cache:	None
Memory:	16 GB (8x2 GB 667 MHz ECC CL5 FB-DIMM)
Disk Subsystem:	1 x 73 GB SAS 15k RPM
Other Hardware:	None

Software

Operating System:	SUSE Linux Enterprise Server 10 (x86_64) SP1, Kernel 2.6.16.46-0.12-smp
Compiler:	Intel C++ Compiler for Linux32 and Linux64 version 10.1 Build 20070725
Auto Parallel:	Yes
File System:	ReiserFS
System State:	Multi-user, run level 3
Base Pointers:	32-bit
Peak Pointers:	32/64-bit
Other Software:	SmartHeap library V8.1

SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge 2950 III (Intel Xeon E5430, 2.66 GHz)

SPECint_rate2006 = 124

SPECint_rate_base2006 = 102

CPU2006 license: 55
Test sponsor: Dell Inc.
Tested by: Dell Inc.

Test date: Oct-2007
Hardware Availability: Nov-2007
Software Availability: Nov-2007

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	8	570	137	572	137	**570**	**137**	8	486	161	483	162	**484**	**162**
401.bzip2	8	794	97.2	785	98.3	**790**	**97.7**	8	747	103	**744**	**104**	742	104
403.gcc	8	708	91.0	**704**	**91.5**	702	91.8	8	711	90.6	**708**	**91.0**	707	91.1
429.mcf	8	922	79.1	926	78.8	**924**	**79.0**	8	930	78.5	**930**	**78.5**	932	78.3
445.gobmk	8	611	137	617	136	**613**	**137**	8	575	146	**577**	**146**	577	145
456.hmmer	8	666	112	**666**	**112**	666	112	8	**392**	**191**	391	191	392	191
458.sjeng	8	**758**	**128**	758	128	759	128	8	690	140	687	141	**688**	**141**
462.libquantum	8	**3068**	**54.0**	3071	54.0	3068	54.0	1	103	201	**104**	**200**	104	200
464.h264ref	8	**796**	**222**	796	222	796	223	8	761	233	760	233	**761**	**233**
471.omnetpp	8	833	60.0	**833**	**60.0**	834	60.0	8	**820**	**61.0**	819	61.0	821	60.9
473.astar	8	770	72.9	**771**	**72.8**	771	72.8	8	712	78.9	711	79.0	**711**	**79.0**
483.xalancbmk	8	**458**	**121**	457	121	459	120	8	**458**	**121**	457	121	459	120

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Invocation Notes

```
OMP_NUM_THREADS set to number of cores
KMP_STACK_SIZE set to 64M
KMP_AFFINITY set to physical,0
```

Operating System Notes

```
'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run
'/usr/bin/taskset' used to bind processes to CPUs
```

Platform Notes

```
BIOS Settings:
Adjacent Cache Line Prefetch = Disabled (default Enabled)
```

Base Compiler Invocation

C benchmarks:

```
icc
```

C++ benchmarks:

```
icpc
```

Base Portability Flags

400.perlbench: `-DSPEC_CPU_LINUX_IA32`
462.libquantum: `-DSPEC_CPU_LINUX`
483.xalancbmk: `-DSPEC_CPU_LINUX`

Base Optimization Flags

C benchmarks:
`-fast -inline-calloc -opt-malloc-options=3`

C++ benchmarks:
`-xT -ipo -O3 -no-prec-div -Wl,-z,muldefs`
`-L/home/cmplr/usr3/alrahate/cpu2006.1.0/lib -lsmartheap`

Base Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

Peak Compiler Invocation

C benchmarks (except as noted below):
`icc`

401.bzip2: `/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux64/bin/icc`
`-L/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux64/lib`
`-I/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux64/include`

456.hmmer: `/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux64/bin/icc`
`-L/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux64/lib`
`-I/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux64/include`

C++ benchmarks:
`icpc`

Peak Portability Flags

400.perlbench: `-DSPEC_CPU_LINUX_IA32`
401.bzip2: `-DSPEC_CPU_LP64`
456.hmmer: `-DSPEC_CPU_LP64`
462.libquantum: `-DSPEC_CPU_LINUX`

Continued on next page

Peak Portability Flags (Continued)

483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -prof-gen(pass 1) -prof-use(pass 2) -fast -ansi-alias -prefetch

401.bzip2: -prof-gen(pass 1) -prof-use(pass 2) -fast -prefetch

403.gcc: -fast -inline-calloc -opt-malloc-options=3

429.mcf: -fast -prefetch

445.gobmk: -prof-gen(pass 1) -prof-use(pass 2) -xT -O2 -ipo -no-prec-div -ansi-alias

456.hmmer: -fast -unroll2 -ansi-alias -opt-multi-version-aggressive

458.sjeng: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll4

462.libquantum: -fast -unroll4 -Ob0 -prefetch -opt-streaming-stores always -vec-guard-write -opt-malloc-options=3 -parallel -par-runtime-control

464.h264ref: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -prof-gen(pass 1) -prof-use(pass 2) -xT -O3 -ipo -no-prec-div -ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs -L/home/cmplr/usr3/alrahate/cpu2006.1.0/lib -lsmartheap

473.astar: -prof-gen(pass 1) -prof-use(pass 2) -xT -O3 -ipo -no-prec-div -ansi-alias -opt-ra-region-strategy=routine -Wl,-z,muldefs -L/home/cmplr/usr3/alrahate/cpu2006.1.0/lib -lsmartheap

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

The flags file that was used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/Intel-ic10-ia32-intel64-linux-flags.20090714.02.html`

You can also download the XML flags source by saving the following link:
`http://www.spec.org/cpu2006/flags/Intel-ic10-ia32-intel64-linux-flags.20090714.02.xml`

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Jul 22 14:21:20 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 27 November 2007.