SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

PRIMERGY RX300 S4, Intel Xeon processor E5430, 2.66 GHz

SPECint®_rate2006 = 101

SPECint_rate_base2006 = 101

CPU2006 license: 22
Test sponsor: Fujitsu Siemens Computers
Tested by: Fujitsu Siemens Computers

Test date: Oct-2007
Hardware Availability: Dec-2007
Software Availability: Nov-2007

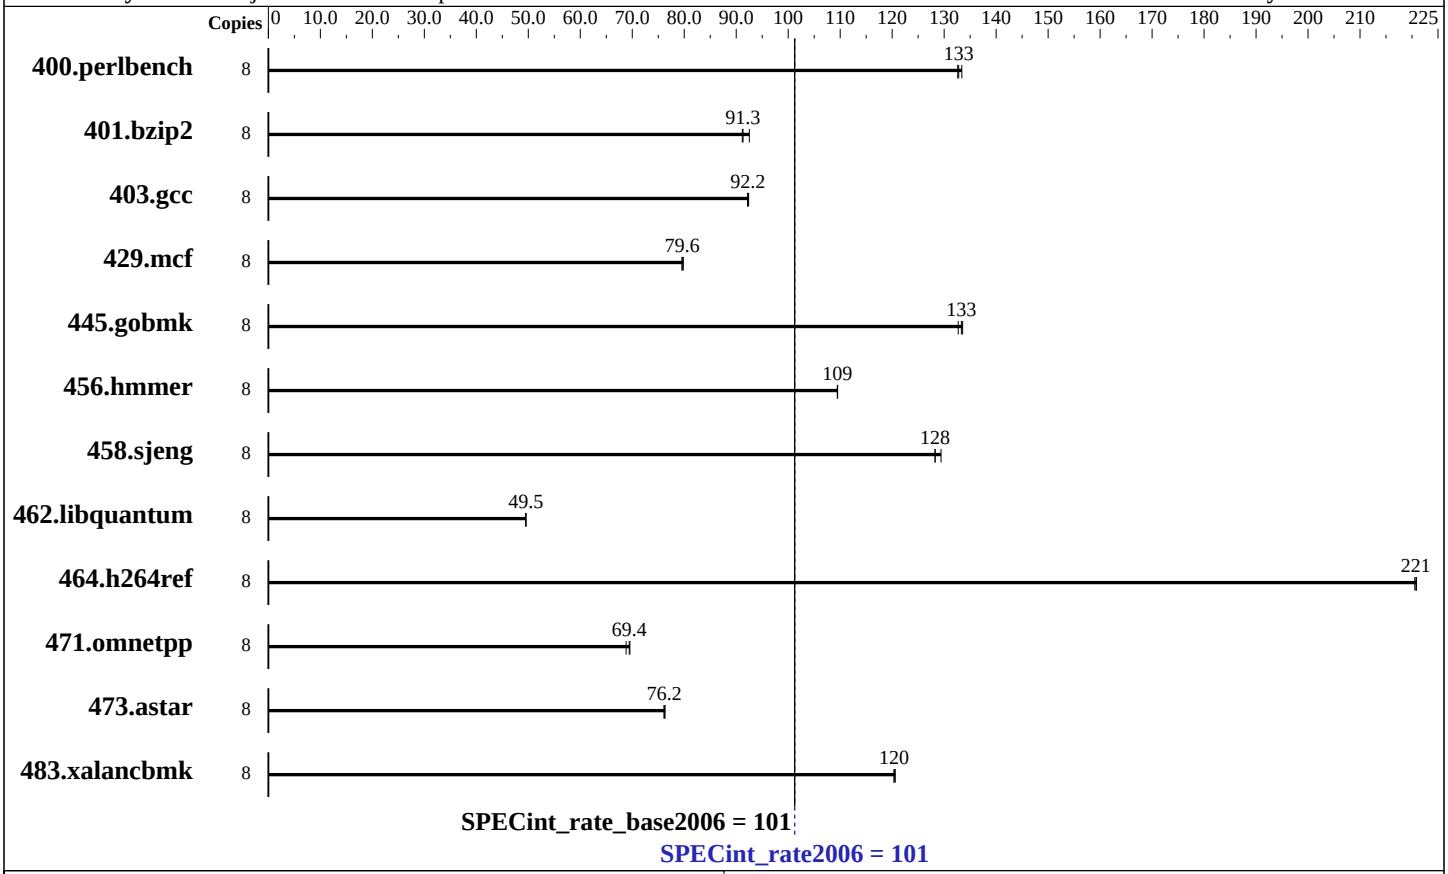

Hardware

CPU Name:	Intel Xeon E5430
CPU Characteristics:	1333 MHz system bus
CPU MHz:	2667
FPU:	Integrated
CPU(s) enabled:	8 cores, 2 chips, 4 cores/chip
CPU(s) orderable:	1,2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	12 MB I+D on chip per chip, 6 MB shared / 2 cores
L3 Cache:	None
Other Cache:	None
Memory:	16 GB (8x2 GB PC2-5300F, 2 rank, CAS 5-5-5, with ECC)
Disk Subsystem:	Seagate ST973451SS (SAS, 73GB, 15000rpm)
Other Hardware:	None

Software

Operating System:	SUSE Linux Enterprise Server 10 (x86_64) SP1, Kernel 2.6.16.46-0.12-smp
Compiler:	Intel C++ Compiler for Linux32 and Linux64 Version 10.1 - Build 20070725
Auto Parallel:	No
File System:	ext2
System State:	Multiuser, Runlevel 3
Base Pointers:	32-bit
Peak Pointers:	32-bit
Other Software:	Smart Heap Library, Version 8.1 binutils-2.17.tar.gz, Version 2.17

SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

PRIMERGY RX300 S4, Intel Xeon processor E5430, 2.66 GHz

SPECint_rate2006 = 101

SPECint_rate_base2006 = 101

CPU2006 license: 22
Test sponsor: Fujitsu Siemens Computers
Tested by: Fujitsu Siemens Computers

Test date: Oct-2007
Hardware Availability: Dec-2007
Software Availability: Nov-2007

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	8	**589**	**133**	589	133	586	133	8	**589**	**133**	589	133	586	133
401.bzip2	8	847	91.2	834	92.5	**845**	**91.3**	8	847	91.2	834	92.5	**845**	**91.3**
403.gcc	8	697	92.4	699	92.2	**698**	**92.2**	8	697	92.4	699	92.2	**698**	**92.2**
429.mcf	8	917	79.6	914	79.8	**916**	**79.6**	8	917	79.6	914	79.8	**916**	**79.6**
445.gobmk	8	**630**	**133**	632	133	628	134	8	**630**	**133**	632	133	628	134
456.hmmer	8	**682**	**109**	682	109	682	110	8	**682**	**109**	682	109	682	110
458.sjeng	8	**755**	**128**	755	128	748	129	8	**755**	**128**	755	128	748	129
462.libquantum	8	**3346**	**49.5**	3347	49.5	3346	49.5	8	**3346**	**49.5**	3347	49.5	3346	49.5
464.h264ref	8	802	221	**802**	**221**	803	221	8	802	221	**802**	**221**	803	221
471.omnetpp	8	719	69.5	727	68.8	**720**	**69.4**	8	719	69.5	727	68.8	**720**	**69.4**
473.astar	8	736	76.3	**737**	**76.2**	738	76.1	8	736	76.3	**737**	**76.2**	738	76.1
483.xalancbmk	8	459	120	458	121	**459**	**120**	8	459	120	458	121	**459**	**120**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

General Notes

```
This result has been produced with binaries provided and compiled by Intel.

BIOS configuration:
Hardware Prefetch = Disable, Adjacent Sector Prefetch = Disable

For information about Fujitsu Siemens Computers please see:
http://www.fujitsu-siemens.com
```

Base Compiler Invocation

C benchmarks:
`icc`

C++ benchmarks:
`icpc`

Base Portability Flags

400.perlbench: `-DSPEC_CPU_LINUX_IA32`
462.libquantum: `-DSPEC_CPU_LINUX`
483.xalancbmk: `-DSPEC_CPU_LINUX`

Base Optimization Flags

C benchmarks:
```
-fast -inline-calloc -opt-malloc-options=3
```

C++ benchmarks:
```
-xT -ipo -O3 -no-prec-div -Wl,-z,muldefs
-L/home/cmplr/usr3/alrahate/cpu2006.1.0/lib -lsmartheap
```

Base Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

Peak Optimization Flags

C benchmarks:

400.perlbench: `basepeak = yes`

401.bzip2: `basepeak = yes`

403.gcc: `basepeak = yes`

429.mcf: `basepeak = yes`

445.gobmk: `basepeak = yes`

456.hmmer: `basepeak = yes`

458.sjeng: `basepeak = yes`

462.libquantum: `basepeak = yes`

464.h264ref: `basepeak = yes`

C++ benchmarks:

471.omnetpp: `basepeak = yes`

473.astar: `basepeak = yes`

483.xalancbmk: `basepeak = yes`

The flags file that was used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Intel-ic10-ia32-intel64-linux-flags.20090713.02.html

You can also download the XML flags source by saving the following link:
http://www.spec.org/cpu2006/flags/Intel-ic10-ia32-intel64-linux-flags.20090713.02.xml

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Jul 22 14:35:16 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 27 November 2007.