SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated

Acer Altos R5250 (AMD Opteron 2220)

SPECint®_rate2006 = 25.3

SPECint_rate_base2006 = 22.7

CPU2006 license: 97
Test sponsor: Acer Incorporated
Tested by: Acer Incorporated

Test date: Jul-2007
Hardware Availability: Dec-2007
Software Availability: Feb-2007

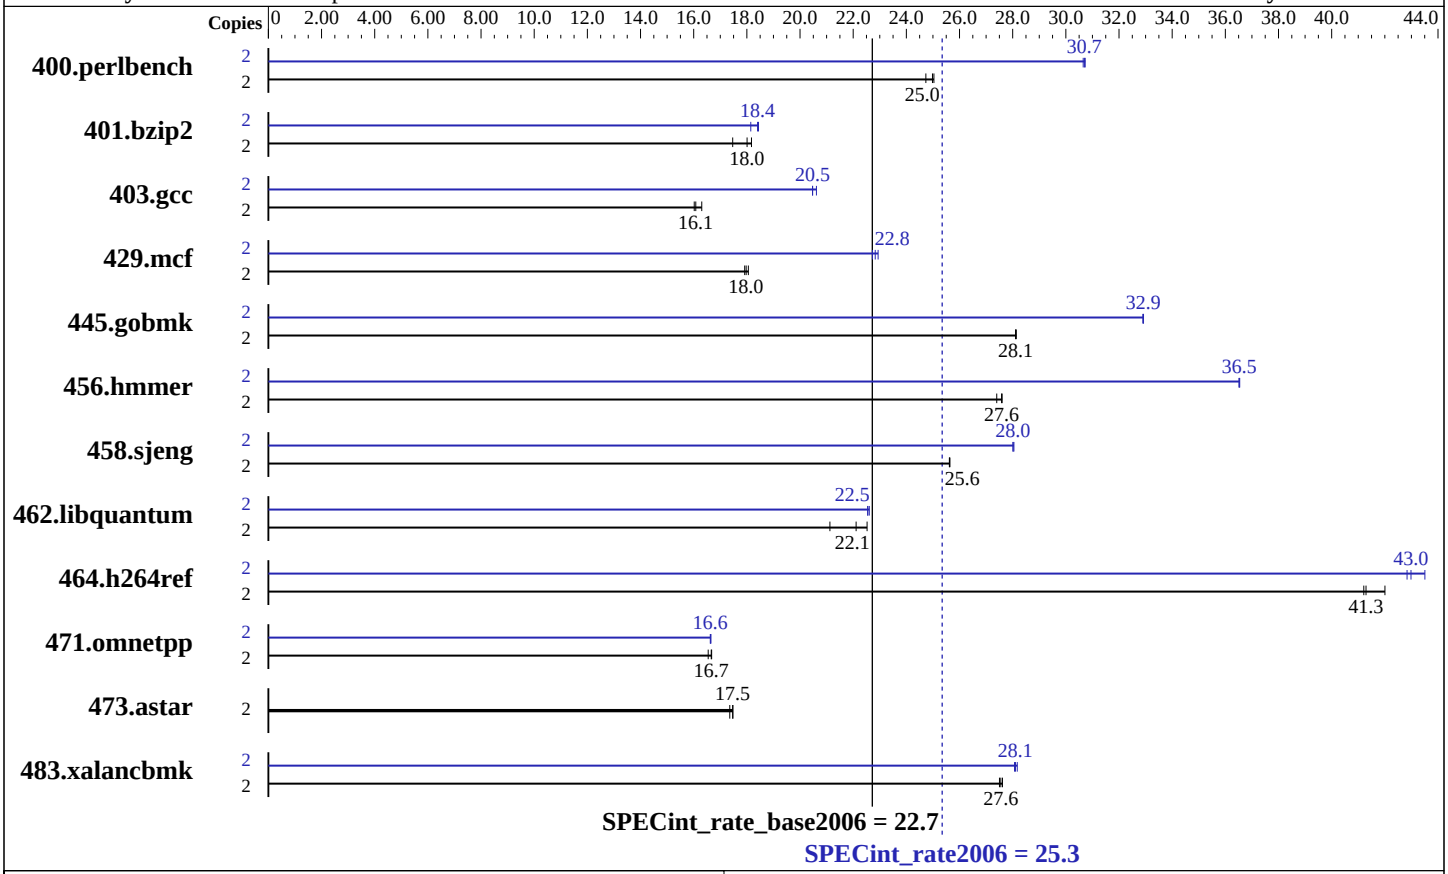

Hardware

CPU Name:	AMD Opteron 2220
CPU Characteristics:	
CPU MHz:	2800
FPU:	Integrated
CPU(s) enabled:	2 cores, 1 chip, 2 cores/chip
CPU(s) orderable:	1,2 chips
Primary Cache:	64 KB I + 64 KB D on chip per core
Secondary Cache:	1 MB I+D on chip per core
L3 Cache:	None
Other Cache:	None
Memory:	8 GB (8x1GB, DDR2-667 CL5 ECC Reg)
Disk Subsystem:	1 x SATA, 160 GB
Other Hardware:	None

Software

Operating System:	SuSE Linux Enterprise Server 10 EM64T kernel
Compiler:	QLogic PathScale Compiler Suite, Release 3.0
Auto Parallel:	No
File System:	ReiserFS
System State:	Default
Base Pointers:	32/64-bit
Peak Pointers:	32/64-bit
Other Software:	SmartHeap 8.0 32 bit Library for Linux

SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated

Acer Altos R5250 (AMD Opteron 2220)

SPECint_rate2006 = 25.3

SPECint_rate_base2006 = 22.7

CPU2006 license: 97
Test sponsor: Acer Incorporated
Tested by: Acer Incorporated

Test date: Jul-2007
Hardware Availability: Dec-2007
Software Availability: Feb-2007

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	2	790	24.7	780	25.0	**782**	**25.0**	2	636	30.7	**636**	**30.7**	637	30.7
401.bzip2	2	1105	17.5	**1072**	**18.0**	1062	18.2	2	1064	18.1	**1049**	**18.4**	1047	18.4
403.gcc	2	1005	16.0	988	16.3	**1001**	**16.1**	2	781	20.6	**786**	**20.5**	786	20.5
429.mcf	2	**1015**	**18.0**	1018	17.9	1010	18.1	2	803	22.7	**799**	**22.8**	795	22.9
445.gobmk	2	746	28.1	746	28.1	**746**	**28.1**	2	637	32.9	**637**	**32.9**	638	32.9
456.hmmer	2	**677**	**27.6**	676	27.6	681	27.4	2	511	36.5	**511**	**36.5**	511	36.5
458.sjeng	2	945	25.6	**944**	**25.6**	944	25.6	2	**864**	**28.0**	864	28.0	863	28.0
462.libquantum	2	1962	21.1	**1874**	**22.1**	1840	22.5	2	1833	22.6	1838	22.5	**1838**	**22.5**
464.h264ref	2	**1072**	**41.3**	1054	42.0	1074	41.2	2	1017	43.5	**1030**	**43.0**	1033	42.8
471.omnetpp	2	755	16.5	750	16.7	**750**	**16.7**	2	**752**	**16.6**	751	16.6	752	16.6
473.astar	2	809	17.4	803	17.5	**804**	**17.5**	2	809	17.4	803	17.5	**804**	**17.5**
483.xalancbmk	2	502	27.5	**501**	**27.6**	500	27.6	2	490	28.2	**491**	**28.1**	492	28.1

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

General Notes

```
taskset utility used to bind cores to processes

This result was measured on the Acer Altos G5450
The Altos G5450 and Altos R5250 are electronically equivalent.
```

Base Compiler Invocation

C benchmarks:
pathcc

C++ benchmarks:
pathCC

Base Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX

Continued on next page

Base Portability Flags (Continued)

464.h264ref: `-DSPEC_CPU_LP64`
483.xalancbmk: `-DSPEC_CPU_LINUX`

Base Optimization Flags

C benchmarks:
`-Ofast -OPT:malloc_alg=1`

C++ benchmarks:
`-Ofast -m32 -L/cpu2006/mpaton/1.0/amd514K8.lib/32 -lsmartheap`

Peak Compiler Invocation

C benchmarks:
`pathcc`

C++ benchmarks:
`pathCC`

Peak Portability Flags

400.perlbench: `-DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64`
401.bzip2: `-DSPEC_CPU_LP64`
445.gobmk: `-DSPEC_CPU_LP64`
456.hmmer: `-DSPEC_CPU_LP64`
458.sjeng: `-DSPEC_CPU_LP64`
462.libquantum: `-DSPEC_CPU_LP64 -DSPEC_CPU_LINUX`
464.h264ref: `-DSPEC_CPU_LP64`
483.xalancbmk: `-DSPEC_CPU_LINUX`

Peak Optimization Flags

C benchmarks:

400.perlbench: `-fb_create fbdata`(pass 1) `-fb_opt fbdata`(pass 2) `-Ofast -LNO:opt=0`

401.bzip2: `-O3 -LNO:ou_prod_max=10 -OPT:Ofast -OPT:alias=disjoint`

403.gcc: `-fb_create fbdata`(pass 1) `-fb_opt fbdata`(pass 2) `-m32 -O3 -OPT:Ofast`

Continued on next page

Peak Optimization Flags (Continued)

429.mcf: `-m32 -O3 -ipa -L/cpu2006/mpaton/1.0/amd514K8.lib/32 -lsmartheap`

445.gobmk: `-fb_create fbdata`(pass 1) `-fb_opt fbdata`(pass 2) `-O3 -OPT:alias=disjoint -LNO:simd=0 -LNO:minvariant=off -WOPT:retype_expr=on`

456.hmmer: `-O2 -OPT:alias=disjoint -OPT:malloc_alg=1 -CG:cflow=0`

458.sjeng: `-fb_create fbdata`(pass 1) `-fb_opt fbdata`(pass 2) `-O3 -IPA:plimit=50000 -IPA:pu_reorder=2`

462.libquantum: `-O3 -ipa -CG:local_fwd_sched=on -IPA:space=1000`

464.h264ref: `-fb_create fbdata`(pass 1) `-fb_opt fbdata`(pass 2) `-O3 -IPA:plimit=20000 -OPT:alias=disjoint -LNO:prefetch=0`

C++ benchmarks:

471.omnetpp: `-Ofast -CG:gcm=off -m32 -L/cpu2006/mpaton/1.0/amd514K8.lib/32 -lsmartheap`

473.astar: `basepeak = yes`

483.xalancbmk: `-Ofast -m32 -OPT:unroll_times_max=8 -L/cpu2006/mpaton/1.0/amd514K8.lib/32 -lsmartheap`

The flags file that was used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/CPU2006_flags.20090714.html`

You can also download the XML flags source by saving the following link:
`http://www.spec.org/cpu2006/flags/CPU2006_flags.20090714.xml`

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Jul 22 13:44:22 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 11 December 2007.