SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

PRIMERGY RX200 S4, Intel Xeon processor E5440, 2.83 GHz

SPECint®_rate2006 = 106

SPECint_rate_base2006 = 106

CPU2006 license: 22
Test sponsor: Fujitsu Siemens Computers
Tested by: Fujitsu Siemens Computers

Test date: Nov-2007
Hardware Availability: Dec-2007
Software Availability: Nov-2007

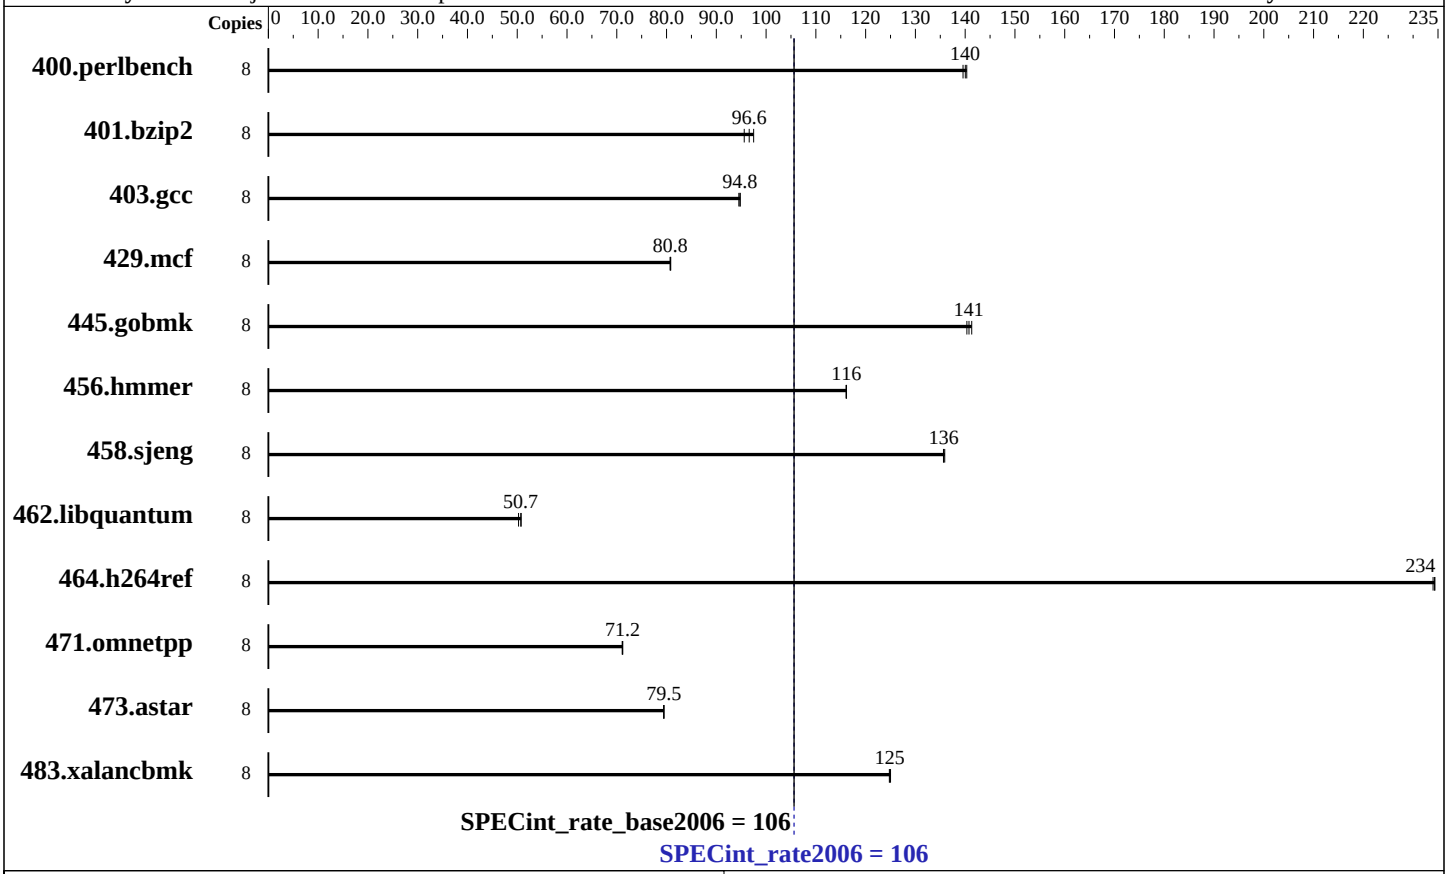

Hardware

CPU Name:	Intel Xeon E5440
CPU Characteristics:	1333 MHz system bus
CPU MHz:	2833
FPU:	Integrated
CPU(s) enabled:	8 cores, 2 chips, 4 cores/chip
CPU(s) orderable:	1,2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	12 MB I+D on chip per chip, 6 MB shared / 2 cores
L3 Cache:	None
Other Cache:	None
Memory:	16 GB (8x2 GB PC2-5300F, 2 rank, CAS 5-5-5, with ECC)
Disk Subsystem:	Seagate ST973451SS (SAS, 73GB, 15000rpm)
Other Hardware:	None

Software

Operating System:	SUSE Linux Enterprise Server 10 (x86_64) SP1, Kernel 2.6.16.46-0.12-smp
Compiler:	Intel C++ Compiler for Linux32 and Linux64 Version 10.1 - Build 20070725
Auto Parallel:	No
File System:	ext2
System State:	Multiuser, Runlevel 3
Base Pointers:	32-bit
Peak Pointers:	32-bit
Other Software:	Smart Heap Library, Version 8.1 binutils-2.17.tar.gz, Version 2.17

SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

PRIMERGY RX200 S4, Intel Xeon processor E5440, 2.83 GHz

SPECint_rate2006 = 106

SPECint_rate_base2006 = 106

CPU2006 license: 22
Test sponsor: Fujitsu Siemens Computers
Tested by: Fujitsu Siemens Computers

Test date: Nov-2007
Hardware Availability: Dec-2007
Software Availability: Nov-2007

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	8	**558**	**140**	560	140	557	140	8	**558**	**140**	560	140	557	140
401.bzip2	8	807	95.6	792	97.5	**799**	**96.6**	8	807	95.6	792	97.5	**799**	**96.6**
403.gcc	8	681	94.5	679	94.8	**680**	**94.8**	8	681	94.5	679	94.8	**680**	**94.8**
429.mcf	8	**903**	**80.8**	904	80.7	902	80.8	8	**903**	**80.8**	904	80.7	902	80.8
445.gobmk	8	**596**	**141**	598	140	594	141	8	**596**	**141**	598	140	594	141
456.hmmer	8	643	116	**643**	**116**	643	116	8	643	116	**643**	**116**	643	116
458.sjeng	8	712	136	714	136	**713**	**136**	8	712	136	714	136	**713**	**136**
462.libquantum	8	3298	50.3	**3268**	**50.7**	3264	50.8	8	3298	50.3	**3268**	**50.7**	3264	50.8
464.h264ref	8	**756**	**234**	755	234	757	234	8	**756**	**234**	755	234	757	234
471.omnetpp	8	**703**	**71.2**	703	71.1	702	71.2	8	**703**	**71.2**	703	71.1	702	71.2
473.astar	8	707	79.5	707	79.4	**707**	**79.5**	8	707	79.5	707	79.4	**707**	**79.5**
483.xalancbmk	8	442	125	**442**	**125**	442	125	8	442	125	**442**	**125**	442	125

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

General Notes

```
This result has been produced with binaries provided and compiled by Intel.

BIOS configuration:
Hardware Prefetch = Disable, Adjacent Sector Prefetch = Disable

For information about Fujitsu Siemens Computers please see:
http://www.fujitsu-siemens.com
```

Base Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
`-fast -inline-calloc -opt-malloc-options=3`

C++ benchmarks:
`-xT -ipo -O3 -no-prec-div -Wl,-z,muldefs`
`-L/home/cmplr/usr3/alrahate/cpu2006.1.0/lib -lsmartheap`

Base Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

Peak Optimization Flags

C benchmarks:

400.perlbench: `basepeak = yes`

401.bzip2: `basepeak = yes`

403.gcc: `basepeak = yes`

429.mcf: `basepeak = yes`

445.gobmk: `basepeak = yes`

456.hmmer: `basepeak = yes`

458.sjeng: `basepeak = yes`

462.libquantum: `basepeak = yes`

464.h264ref: `basepeak = yes`

C++ benchmarks:

471.omnetpp: `basepeak = yes`

473.astar: `basepeak = yes`

483.xalancbmk: `basepeak = yes`

The flags file that was used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Intel-ic10-ia32-intel64-linux-flags.20090714.06.html

You can also download the XML flags source by saving the following link:
http://www.spec.org/cpu2006/flags/Intel-ic10-ia32-intel64-linux-flags.20090714.06.xml

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Jul 22 13:32:14 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 12 December 2007.