SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

CELSIUS R650, Intel Xeon E5410 processor

SPECfp®_rate2006 = 69.4

SPECfp_rate_base2006 = 62.6

CPU2006 license: 22
Test sponsor: Fujitsu Siemens Computers
Tested by: Fujitsu Siemens Computers

Test date: Nov-2007
Hardware Availability: Nov-2007
Software Availability: Nov-2007

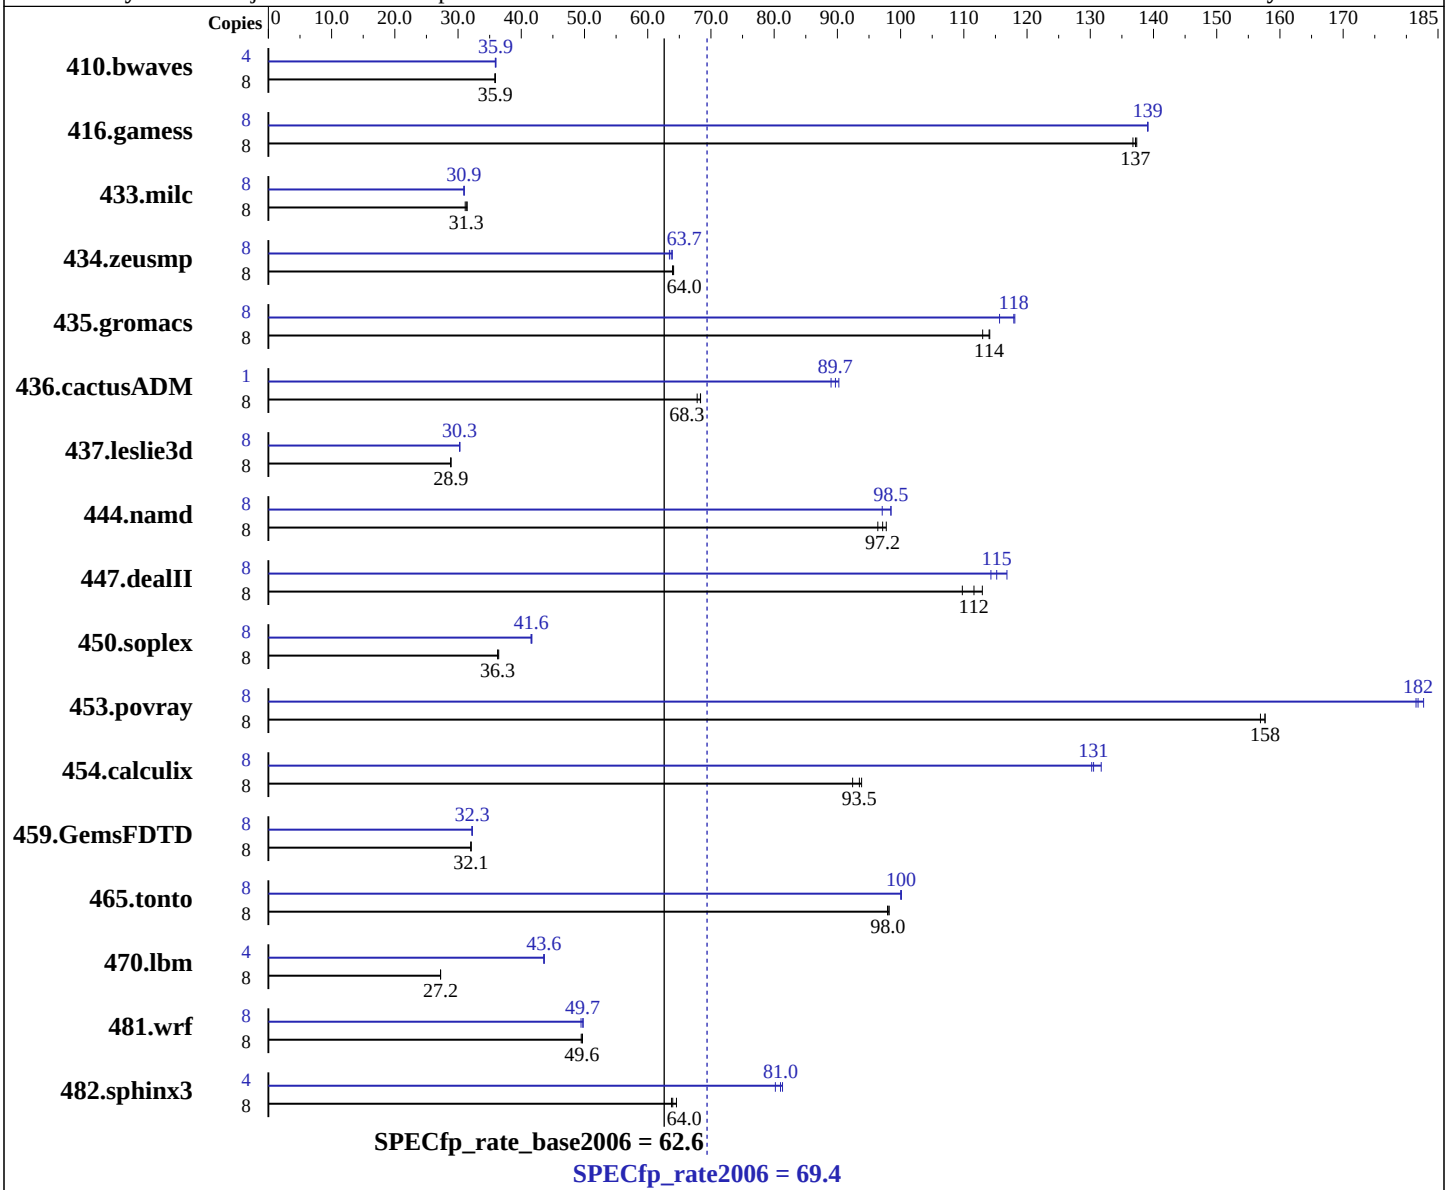

Hardware

CPU Name:	Intel Xeon E5410
CPU Characteristics:	
CPU MHz:	2333
FPU:	Integrated
CPU(s) enabled:	8 cores, 2 chips, 4 cores/chip
CPU(s) orderable:	1,2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	12 MB I+D on chip per chip, 6 MB shared / 2 cores

Continued on next page

Software

Operating System:	SuSE Linux Enterprise Server 10 (x86_64) SP1, kernel 2.6.16.46-0.12-smp
Compiler:	Intel C++ and Fortran Compiler for Linux32 and Linux64 Version 10.1 - Build 20070725
Auto Parallel:	Yes
File System:	ext3
System State:	Multi-User, Run Level 3
Base Pointers:	64-bit

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

CELSIUS R650, Intel Xeon E5410 processor

SPECfp_rate2006 = 69.4

SPECfp_rate_base2006 = 62.6

CPU2006 license: 22
Test sponsor: Fujitsu Siemens Computers
Tested by: Fujitsu Siemens Computers

Test date: Nov-2007
Hardware Availability: Nov-2007
Software Availability: Nov-2007

L3 Cache: None
Other Cache: None
Memory: 8 GB (8x1 GB PC2-5300F, 2 rank, CL5-5-5, ECC)
Disk Subsystem: 1x SATA II, 400 GB, 7200 rpm
Other Hardware: None

Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	8	**3031**	**35.9**	3034	35.8	3028	35.9	4	1514	35.9	**1512**	**35.9**	1510	36.0
416.gamess	8	1140	137	1145	137	**1142**	**137**	8	1126	139	1126	139	**1126**	**139**
433.milc	8	2335	31.5	**2346**	**31.3**	2359	31.1	8	2374	30.9	2371	31.0	**2373**	**30.9**
434.zeusmp	8	1136	64.1	1139	63.9	**1138**	**64.0**	8	1148	63.4	**1142**	**63.7**	1139	63.9
435.gromacs	8	506	113	**501**	**114**	501	114	8	484	118	494	116	**484**	**118**
436.cactusADM	8	1410	67.8	1399	68.4	**1399**	**68.3**	1	**133**	**89.7**	134	89.0	132	90.2
437.leslie3d	8	2607	28.8	**2606**	**28.9**	2604	28.9	8	**2485**	**30.3**	2487	30.2	2483	30.3
444.namd	8	**660**	**97.2**	666	96.4	656	97.7	8	661	97.1	**652**	**98.5**	651	98.5
447.dealII	8	**820**	**112**	810	113	834	110	8	783	117	**794**	**115**	801	114
450.soplex	8	1831	36.4	**1839**	**36.3**	1839	36.3	8	1605	41.6	1601	41.7	**1604**	**41.6**
453.povray	8	271	157	**270**	**158**	270	158	8	**234**	**182**	233	183	234	182
454.calculix	8	703	93.8	714	92.4	**706**	**93.5**	8	507	130	**506**	**131**	501	132
459.GemsFDTD	8	**2648**	**32.1**	2651	32.0	2647	32.1	8	2637	32.2	2632	32.3	**2632**	**32.3**
465.tonto	8	**803**	**98.0**	802	98.2	804	97.9	8	786	100	**786**	**100**	787	100
470.lbm	8	4037	27.2	**4036**	**27.2**	4036	27.2	4	1259	43.6	1261	43.6	**1261**	**43.6**
481.wrf	8	1799	49.7	**1801**	**49.6**	1806	49.5	8	1795	49.8	**1797**	**49.7**	1807	49.5
482.sphinx3	8	2416	64.5	**2438**	**64.0**	2446	63.8	4	972	80.2	**962**	**81.0**	959	81.3

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run

Platform Notes

```
BIOS configuration:
Enhanced Speedstep Technology = Disable
Hardware Prefetch = Disable, Adjacent Sector Prefetch = Disable
SnoopFilter = Enable
```

General Notes

```
All binaries were built with 64-bit Intel compiler except:
437.leslie3d, 450.soplex, 470.lbm and 482.sphinx3 in peak were built with
32-bit Intel compiler by changing the path for include and library files.


For information about Fujitsu Siemens Computers in your country please see:
http://www.fujitsu-siemens.com/countries
```

Base Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc

Fortran benchmarks:
ifort

Benchmarks using both Fortran and C:
icc ifort

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
`-fast`

C++ benchmarks:
`-fast`

Fortran benchmarks:
`-fast`

Benchmarks using both Fortran and C:
`-fast`

Peak Compiler Invocation

C benchmarks (except as noted below):
`/opt/intel/cc/10.1.008/bin/icc -L/opt/intel/cc/10.1.008/lib -I/opt/intel/cc/10.1.008/include`

433.milc: `icc`

C++ benchmarks (except as noted below):
`icpc`

450.soplex: `/opt/intel/cc/10.1.008/bin/icpc -L/opt/intel/cc/10.1.008/lib -I/opt/intel/cc/10.1.008/include`

Fortran benchmarks (except as noted below):
`ifort`

437.leslie3d: `/opt/intel/fc/10.1.008/bin/ifort -L/opt/intel/fc/10.1.008/lib -I/opt/intel/fc/10.1.008/include`

Benchmarks using both Fortran and C:
`icc ifort`

Peak Portability Flags

410.bwaves: `-DSPEC_CPU_LP64`
416.gamess: `-DSPEC_CPU_LP64`
433.milc: `-DSPEC_CPU_LP64`
434.zeusmp: `-DSPEC_CPU_LP64`
435.gromacs: `-DSPEC_CPU_LP64 -nofor_main`
436.cactusADM: `-DSPEC_CPU_LP64 -nofor_main`
444.namd: `-DSPEC_CPU_LP64`
447.dealII: `-DSPEC_CPU_LP64`

Continued on next page

Peak Portability Flags (Continued)

453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

433.milc: -prof-gen(pass 1) -prof-use(pass 2) -fast -fno-alias -auto-ilp32

470.lbm: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2 -scalar-rep- -prefetch -opt-malloc-options=3

482.sphinx3: -fast -unroll2

C++ benchmarks:

444.namd: -prof-gen(pass 1) -prof-use(pass 2) -fast -fno-alias -auto-ilp32

447.dealII: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2 -ansi-alias -scalar-rep-

450.soplex: -prof-gen(pass 1) -prof-use(pass 2) -fast -opt-malloc-options=3

453.povray: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: -fast -prefetch

416.gamess: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2 -Ob0 -ansi-alias -scalar-rep-

434.zeusmp: -prof-gen(pass 1) -prof-use(pass 2) -fast

437.leslie3d: -prof-gen(pass 1) -prof-use(pass 2) -fast -prefetch -opt-malloc-options=3

459.GemsFDTD: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2 -Ob0 -prefetch

Continued on next page

Peak Optimization Flags (Continued)

465.tonto: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -unroll4 -auto`

Benchmarks using both Fortran and C:

435.gromacs: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -prefetch -auto-ilp32`

436.cactusADM: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -unroll2 -prefetch -parallel -auto-ilp32`

454.calculix: `-fast -unroll-aggressive -auto-ilp32`

481.wrf: `-fast -auto-ilp32`

The flags file that was used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/flags-ic101-linux-intel64.20090714.02.html`

You can also download the XML flags source by saving the following link:
`http://www.spec.org/cpu2006/flags/flags-ic101-linux-intel64.20090714.02.xml`

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Jul 22 15:03:42 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 26 December 2007.