



SPEC[®] CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

PRIMERGY RX200 S4, Intel Xeon processor L5335,
2.0 GHz

SPECfp[®]_rate2006 = 58.4

SPECfp_rate_base2006 = 54.1

CPU2006 license: 22


Test sponsor: Fujitsu Siemens Computers

Tested by: Fujitsu Siemens Computers

Test date: Dec-2007

Hardware Availability: Sep-2007

Software Availability: Nov-2007

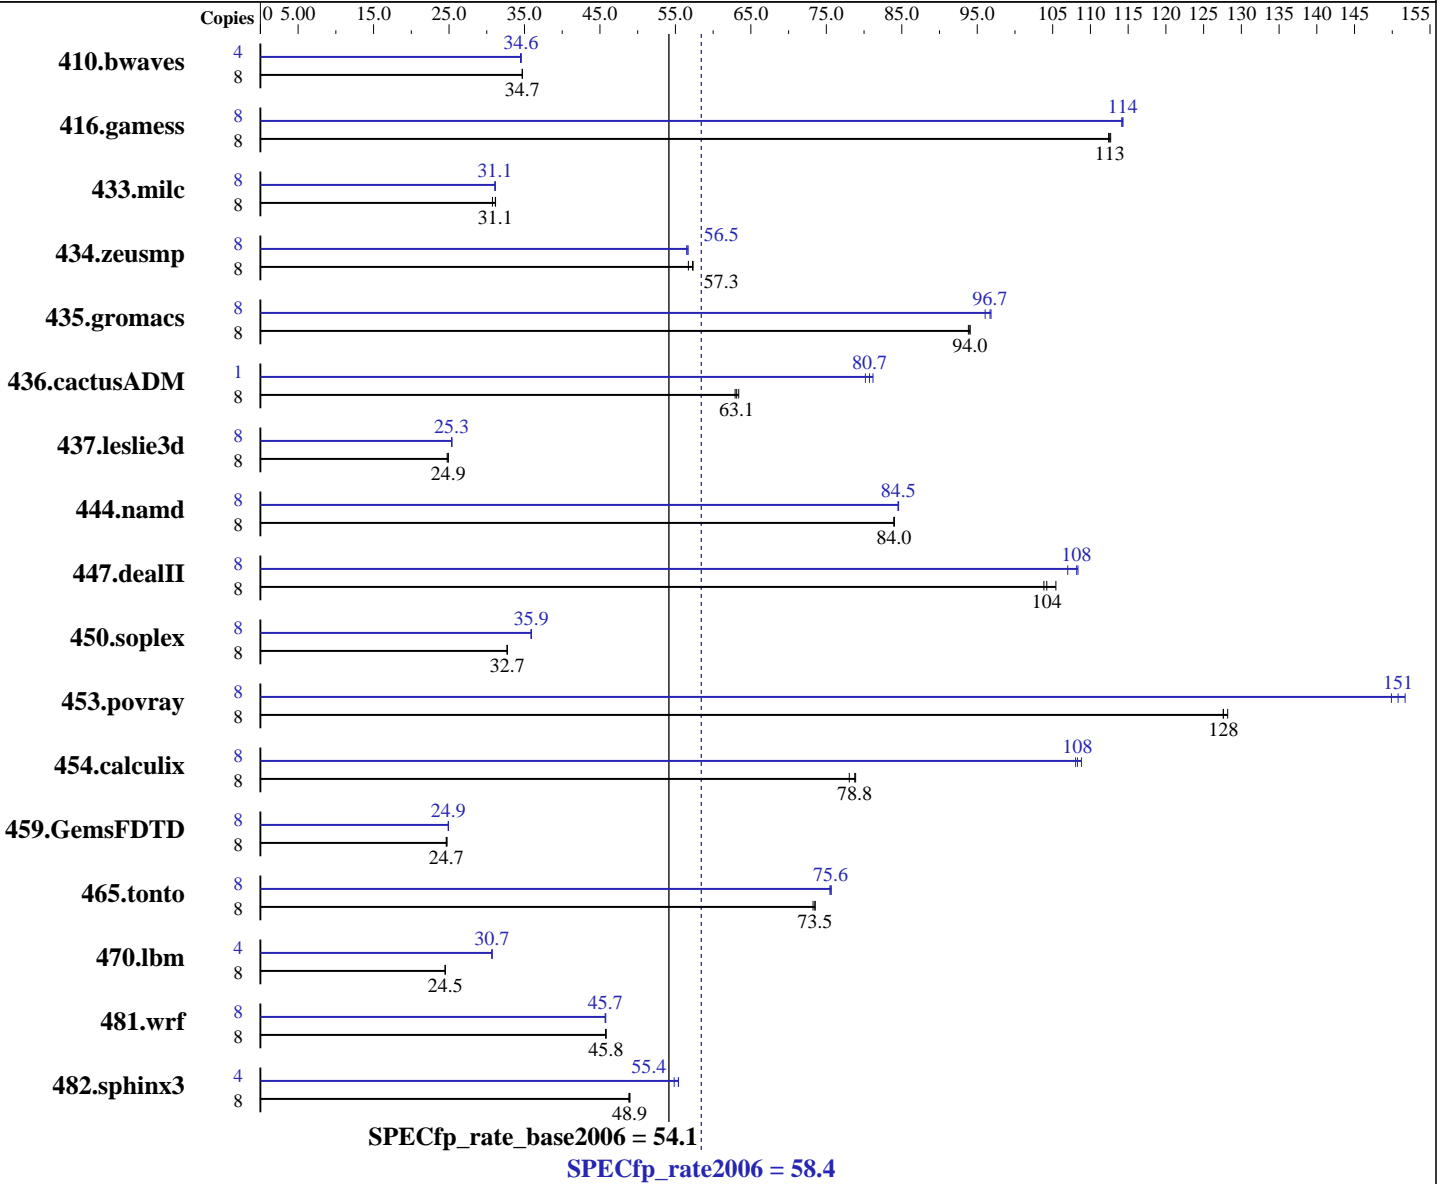

Hardware

CPU Name: Intel Xeon L5335
 CPU Characteristics: 1333 MHz system bus
 CPU MHz: 2000
 FPU: Integrated
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 8 MB I+D on chip per chip, 4 MB shared / 2 cores

Continued on next page

Software

Operating System: SUSE Linux Enterprise Server 10 (x86_64) SP1,
 Kernel 2.6.16.46-0.12-smp
 Compiler: Intel C++ and Fortran Compiler
 for Linux32 and Linux64
 Version 10.1 - Build 20070725
 Auto Parallel: Yes
 File System: ext2
 System State: Multiuser, Runlevel 3
 Base Pointers: 64-bit

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

SPECfp_rate2006 = **58.4**

PRIMERGY RX200 S4, Intel Xeon processor L5335, 2.0 GHz

SPECfp_rate_base2006 = 54.1

CPU2006 license: 22

Test date: Dec-2007

Test sponsor: Fujitsu Siemens Computers

Hardware Availability: Sep-2007

Tested by: Fujitsu Siemens Computers

Software Availability: Nov-2007

L3 Cache: None
Other Cache: None
Memory: 16 GB (8x2 GB PC2-5300F, 2 rank, CAS 5-5-5, with ECC)
Disk Subsystem: Seagate ST973451SS (SAS, 73GB, 15000rpm)
Other Hardware: None

Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio		
410.bwaves	8	3132	34.7	3131	34.7	3131	34.7	4	1573	34.6	1573	34.6	1577	34.5		
416.gamess	8	1390	113	1393	112	1392	113	8	1371	114	1371	114	1372	114		
433.milc	8	2388	30.8	2359	31.1	2356	31.2	8	2360	31.1	2363	31.1	2360	31.1		
434.zeusmp	8	1270	57.3	1271	57.3	1284	56.7	8	1284	56.7	1288	56.5	1288	56.5		
435.gromacs	8	609	93.8	607	94.0	607	94.0	8	591	96.7	595	96.0	590	96.8		
436.cactusADM	8	1520	62.9	1508	63.4	1515	63.1	1	147	81.2	149	80.2	148	80.7		
437.leslie3d	8	3021	24.9	3038	24.8	3021	24.9	8	2967	25.3	2969	25.3	2962	25.4		
444.namd	8	763	84.0	764	84.0	764	84.0	8	759	84.5	759	84.6	759	84.5		
447.dealII	8	868	105	878	104	881	104	8	846	108	845	108	855	107		
450.soplex	8	2038	32.7	2042	32.7	2038	32.7	8	1858	35.9	1860	35.9	1859	35.9		
453.povray	8	333	128	332	128	334	128	8	282	151	284	150	281	152		
454.calculix	8	846	78.0	837	78.9	838	78.8	8	611	108	607	109	610	108		
459.GemsFDTD	8	3431	24.7	3447	24.6	3442	24.7	8	3406	24.9	3406	24.9	3409	24.9		
465.tonto	8	1075	73.2	1071	73.5	1071	73.5	8	1041	75.7	1043	75.5	1041	75.6		
470.lbm	8	4487	24.5	4487	24.5	4486	24.5	4	1790	30.7	1791	30.7	1791	30.7		
481.wrf	8	1950	45.8	1951	45.8	1954	45.7	8	1955	45.7	1952	45.8	1955	45.7		
482.sphinx3	8	3193	48.8	3184	49.0	3186	48.9	4	1407	55.4	1422	54.8	1407	55.4		

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run

General Notes

This result has been produced with binaries provided and compiled by Intel.

All binaries were built with 64-bit Intel compiler except:
437.leslie3d, 450.soplex, 470.lbm and 482.sphinx3 in peak were built with 32-bit Intel compiler by changing the path for include and library files.

BIOS configuration:
Hardware Prefetch = Disable, Adjacent Sector Prefetch = Disable

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

PRIMERGY RX200 S4, Intel Xeon processor L5335,
2.0 GHz

SPECfp_rate2006 = 58.4

SPECfp_rate_base2006 = 54.1

CPU2006 license: 22

Test sponsor: Fujitsu Siemens Computers

Tested by: Fujitsu Siemens Computers

Test date: Dec-2007

Hardware Availability: Sep-2007

Software Availability: Nov-2007

General Notes (Continued)

For information about Fujitsu Siemens Computers please see:
<http://www.fujitsu-siemens.com>

Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

icc ifort

Base Portability Flags

```

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

Base Optimization Flags

C benchmarks:

-fast

C++ benchmarks:

-fast

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

PRIMERGY RX200 S4, Intel Xeon processor L5335,
2.0 GHz

SPECfp_rate2006 = 58.4

SPECfp_rate_base2006 = 54.1

CPU2006 license: 22

Test sponsor: Fujitsu Siemens Computers

Tested by: Fujitsu Siemens Computers

Test date: Dec-2007

Hardware Availability: Sep-2007

Software Availability: Nov-2007

Base Optimization Flags (Continued)

Fortran benchmarks:

-fast

Benchmarks using both Fortran and C:

-fast

Peak Compiler Invocation

C benchmarks (except as noted below):

```
/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux32/bin/icc
-L/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux32/lib
-I/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux32/include
```

433.milc: icc

C++ benchmarks (except as noted below):

icpc

```
450.soplex: /home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux32/bin/icpc
-L/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux32/lib
-I/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux32/include
```

Fortran benchmarks (except as noted below):

ifort

```
437.leslie3d: /home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux32/bin/ifort
-L/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux32/lib
-I/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux32/include
```

Benchmarks using both Fortran and C:

icc ifort

Peak Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

PRIMERGY RX200 S4, Intel Xeon processor L5335,
2.0 GHz

SPECfp_rate2006 = 58.4

SPECfp_rate_base2006 = 54.1

CPU2006 license: 22

Test sponsor: Fujitsu Siemens Computers

Tested by: Fujitsu Siemens Computers

Test date: Dec-2007

Hardware Availability: Sep-2007

Software Availability: Nov-2007

Peak Portability Flags (Continued)

465.tonto: -DSPEC_CPU_LP64

481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

433.milc: -prof-gen(pass 1) -prof-use(pass 2) -fast -fno-alias
-auto-ilp32

470.lbm: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2
-scalar-rep- -prefetch -opt-malloc-options=3

482.sphinx3: -fast -unroll2

C++ benchmarks:

444.namd: -prof-gen(pass 1) -prof-use(pass 2) -fast -fno-alias
-auto-ilp32

447.dealII: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2
-ansi-alias -scalar-rep-

450.soplex: -prof-gen(pass 1) -prof-use(pass 2) -fast
-opt-malloc-options=3

453.povray: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll4
-ansi-alias

Fortran benchmarks:

410.bwaves: -fast -prefetch

416.gamess: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2 -Ob0
-ansi-alias -scalar-rep-

434.zeusmp: -prof-gen(pass 1) -prof-use(pass 2) -fast

437.leslie3d: -prof-gen(pass 1) -prof-use(pass 2) -fast -prefetch
-opt-malloc-options=3

459.GemsFDTD: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2 -Ob0
-prefetch

465.tonto: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll4 -auto

Benchmarks using both Fortran and C:

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

PRIMERGY RX200 S4, Intel Xeon processor L5335,
2.0 GHz

SPECfp_rate2006 = 58.4

SPECfp_rate_base2006 = 54.1

CPU2006 license: 22

Test sponsor: Fujitsu Siemens Computers

Tested by: Fujitsu Siemens Computers

Test date: Dec-2007

Hardware Availability: Sep-2007

Software Availability: Nov-2007

Peak Optimization Flags (Continued)

435.gromacs: -prof-gen(pass 1) -prof-use(pass 2) -fast -prefetch
-auto-ilp32

436.cactusADM: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2
-prefetch -parallel -auto-ilp32

454.calculix: -fast -unroll-aggressive -auto-ilp32

481.wrf: -fast -auto-ilp32

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic10.1-FP-intel64-linux-flags.20090714.05.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic10.1-FP-intel64-linux-flags.20090714.05.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Jul 22 13:32:25 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 28 December 2007.