SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

PRIMERGY BX620 S4, Intel Xeon processor L5310, 1.60 GHz

SPECint®_rate2006 = 73.3

SPECint_rate_base2006 = 63.5

CPU2006 license: 22
Test sponsor: Fujitsu Siemens Computers
Tested by: Fujitsu Siemens Computers

Test date: Dec-2007
Hardware Availability: Dec-2007
Software Availability: Nov-2007

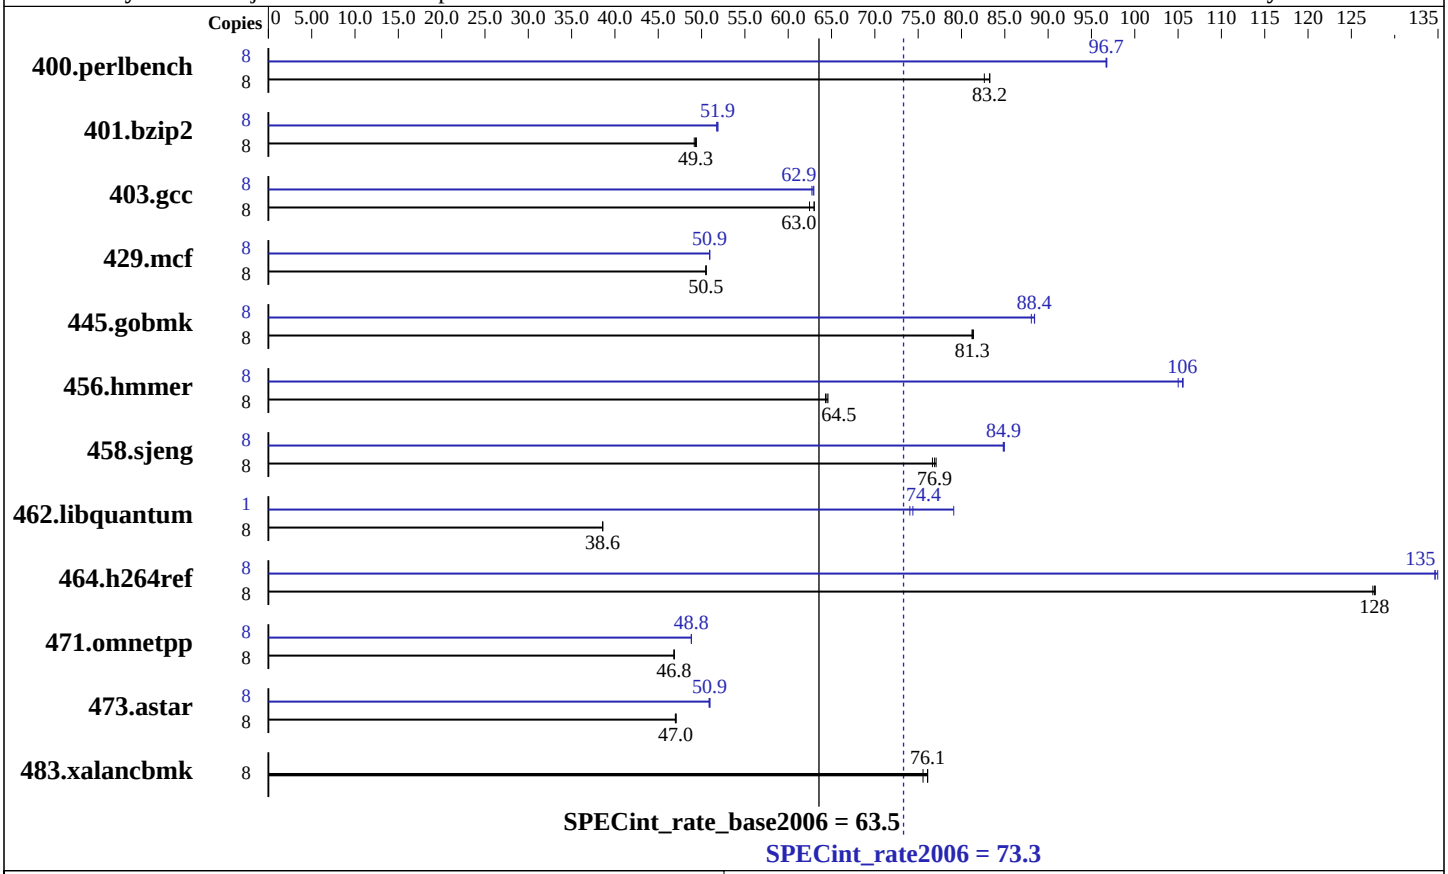

Hardware

CPU Name:	Intel Xeon L5310
CPU Characteristics:	1067 MHz system bus
CPU MHz:	1600
FPU:	Integrated
CPU(s) enabled:	8 cores, 2 chips, 4 cores/chip
CPU(s) orderable:	1,2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	8 MB I+D on chip per chip, 4 MB shared / 2 cores
L3 Cache:	None
Other Cache:	None
Memory:	16 GB (8x2 GB PC2-5300F, 2 rank, CAS 5-5-5, with ECC)
Disk Subsystem:	Seagate ST973451SS (SAS, 73GB, 15000rpm)
Other Hardware:	None

Software

Operating System:	SUSE Linux Enterprise Server 10 (x86_64) SP1, Kernel 2.6.16.46-0.12-smp
Compiler:	Intel C++ Compiler for Linux32 and Linux64 Version 10.1 - Build 20070725
Auto Parallel:	Yes
File System:	ext2
System State:	Multiuser, Runlevel 3
Base Pointers:	32-bit
Peak Pointers:	32/64-bit
Other Software:	Smart Heap Library, Version 8.1 binutils-2.17.tar.gz, Version 2.17

SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

PRIMERGY BX620 S4, Intel Xeon processor L5310, 1.60 GHz

SPECint_rate2006 = 73.3

SPECint_rate_base2006 = 63.5

CPU2006 license: 22
Test sponsor: Fujitsu Siemens Computers
Tested by: Fujitsu Siemens Computers

Test date: Dec-2007
Hardware Availability: Dec-2007
Software Availability: Nov-2007

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	8	939	83.3	**939**	**83.2**	946	82.6	8	**808**	**96.7**	808	96.8	808	96.7
401.bzip2	8	1563	49.4	**1566**	**49.3**	1570	49.2	8	1488	51.9	**1489**	**51.9**	1492	51.7
403.gcc	8	1031	62.5	**1022**	**63.0**	1022	63.0	8	1027	62.7	**1024**	**62.9**	1023	63.0
429.mcf	8	**1445**	**50.5**	1445	50.5	1443	50.5	8	1432	51.0	**1433**	**50.9**	1433	50.9
445.gobmk	8	**1033**	**81.3**	1033	81.2	1031	81.4	8	949	88.4	953	88.1	**949**	**88.4**
456.hmmer	8	**1158**	**64.5**	1156	64.6	1161	64.3	8	707	106	711	105	**707**	**106**
458.sjeng	8	1263	76.6	**1259**	**76.9**	1256	77.1	8	1141	84.8	1140	84.9	**1140**	**84.9**
462.libquantum	8	4295	38.6	4297	38.6	**4296**	**38.6**	1	280	74.0	262	79.1	**279**	**74.4**
464.h264ref	8	1386	128	1389	127	**1387**	**128**	8	1312	135	1315	135	**1315**	**135**
471.omnetpp	8	1068	46.8	1067	46.8	**1068**	**46.8**	8	1024	48.8	**1024**	**48.8**	1024	48.8
473.astar	8	1193	47.1	**1194**	**47.0**	1196	47.0	8	1102	51.0	**1103**	**50.9**	1104	50.9
483.xalancbmk	8	731	75.6	**726**	**76.1**	725	76.1	8	731	75.6	**726**	**76.1**	725	76.1

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

General Notes

```
This result has been produced with binaries provided and compiled by Intel.

All binaries were built with 32-bit Intel compiler except:
401.bzip2 and 456.hmmer in peak were built with 64-bit Intel
compiler by changing the path for include and library files.

BIOS configuration:
Hardware Prefetch = Disable, Adjacent Sector Prefetch = Disable

For information about Fujitsu Siemens Computers please see:
http://www.fujitsu-siemens.com
```

Base Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
-fast -inline-calloc -opt-malloc-options=3

C++ benchmarks:
-xT -ipo -O3 -no-prec-div -Wl,-z,muldefs
-L/home/cmplr/usr3/alrahate/cpu2006.1.0/lib -lsmartheap

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):
icc

401.bzip2: /home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux64/bin/icc
-L/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux64/lib
-I/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux64/include

456.hmmer: /home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux64/bin/icc
-L/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux64/lib
-I/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux64/include

C++ benchmarks:
icpc

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
401.bzip2: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LINUX

Continued on next page

Peak Portability Flags (Continued)

483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -prof-gen(pass 1) -prof-use(pass 2) -fast -ansi-alias -prefetch

401.bzip2: -prof-gen(pass 1) -prof-use(pass 2) -fast -prefetch

403.gcc: -fast -inline-calloc -opt-malloc-options=3

429.mcf: -fast -prefetch

445.gobmk: -prof-gen(pass 1) -prof-use(pass 2) -xT -O2 -ipo -no-prec-div -ansi-alias

456.hmmer: -fast -unroll2 -ansi-alias -opt-multi-version-aggressive

458.sjeng: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll4

462.libquantum: -fast -unroll4 -Ob0 -prefetch -opt-streaming-stores always -vec-guard-write -opt-malloc-options=3 -parallel -par-runtime-control

464.h264ref: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -prof-gen(pass 1) -prof-use(pass 2) -xT -O3 -ipo -no-prec-div -ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs -L/home/cmplr/usr3/alrahate/cpu2006.1.0/lib -lsmartheap

473.astar: -prof-gen(pass 1) -prof-use(pass 2) -xT -O3 -ipo -no-prec-div -ansi-alias -opt-ra-region-strategy=routine -Wl,-z,muldefs -L/home/cmplr/usr3/alrahate/cpu2006.1.0/lib -lsmartheap

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

The flags file that was used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/Intel-ic10-ia32-intel64-linux-flags.20090714.06.html`

You can also download the XML flags source by saving the following link:
`http://www.spec.org/cpu2006/flags/Intel-ic10-ia32-intel64-linux-flags.20090714.06.xml`

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Jul 22 15:19:49 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 8 January 2008.