SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

ProLiant ML370 G5
(3.33 GHz, Intel Xeon processor X5260)

SPECint®2006 = 27.6

SPECint_base2006 = 23.8

CPU2006 license: 3
Test sponsor: Hewlett-Packard Company
Tested by: Hewlett-Packard Company

Test date: Dec-2007
Hardware Availability: Jan-2008
Software Availability: Nov-2007

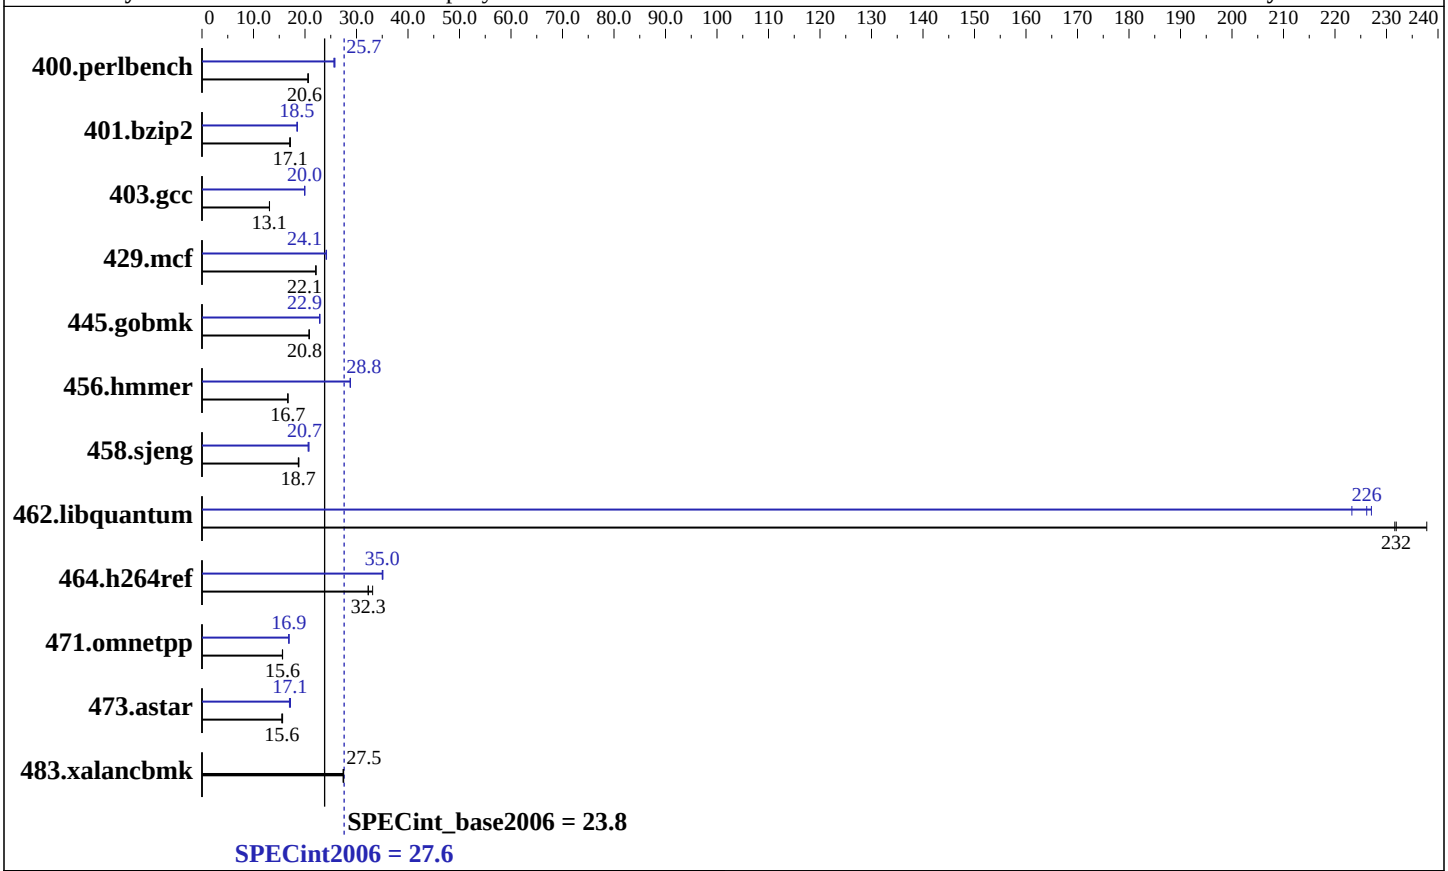

Hardware

CPU Name:	Intel Xeon X5260
CPU Characteristics:	3.33 GHz, 6 MB L2 shared, 1333 MHz system bus
CPU MHz:	3333
FPU:	Integrated
CPU(s) enabled:	4 cores, 2 chips, 2 cores/chip
CPU(s) orderable:	1,2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	6 MB I+D on chip per chip
L3 Cache:	None
Other Cache:	None
Memory:	16 GB (8x2 GB PC2-5300F CL5)
Disk Subsystem:	1x72 GB 15 K SAS
Other Hardware:	None

Software

Operating System:	SUSE Linux Enterprise Server 10 (x86_64) SP1 Kernel 2.6.16.46-0.12-smp
Compiler:	Intel C++ Compiler for applications running on IA-32 and Intel 64, Version 10.1 Build 20070913 Package ID: l_cc_p_10.1.008
Auto Parallel:	Yes
File System:	ext2
System State:	Multi-user run level 3
Base Pointers:	32-bit
Peak Pointers:	32/64-bit
Other Software:	MicroQuill SmartHeap Library 8.1 binutils-2.17.50

SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

ProLiant ML370 G5
(3.33 GHz, Intel Xeon processor X5260)

SPECint2006 = 27.6

SPECint_base2006 = 23.8

CPU2006 license: 3
Test sponsor: Hewlett-Packard Company
Tested by: Hewlett-Packard Company

Test date: Dec-2007
Hardware Availability: Jan-2008
Software Availability: Nov-2007

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	473	20.7	475	20.6	**474**	**20.6**	**380**	**25.7**	381	25.6	378	25.8
401.bzip2	**563**	**17.1**	566	17.0	563	17.1	**522**	**18.5**	523	18.5	521	18.5
403.gcc	615	13.1	**615**	**13.1**	614	13.1	**403**	**20.0**	403	20.0	404	19.9
429.mcf	**412**	**22.1**	413	22.1	412	22.1	**378**	**24.1**	378	24.1	377	24.2
445.gobmk	504	20.8	**504**	**20.8**	504	20.8	**459**	**22.9**	459	22.9	459	22.9
456.hmmer	559	16.7	**560**	**16.7**	560	16.7	324	28.8	324	28.8	**324**	**28.8**
458.sjeng	**646**	**18.7**	647	18.7	643	18.8	583	20.7	**583**	**20.7**	587	20.6
462.libquantum	89.5	232	**89.4**	**232**	87.1	238	92.8	223	**91.6**	**226**	91.2	227
464.h264ref	668	33.1	**685**	**32.3**	686	32.3	**632**	**35.0**	630	35.1	632	35.0
471.omnetpp	**400**	**15.6**	399	15.7	400	15.6	**370**	**16.9**	370	16.9	371	16.8
473.astar	448	15.7	**451**	**15.6**	453	15.5	**411**	**17.1**	409	17.2	413	17.0
483.xalancbmk	252	27.4	251	27.5	**251**	**27.5**	252	27.4	251	27.5	**251**	**27.5**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

```
'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run
OMP_NUM_THREADS set to number of cores
KMP_AFFINITY set to physical,0
KMP_STACKSIZE set to 64M
```

Platform Notes

```
BIOS configuration:
  Power Regulator set to Static High Performance Mode
```

Base Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
462.libquantum: -DSPEC_CPU_LINUX

Continued on next page

Base Portability Flags (Continued)

483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
-fast -vec-guard-write -opt-malloc-options=3 -parallel
-par-runtime-control

C++ benchmarks:
-xT -ipo -O3 -no-prec-div -Wl,-z,muldefs
-L/cpu2006/SmartHeap_8.1/lib -lsmartheap

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):
icc

401.bzip2: /opt/intel/cce/10.1.008/bin/icc
-L/opt/intel/cce/10.1.008/lib
-I/opt/intel/cce/10.1.008/include

456.hmmer: /opt/intel/cce/10.1.008/bin/icc
-L/opt/intel/cce/10.1.008/lib
-I/opt/intel/cce/10.1.008/include

C++ benchmarks:
icpc

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
401.bzip2: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -ansi-alias -prefetch`

401.bzip2: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -prefetch -auto-ilp32`

403.gcc: `-fast -inline-calloc -opt-malloc-options=3`

429.mcf: `-fast -prefetch`

445.gobmk: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-xT -O2 -ipo -no-prec-div -ansi-alias`

456.hmmer: `-fast -unroll2 -ansi-alias -opt-multi-version-aggressive -auto-ilp32`

458.sjeng: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -unroll4`

462.libquantum: `-fast -unroll4 -Ob0 -prefetch -opt-streaming-stores always -vec-guard-write -opt-malloc-options=3 -parallel -par-runtime-control`

464.h264ref: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -unroll2 -ansi-alias`

C++ benchmarks:

471.omnetpp: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-xT -O3 -ipo -no-prec-div -ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs -L/cpu2006/SmartHeap_8.1/lib -lsmartheap`

473.astar: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-xT -O3 -ipo -no-prec-div -ansi-alias -opt-ra-region-strategy=routine -Wl,-z,muldefs -L/cpu2006/SmartHeap_8.1/lib -lsmartheap`

483.xalancbmk: `basepeak = yes`

Peak Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

The flags file that was used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/HP-Intel-ic10.1-linux-int-flags.20090713.html

You can also download the XML flags source by saving the following link:
http://www.spec.org/cpu2006/flags/HP-Intel-ic10.1-linux-int-flags.20090713.xml

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Jul 22 16:10:15 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 23 January 2008.