SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge 1950 III (Intel Xeon E5420, 2.50 GHz)

SPECint®_rate2006 = 112

SPECint_rate_base2006 = 98.0

CPU2006 license: 55
Test sponsor: Dell Inc.
Tested by: Dell Inc.

Test date: Dec-2007
Hardware Availability: Nov-2007
Software Availability: Nov-2007

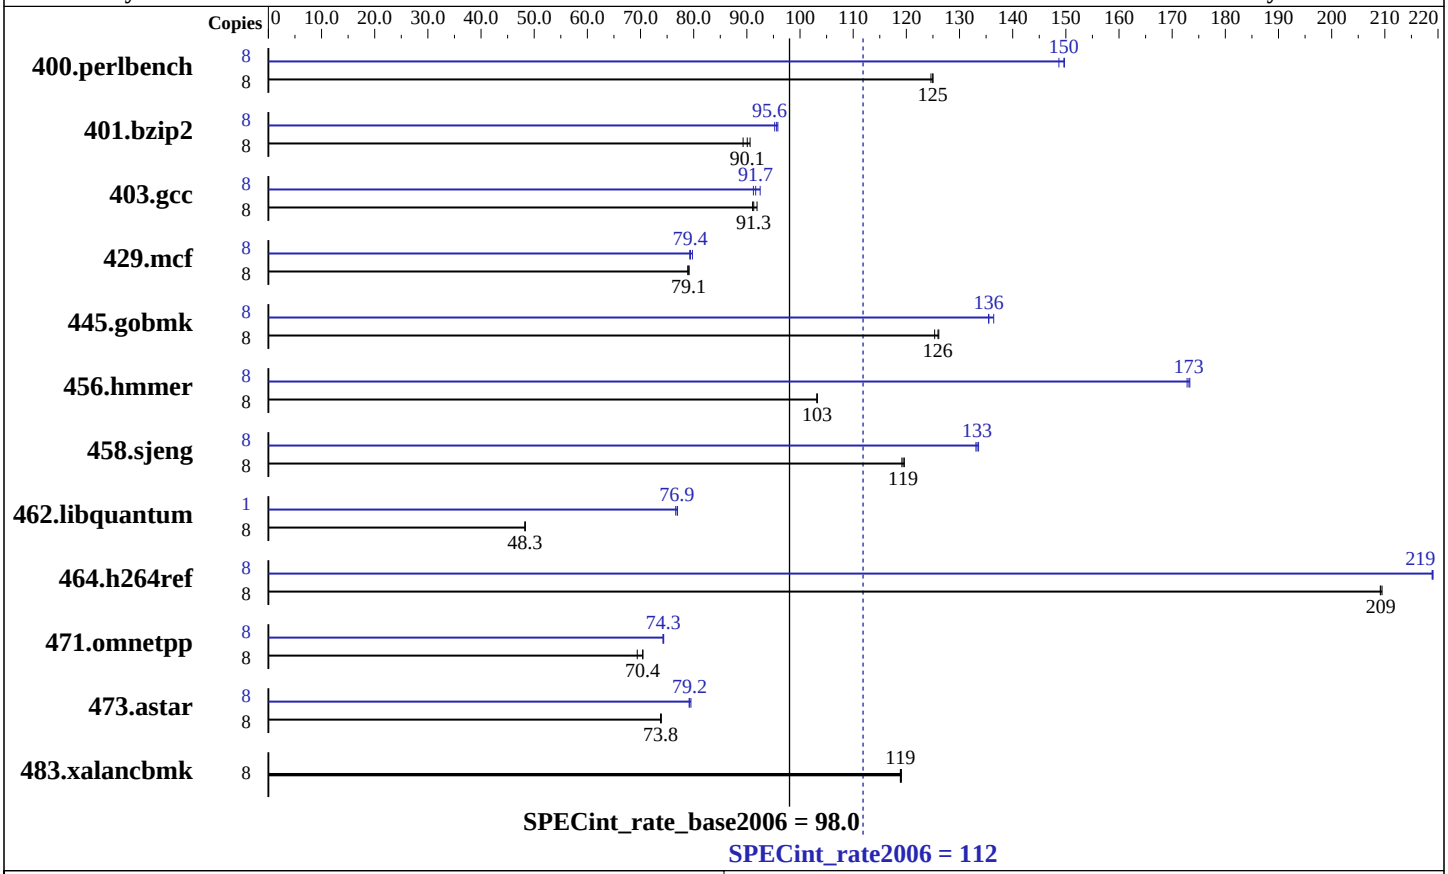

Hardware

CPU Name:	Intel Xeon E5420
CPU Characteristics:	1333 MHz system bus
CPU MHz:	2500
FPU:	Integrated
CPU(s) enabled:	8 cores, 2 chips, 4 cores/chip
CPU(s) orderable:	1,2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	12 MB I+D on chip per chip, 6 MB shared / 2 cores
L3 Cache:	None
Other Cache:	None
Memory:	16 GB (8x2 GB DDR2-667 ECC CL5 FB-DIMM)
Disk Subsystem:	1 x 73 GB SAS 15k RPM
Other Hardware:	None

Software

Operating System:	SUSE Linux Enterprise Server 10 (x86_64) SP1, Kernel 2.6.16.46-0.12-smp
Compiler:	Intel C++ Compiler 10.1 for Linux Build 20070913 Package ID: l_cc_p_10.1.008
Auto Parallel:	Yes
File System:	ReiserFS
System State:	Multi-user, run level 3
Base Pointers:	32-bit
Peak Pointers:	32/64-bit
Other Software:	Microquill SmartHeap V8.1 Binutils 2.17.50.0.15

SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge 1950 III (Intel Xeon E5420, 2.50 GHz)

SPECint_rate2006 = 112

SPECint_rate_base2006 = 98.0

CPU2006 license: 55
Test sponsor: Dell Inc.
Tested by: Dell Inc.

Test date: Dec-2007
Hardware Availability: Nov-2007
Software Availability: Nov-2007

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	8	627	125	625	125	**625**	**125**	8	526	149	522	150	**522**	**150**
401.bzip2	8	865	89.3	852	90.6	**857**	**90.1**	8	811	95.2	806	95.8	**808**	**95.6**
403.gcc	8	**705**	**91.3**	701	91.9	707	91.1	8	**703**	**91.7**	706	91.2	696	92.5
429.mcf	8	925	78.9	922	79.1	**923**	**79.1**	8	921	79.3	**919**	**79.4**	915	79.8
445.gobmk	8	**666**	**126**	670	125	665	126	8	615	136	**619**	**136**	620	135
456.hmmer	8	723	103	**723**	**103**	723	103	8	431	173	**431**	**173**	432	173
458.sjeng	8	809	120	**811**	**119**	812	119	8	725	134	727	133	**726**	**133**
462.libquantum	8	3434	48.3	**3434**	**48.3**	3431	48.3	1	**269**	**76.9**	269	77.0	270	76.6
464.h264ref	8	**846**	**209**	845	209	846	209	8	808	219	**809**	**219**	809	219
471.omnetpp	8	710	70.4	**710**	**70.4**	721	69.4	8	672	74.4	**673**	**74.3**	673	74.2
473.astar	8	**761**	**73.8**	760	73.9	761	73.8	8	**709**	**79.2**	707	79.5	710	79.1
483.xalancbmk	8	464	119	464	119	**464**	**119**	8	464	119	464	119	**464**	**119**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Invocation Notes

```
OMP_NUM_THREADS set to number of cores
KMP_STACK_SIZE set to 64M
KMP_AFFINITY set to physical,0
```

Operating System Notes

```
'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run
'/usr/bin/taskset' used to bind processes to CPUs
```

Platform Notes

```
BIOS Settings:
Adjacent Cache Line Prefetch = Disabled (default Enabled)
Hardware Prefetcher = Disabled (default Enabled)
```

Base Compiler Invocation

C benchmarks:

```
icc
```

C++ benchmarks:

```
icpc
```

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
-fast -inline-calloc -opt-malloc-options=3

C++ benchmarks:
-xT -ipo -O3 -no-prec-div -Wl,-z,muldefs
-L/spec/users/rahul/cpu2006.1.0/lib -lsmartheap

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):
icc

401.bzip2: /opt/intel/cce/10.1.008/bin/icc
-L/opt/intel/cce/10.1.008/lib
-I/opt/intel/cce/10.1.008/include

456.hmmer: /opt/intel/cce/10.1.008/bin/icc
-L/opt/intel/cce/10.1.008/lib
-I/opt/intel/cce/10.1.008/include

C++ benchmarks:
icpc

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
401.bzip2: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LINUX

Continued on next page

Peak Portability Flags (Continued)

483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -prof-gen(pass 1) -prof-use(pass 2) -fast -ansi-alias -prefetch

401.bzip2: -prof-gen(pass 1) -prof-use(pass 2) -fast -prefetch

403.gcc: -fast -inline-calloc -opt-malloc-options=3

429.mcf: -fast -prefetch

445.gobmk: -prof-gen(pass 1) -prof-use(pass 2) -xT -O2 -ipo -no-prec-div -ansi-alias

456.hmmer: -fast -unroll2 -ansi-alias -opt-multi-version-aggressive

458.sjeng: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll4

462.libquantum: -fast -unroll4 -Ob0 -prefetch -opt-streaming-stores always -vec-guard-write -opt-malloc-options=3 -parallel -par-runtime-control

464.h264ref: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -prof-gen(pass 1) -prof-use(pass 2) -xT -O3 -ipo -no-prec-div -ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs -L/spec/users/rahul/cpu2006.1.0/lib -lsmartheap

473.astar: -prof-gen(pass 1) -prof-use(pass 2) -xT -O3 -ipo -no-prec-div -ansi-alias -opt-ra-region-strategy=routine -Wl,-z,muldefs -L/spec/users/rahul/cpu2006.1.0/lib -lsmartheap

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

The flags file that was used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/Intel-ic10-ia32-intel64-linux-flags.20090714.12.html`

You can also download the XML flags source by saving the following link:
`http://www.spec.org/cpu2006/flags/Intel-ic10-ia32-intel64-linux-flags.20090714.12.xml`

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Jul 22 16:24:53 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 6 February 2008.