



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

ProLiant BL480c
(3.16 GHz, Intel Xeon X5460)

SPECint_rate2006 = 138

SPECint_rate_base2006 = 112

CPU2006 license: 3


Test sponsor: Hewlett-Packard Company

Tested by: Hewlett-Packard Company

Test date: Jan-2008

Hardware Availability: Jan-2008

Software Availability: Nov-2007

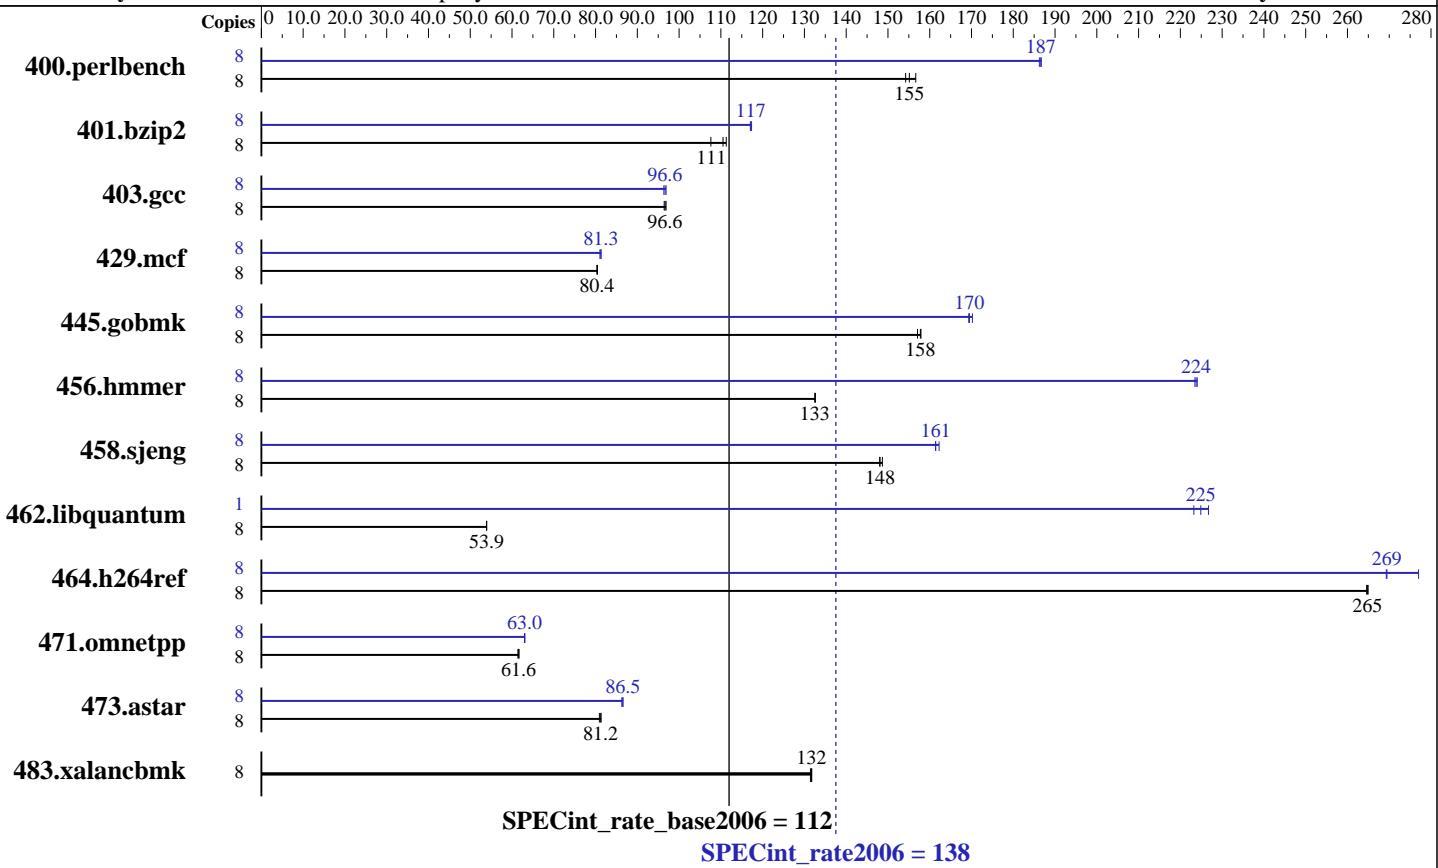

Hardware

CPU Name: Intel Xeon X5460
CPU Characteristics: 3.16 GHz, 2x6 MB L2 shared, 1333 MHz system bus
CPU MHz: 3166
FPU: Integrated
CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip
CPU(s) orderable: 1,2 chips
Primary Cache: 32 KB I + 32 KB D on chip per core
Secondary Cache: 12 MB I+D on chip per chip, 6 MB shared / 2 cores
L3 Cache: None
Other Cache: None
Memory: 16 GB (8x2 GB PC2-5300F CL5)
Disk Subsystem: 1x72 GB 15 K SAS
Other Hardware: None

Software

Operating System: SUSE Linux Enterprise Server 10 (x86_64) SP1
Kernel 2.6.16.46-0.12-smp
Compiler: Intel C++ Compiler for applications running on IA-32 and Intel 64, Version 10.1 Build 20070913 Package ID: l_cc_p_10.1.008
Auto Parallel: Yes
File System: ext2
System State: Multi-user run level 3
Base Pointers: 32-bit
Peak Pointers: 32/64-bit
Other Software: MicroQuill SmartHeap Library 8.1 binutils-2.17.50



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

ProLiant BL480c
(3.16 GHz, Intel Xeon X5460)

SPECint_rate2006 = 138

SPECint_rate_base2006 = 112

CPU2006 license: 3

Test sponsor: Hewlett-Packard Company

Tested by: Hewlett-Packard Company

Test date: Jan-2008

Hardware Availability: Jan-2008

Software Availability: Nov-2007

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	8	499	157	504	155	507	154	8	419	187	419	187	420	186
401.bzip2	8	694	111	717	108	699	111	8	658	117	660	117	659	117
403.gcc	8	668	96.4	665	96.9	666	96.6	8	665	96.9	666	96.6	668	96.4
429.mcf	8	908	80.4	907	80.4	908	80.4	8	897	81.3	898	81.3	900	81.0
445.gobmk	8	532	158	534	157	531	158	8	495	170	493	170	496	169
456.hmmer	8	563	133	563	133	563	133	8	333	224	334	224	334	223
458.sjeng	8	654	148	651	149	654	148	8	600	161	600	161	597	162
462.libquantum	8	3074	53.9	3075	53.9	3075	53.9	1	91.4	227	92.1	225	92.8	223
464.h264ref	8	669	265	668	265	669	265	8	657	269	657	269	639	277
471.omnetpp	8	814	61.4	812	61.6	811	61.7	8	793	63.0	793	63.1	794	63.0
473.astar	8	694	80.9	691	81.2	691	81.3	8	651	86.3	649	86.5	649	86.6
483.xalancbmk	8	419	132	419	132	420	131	8	419	132	419	132	420	131

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run
OMP_NUM_THREADS set to number of cores
KMP_AFFINITY set to physical,0
KMP_STACKSIZE set to 64M

Platform Notes

BIOS configuration:

Power Regulator set to Static High Performance Mode
Adjacent Sector Prefetch Disabled

Base Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

ProLiant BL480c
(3.16 GHz, Intel Xeon X5460)

SPECint_rate2006 = 138

SPECint_rate_base2006 = 112

CPU2006 license: 3

Test sponsor: Hewlett-Packard Company

Tested by: Hewlett-Packard Company

Test date: Jan-2008

Hardware Availability: Jan-2008

Software Availability: Nov-2007

Base Portability Flags (Continued)

462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:

-fast -inline-calloc -opt-malloc-options=3

C++ benchmarks:

-xT -ipo -O3 -no-prec-div -Wl,-z,muldefs
-L/cpu2006.1.0/SmartHeap_8.1/lib -lsmartheap

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):

icc

401.bzip2: /opt/intel/cce/10.1.008/bin/icc
-L/opt/intel/cce/10.1.008/lib
-I/opt/intel/cce/10.1.008/include

456.hmmer: /opt/intel/cce/10.1.008/bin/icc
-L/opt/intel/cce/10.1.008/lib
-I/opt/intel/cce/10.1.008/include

C++ benchmarks:

icpc

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
401.bzip2: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

ProLiant BL480c
(3.16 GHz, Intel Xeon X5460)

SPECint_rate2006 = 138

SPECint_rate_base2006 = 112

CPU2006 license: 3

Test sponsor: Hewlett-Packard Company

Tested by: Hewlett-Packard Company

Test date: Jan-2008

Hardware Availability: Jan-2008

Software Availability: Nov-2007

Peak Optimization Flags

C benchmarks:

```
400.perlbench: -prof-gen(pass 1) -prof-use(pass 2) -fast -ansi-alias
               -prefetch

401.bzip2: -prof-gen(pass 1) -prof-use(pass 2) -fast -prefetch

403.gcc: -fast -inline-calloc -opt-malloc-options=3

429.mcf: -fast -prefetch

445.gobmk: -prof-gen(pass 1) -prof-use(pass 2) -xT -O2 -ipo
            -no-prec-div -ansi-alias

456.hmmer: -fast -unroll2 -ansi-alias -opt-multi-version-aggressive

458.sjeng: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll4

462.libquantum: -fast -unroll4 -O0 -prefetch
                -opt-streaming-stores always -vec-guard-write
                -opt-malloc-options=3 -parallel -par-runtime-control

464.h264ref: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2
              -ansi-alias
```

C++ benchmarks:

```
471.omnetpp: -prof-gen(pass 1) -prof-use(pass 2) -xT -O3 -ipo
              -no-prec-div -ansi-alias -opt-ra-region-strategy=block
              -Wl,-z,muldefs -L/cpu2006.1.0/SmartHeap_8.1/lib -lsmartheap

473.astar: -prof-gen(pass 1) -prof-use(pass 2) -xT -O3 -ipo
            -no-prec-div -ansi-alias -opt-ra-region-strategy=routine
            -Wl,-z,muldefs -L/cpu2006.1.0/SmartHeap_8.1/lib -lsmartheap

483.xalancbmk: basepeak = yes
```

Peak Other Flags

C benchmarks:

```
403.gcc: -Dalloca=_alloca
```

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/HP-Intel-ic10.1-linux-int-flags.20090714.00.html>



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

ProLiant BL480c
(3.16 GHz, Intel Xeon X5460)

SPECint_rate2006 = 138

SPECint_rate_base2006 = 112

CPU2006 license: 3

Test sponsor: Hewlett-Packard Company

Tested by: Hewlett-Packard Company

Test date: Jan-2008

Hardware Availability: Jan-2008

Software Availability: Nov-2007

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/HP-Intel-ic10.1-linux-int-flags.20090714.00.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.

Report generated on Tue Jul 22 16:22:02 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 6 February 2008.