



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

PRIMERGY TX150 S6, Intel Core 2 Duo E4500, 2.20 GHz

SPECint®_rate2006 = 28.0

SPECint_rate_base2006 = 25.0

CPU2006 license: 22


Test sponsor: Fujitsu Siemens Computers

Tested by: Fujitsu Siemens Computers

Test date: Jan-2008

Hardware Availability: Jan-2008

Software Availability: Nov-2007

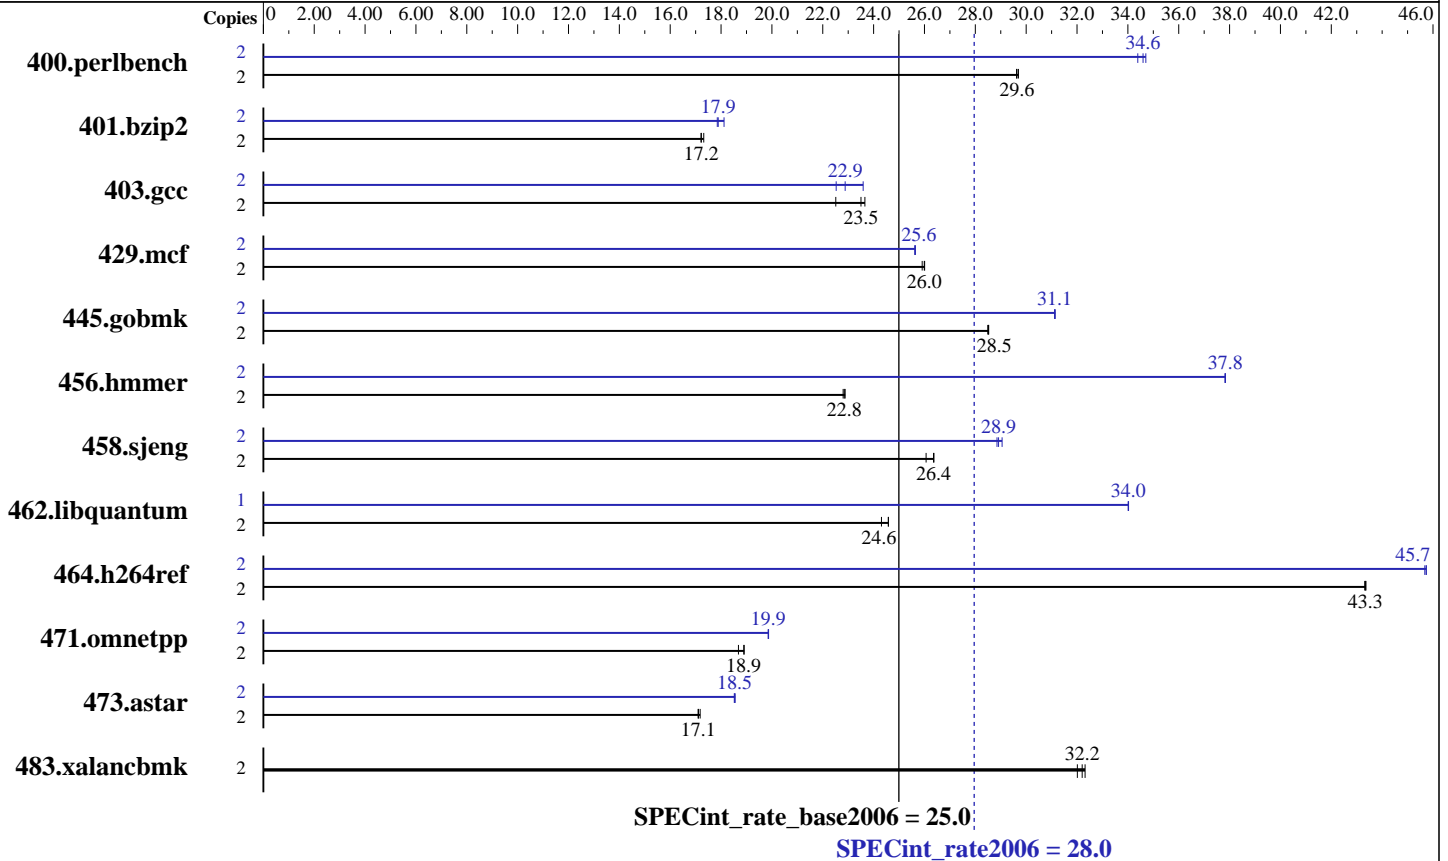

Hardware

CPU Name: Intel Core 2 Duo E4500
 CPU Characteristics: 800 MHz system bus
 CPU MHz: 2200
 FPU: Integrated
 CPU(s) enabled: 2 cores, 1 chip, 2 cores/chip
 CPU(s) orderable: 1 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 2 MB I+D on chip per chip
 L3 Cache: None
 Other Cache: None
 Memory: 4 GB (4x1 GB PC2-6400E, 2 rank, CAS 6-6-6, with ECC)
 Disk Subsystem: Fujitsu MAY2036RC (SAS, 36GB, 10000rpm)
 Other Hardware: None

Software

Operating System: SUSE Linux Enterprise Server 10 (x86_64) SP1, Kernel 2.6.16.46-0.12-smp
 Compiler: Intel C++ Compiler for Linux32 and Linux64 Version 10.1 - Build 20070725
 Auto Parallel: Yes
 File System: ext2
 System State: Multiuser, Runlevel 3
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: MicroQuillSmartHeap Library, Version 8.1
 binutils-2.17.tar.gz, Version 2.17



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

PRIMERGY TX150 S6, Intel Core 2 Duo E4500, 2.20 GHz

SPECint_rate2006 = 28.0

SPECint_rate_base2006 = 25.0

CPU2006 license: 22

Test sponsor: Fujitsu Siemens Computers

Tested by: Fujitsu Siemens Computers

Test date: Jan-2008

Hardware Availability: Jan-2008

Software Availability: Nov-2007

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	2	659	29.6	658	29.7	660	29.6	2	565	34.6	563	34.7	568	34.4
401.bzip2	2	1121	17.2	1114	17.3	1120	17.2	2	1081	17.9	1079	17.9	1065	18.1
403.gcc	2	685	23.5	715	22.5	681	23.7	2	715	22.5	683	23.6	704	22.9
429.mcf	2	702	26.0	704	25.9	701	26.0	2	711	25.6	712	25.6	712	25.6
445.gobmk	2	736	28.5	735	28.5	736	28.5	2	674	31.1	674	31.1	674	31.1
456.hammer	2	816	22.9	817	22.8	818	22.8	2	493	37.8	493	37.8	493	37.8
458.sjeng	2	928	26.1	918	26.4	918	26.4	2	833	29.1	839	28.9	837	28.9
462.libquantum	2	1705	24.3	1686	24.6	1686	24.6	1	609	34.0	609	34.0	609	34.0
464.h264ref	2	1022	43.3	1021	43.4	1021	43.3	2	968	45.7	969	45.7	968	45.7
471.omnetpp	2	669	18.7	661	18.9	662	18.9	2	629	19.9	630	19.9	629	19.9
473.astar	2	821	17.1	821	17.1	817	17.2	2	758	18.5	757	18.6	758	18.5
483.xalancbmk	2	429	32.2	427	32.3	431	32.0	2	429	32.2	427	32.3	431	32.0

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

'OMP_NUM_THREADS' set to number of cores (default)

General Notes

This result has been produced with binaries provided and compiled by Intel.

All binaries were built with 32-bit Intel compiler except:
401.bzip2 and 456.hammer in peak were built with 64-bit Intel compiler by changing the path for include and library files.

BIOS configuration:
Hardware Prefetch = Enable, Adjacent Sector Prefetch = Disable

For information about Fujitsu Siemens Computers please see:
<http://www.fujitsu-siemens.com>

Base Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

PRIMERGY TX150 S6, Intel Core 2 Duo E4500, 2.20 GHz

SPECint_rate2006 = 28.0

SPECint_rate_base2006 = 25.0

CPU2006 license: 22

Test sponsor: Fujitsu Siemens Computers

Tested by: Fujitsu Siemens Computers

Test date: Jan-2008

Hardware Availability: Jan-2008

Software Availability: Nov-2007

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:

-fast -inline-calloc -opt-malloc-options=3

C++ benchmarks:

-xT -ipo -O3 -no-prec-div -Wl,-z,muldefs
-L/home/cmplr/usr3/alrahate/cpu2006.1.0/lib -lsmartheap

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):

icc

401.bzip2: /home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux64/bin/icc
-L/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux64/lib
-I/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux64/include

456.hmmer: /home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux64/bin/icc
-L/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux64/lib
-I/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux64/include

C++ benchmarks:

icpc

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
401.bzip2: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LINUX

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

PRIMERGY TX150 S6, Intel Core 2 Duo E4500, 2.20 GHz

SPECint_rate2006 = 28.0

SPECint_rate_base2006 = 25.0

CPU2006 license: 22

Test sponsor: Fujitsu Siemens Computers

Tested by: Fujitsu Siemens Computers

Test date: Jan-2008

Hardware Availability: Jan-2008

Software Availability: Nov-2007

Peak Portability Flags (Continued)

483.xalanbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -prof-gen(pass 1) -prof-use(pass 2) -fast -ansi-alias
-prefetch

401.bzip2: -prof-gen(pass 1) -prof-use(pass 2) -fast -prefetch

403.gcc: -fast -inline-calloc -opt-malloc-options=3

429.mcf: -fast -prefetch

445.gobmk: -prof-gen(pass 1) -prof-use(pass 2) -xT -O2 -ipo
-no-prec-div -ansi-alias

456.hmmer: -fast -unroll2 -ansi-alias -opt-multi-version-aggressive

458.sjeng: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll4

462.libquantum: -fast -unroll4 -Ob0 -prefetch
-opt-streaming-stores always -vec-guard-write
-opt-malloc-options=3 -parallel -par-runtime-control

464.h264ref: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2
-ansi-alias

C++ benchmarks:

471.omnetpp: -prof-gen(pass 1) -prof-use(pass 2) -xT -O3 -ipo
-no-prec-div -ansi-alias -opt-ra-region-strategy=block
-Wl,-z,muldefs
-L/home/cmplr/usr3/alrahate/cpu2006.1.0/lib -lsmartheap

473.astar: -prof-gen(pass 1) -prof-use(pass 2) -xT -O3 -ipo
-no-prec-div -ansi-alias -opt-ra-region-strategy=routine
-Wl,-z,muldefs
-L/home/cmplr/usr3/alrahate/cpu2006.1.0/lib -lsmartheap

483.xalanbmk: basepeak = yes



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

PRIMERGY TX150 S6, Intel Core 2 Duo E4500, 2.20 GHz

SPECint_rate2006 = 28.0

SPECint_rate_base2006 = 25.0

CPU2006 license: 22

Test sponsor: Fujitsu Siemens Computers

Tested by: Fujitsu Siemens Computers

Test date: Jan-2008

Hardware Availability: Jan-2008

Software Availability: Nov-2007

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic10-ia32-intel64-linux-flags.20090714.01.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic10-ia32-intel64-linux-flags.20090714.01.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Jul 22 16:02:45 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 19 February 2008.