SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

PRIMERGY RX200 S4, Intel Xeon L5420, 2.50 GHz

SPECint®_rate2006 = 119

SPECint_rate_base2006 = 97.2

CPU2006 license: 22
Test sponsor: Fujitsu Siemens Computers
Tested by: Fujitsu Siemens Computers

Test date: Feb-2008
Hardware Availability: Mar-2008
Software Availability: Nov-2007

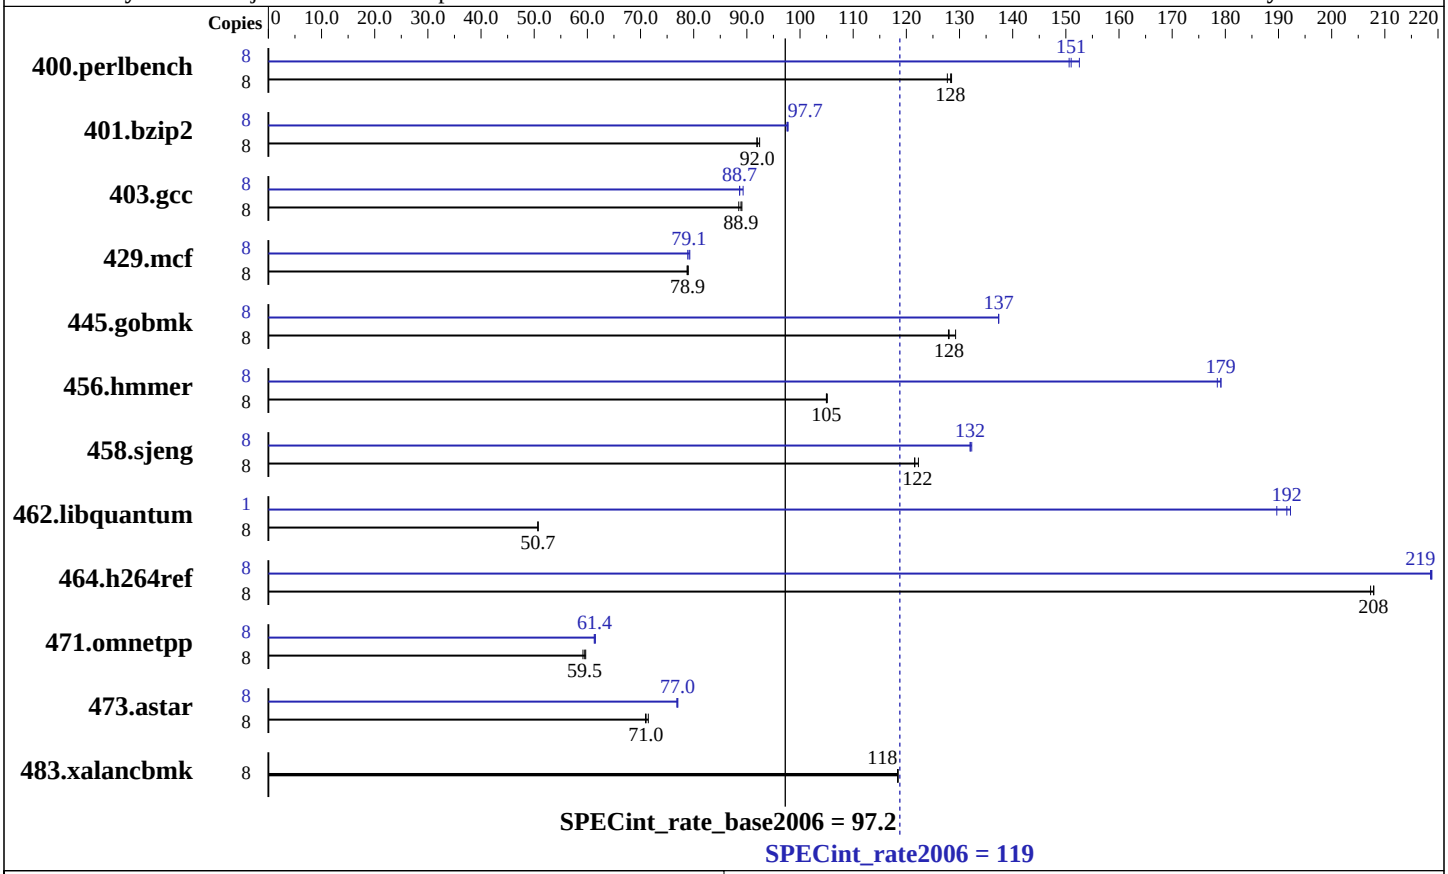

Hardware

CPU Name:	Intel Xeon L5420
CPU Characteristics:	1333 MHz system bus
CPU MHz:	2500
FPU:	Integrated
CPU(s) enabled:	8 cores, 2 chips, 4 cores/chip
CPU(s) orderable:	1,2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	12 MB I+D on chip per chip, 6 MB shared / 2 cores
L3 Cache:	None
Other Cache:	None
Memory:	16 GB (8x2 GB PC2-5300F, 2 rank, CAS 5-5-5, with ECC)
Disk Subsystem:	Seagate ST973451SS (SAS, 73GB, 15000rpm)
Other Hardware:	None

Software

Operating System:	SUSE Linux Enterprise Server 10 (x86_64) SP1, Kernel 2.6.16.46-0.12-smp
Compiler:	Intel C++ Compiler for Linux32 and Linux64 Version 10.1 - Build 20070725
Auto Parallel:	Yes
File System:	ext2
System State:	Multiuser, Runlevel 3
Base Pointers:	32-bit
Peak Pointers:	32/64-bit
Other Software:	MicroQuill SmartHeap Library, Version 8.1 binutils-2.17.tar.gz, Version 2.17

SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

PRIMERGY RX200 S4, Intel Xeon L5420, 2.50 GHz

SPECint_rate2006 = 119

SPECint_rate_base2006 = 97.2

CPU2006 license: 22
Test sponsor: Fujitsu Siemens Computers
Tested by: Fujitsu Siemens Computers

Test date: Feb-2008
Hardware Availability: Mar-2008
Software Availability: Nov-2007

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	8	**609**	**128**	612	128	608	129	8	512	153	519	151	**518**	**151**
401.bzip2	8	840	91.9	**840**	**92.0**	835	92.4	8	791	97.5	**791**	**97.7**	790	97.8
403.gcc	8	723	89.1	**724**	**88.9**	728	88.5	8	**726**	**88.7**	727	88.6	721	89.3
429.mcf	8	924	79.0	**925**	**78.9**	926	78.8	8	925	78.9	920	79.3	**922**	**79.1**
445.gobmk	8	656	128	**655**	**128**	649	129	8	611	137	611	137	**611**	**137**
456.hmmer	8	711	105	**711**	**105**	710	105	8	**417**	**179**	417	179	418	178
458.sjeng	8	**796**	**122**	796	122	792	122	8	732	132	733	132	**733**	**132**
462.libquantum	8	**3269**	**50.7**	3269	50.7	3267	50.7	1	**108**	**192**	109	190	108	192
464.h264ref	8	851	208	**852**	**208**	854	207	8	809	219	810	219	**809**	**219**
471.omnetpp	8	845	59.2	**840**	**59.5**	838	59.7	8	**814**	**61.4**	816	61.3	813	61.5
473.astar	8	786	71.5	**790**	**71.0**	792	70.9	8	**730**	**77.0**	729	77.0	731	76.8
483.xalancbmk	8	**466**	**118**	466	118	466	118	8	**466**	**118**	466	118	466	118

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

'OMP_NUM_THREADS' set to number of cores (default)

General Notes

This result has been produced with binaries provided and compiled by Intel.

All binaries were built with 32-bit Intel compiler except:
401.bzip2 and 456.hmmer in peak were built with 64-bit Intel
compiler by changing the path for include and library files.

BIOS configuration:
Adjacent Sector Prefetch = Disable

For information about Fujitsu Siemens Computers please see:
http://www.fujitsu-siemens.com

Base Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
-fast -inline-calloc -opt-malloc-options=3

C++ benchmarks:
-xT -ipo -O3 -no-prec-div -Wl,-z,muldefs
-L/home/cmplr/usr3/alrahate/cpu2006.1.0/lib -lsmartheap

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):
icc

401.bzip2: /home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux64/bin/icc
-L/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux64/lib
-I/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux64/include

456.hmmer: /home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux64/bin/icc
-L/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux64/lib
-I/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux64/include

C++ benchmarks:
icpc

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
401.bzip2: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LINUX

Continued on next page

Peak Portability Flags (Continued)

483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -prof-gen(pass 1) -prof-use(pass 2) -fast -ansi-alias -prefetch

401.bzip2: -prof-gen(pass 1) -prof-use(pass 2) -fast -prefetch

403.gcc: -fast -inline-calloc -opt-malloc-options=3

429.mcf: -fast -prefetch

445.gobmk: -prof-gen(pass 1) -prof-use(pass 2) -xT -O2 -ipo -no-prec-div -ansi-alias

456.hmmer: -fast -unroll2 -ansi-alias -opt-multi-version-aggressive

458.sjeng: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll4

462.libquantum: -fast -unroll4 -Ob0 -prefetch -opt-streaming-stores always -vec-guard-write -opt-malloc-options=3 -parallel -par-runtime-control

464.h264ref: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -prof-gen(pass 1) -prof-use(pass 2) -xT -O3 -ipo -no-prec-div -ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs -L/home/cmplr/usr3/alrahate/cpu2006.1.0/lib -lsmartheap

473.astar: -prof-gen(pass 1) -prof-use(pass 2) -xT -O3 -ipo -no-prec-div -ansi-alias -opt-ra-region-strategy=routine -Wl,-z,muldefs -L/home/cmplr/usr3/alrahate/cpu2006.1.0/lib -lsmartheap

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

The flags file that was used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/Intel-ic10.1-INT-ia32-linux-flags.20090714.04.html`

You can also download the XML flags source by saving the following link:
`http://www.spec.org/cpu2006/flags/Intel-ic10.1-INT-ia32-linux-flags.20090714.04.xml`

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Jul 22 15:44:34 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 5 March 2008.