SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

ProLiant BL460c
(2.66 GHz, Intel Xeon E5430)

SPECfp®2006 = 21.7

SPECfp_base2006 = 18.4

CPU2006 license: 3
Test sponsor: Hewlett-Packard Company
Tested by: Hewlett-Packard Company

Test date: Feb-2008
Hardware Availability: Nov-2007
Software Availability: Nov-2007

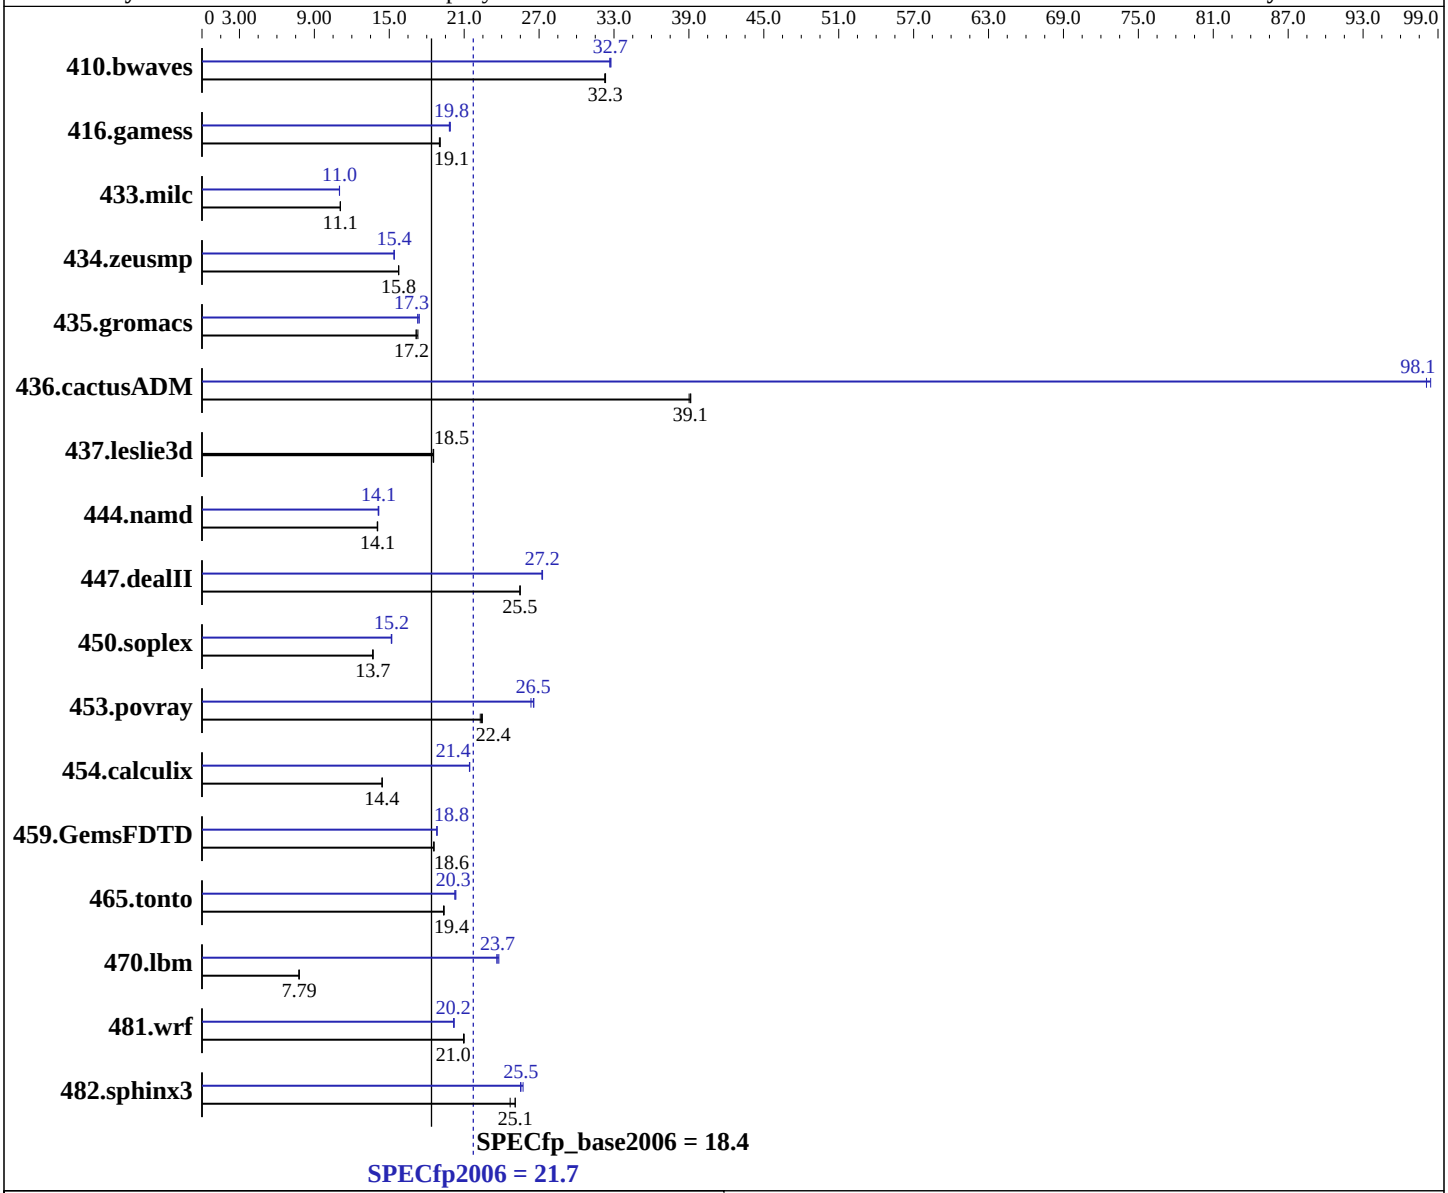

Hardware

CPU Name:	Intel Xeon E5430
CPU Characteristics:	2.66 GHz, 2x6 MB L2 shared, 1333 MHz system bus
CPU MHz:	2666
FPU:	Integrated
CPU(s) enabled:	8 cores, 2 chips, 4 cores/chip
CPU(s) orderable:	1,2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	12 MB I+D on chip per chip, 6 MB shared / 2 cores

Continued on next page

Software

Operating System:	SUSE Linux Enterprise Server 10 (x86_64) SP1, Kernel 2.6.16.46-0.12-smp
Compiler:	Intel C++ Compiler 10.1 for Linux Build 20070913 Package ID: l_cc_p_10.1.008 Intel Fortran Compiler 10.1 for Linux Build 20070913 Package ID: l_cc_p_10.1.008
Auto Parallel:	Yes
File System:	ext2
System State:	Run level 3 (multi-user)

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

ProLiant BL460c
(2.66 GHz, Intel Xeon E5430)

SPECfp2006 = 21.7

SPECfp_base2006 = 18.4

CPU2006 license: 3
Test sponsor: Hewlett-Packard Company
Tested by: Hewlett-Packard Company

Test date: Feb-2008
Hardware Availability: Nov-2007
Software Availability: Nov-2007

L3 Cache: None
Other Cache: None
Memory: 16 GB (8x2 GB PC2-5300F CL5)
Disk Subsystem: 1x72 GB 15 K SAS
Other Hardware: None

Base Pointers: 64-bit
Peak Pointers: 32/64-bit
Other Software: binutils-2.17.50

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	420	32.3	**421**	**32.3**	421	32.3	416	32.7	**415**	**32.7**	415	32.8
416.gamess	**1027**	**19.1**	1027	19.1	1030	19.0	988	19.8	984	19.9	**987**	**19.8**
433.milc	**828**	**11.1**	828	11.1	829	11.1	**833**	**11.0**	833	11.0	834	11.0
434.zeusmp	577	15.8	578	15.7	**578**	**15.8**	**591**	**15.4**	591	15.4	591	15.4
435.gromacs	417	17.1	**415**	**17.2**	413	17.3	**413**	**17.3**	413	17.3	410	17.4
436.cactusADM	305	39.2	**305**	**39.1**	306	39.0	122	98.1	**122**	**98.1**	121	98.4
437.leslie3d	507	18.6	**507**	**18.5**	508	18.5	507	18.6	**507**	**18.5**	508	18.5
444.namd	571	14.0	**570**	**14.1**	570	14.1	566	14.2	**567**	**14.1**	568	14.1
447.dealII	**449**	**25.5**	449	25.5	449	25.5	420	27.2	**420**	**27.2**	419	27.3
450.soplex	608	13.7	610	13.7	**610**	**13.7**	550	15.2	**549**	**15.2**	549	15.2
453.povray	239	22.3	**238**	**22.4**	237	22.5	**200**	**26.5**	200	26.6	202	26.4
454.calculix	**572**	**14.4**	571	14.4	572	14.4	385	21.4	**385**	**21.4**	385	21.4
459.GemsFDTD	571	18.6	**571**	**18.6**	571	18.6	564	18.8	**564**	**18.8**	564	18.8
465.tonto	507	19.4	**508**	**19.4**	509	19.3	484	20.3	**485**	**20.3**	486	20.3
470.lbm	1764	7.79	1771	7.76	**1765**	**7.79**	578	23.8	582	23.6	**580**	**23.7**
481.wrf	532	21.0	**533**	**21.0**	533	20.9	**554**	**20.2**	554	20.2	553	20.2
482.sphinx3	777	25.1	790	24.7	**777**	**25.1**	758	25.7	**763**	**25.5**	764	25.5

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

```
'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run
 OMP_NUM_THREADS set to number of cores
 KMP_AFFINITY set to physical,0
 KMP_STACKSIZE set to 200M
```

Platform Notes

```
BIOS configuration:
  Power Regulator set to Static High Performance Mode
```

Base Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc

Fortran benchmarks:
ifort

Benchmarks using both Fortran and C:
icc ifort

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
-fast -parallel

C++ benchmarks:
-fast -parallel

Fortran benchmarks:
-fast -parallel

Benchmarks using both Fortran and C:
-fast -parallel

Peak Compiler Invocation

C benchmarks (except as noted below):
`/opt/intel/cc/10.1.008/bin/icc -L/opt/intel/cc/10.1.008/lib -I/opt/intel/cc/10.1.008/include`

433.milc: `icc`

C++ benchmarks (except as noted below):
`icpc`

450.soplex: `/opt/intel/cc/10.1.008/bin/icpc -L/opt/intel/cc/10.1.008/lib -I/opt/intel/cc/10.1.008/include`

Fortran benchmarks:
`ifort`

Benchmarks using both Fortran and C:
`icc ifort`

Peak Portability Flags

410.bwaves: `-DSPEC_CPU_LP64`
416.gamess: `-DSPEC_CPU_LP64`
433.milc: `-DSPEC_CPU_LP64`
434.zeusmp: `-DSPEC_CPU_LP64`
435.gromacs: `-DSPEC_CPU_LP64 -nofor_main`
436.cactusADM: `-DSPEC_CPU_LP64 -nofor_main`
437.leslie3d: `-DSPEC_CPU_LP64`
444.namd: `-DSPEC_CPU_LP64`
447.dealII: `-DSPEC_CPU_LP64`
453.povray: `-DSPEC_CPU_LP64`
454.calculix: `-DSPEC_CPU_LP64 -nofor_main`
459.GemsFDTD: `-DSPEC_CPU_LP64`
465.tonto: `-DSPEC_CPU_LP64`
481.wrf: `-DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX`

Peak Optimization Flags

C benchmarks:

433.milc: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -fno-alias -auto-ilp32`

470.lbm: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -unroll2 -scalar-rep- -prefetch -opt-malloc-options=3`

Continued on next page

Peak Optimization Flags (Continued)

482.sphinx3: `-fast -unroll2`

C++ benchmarks:

444.namd: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -fno-alias -auto-ilp32`

447.dealII: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -unroll2 -ansi-alias -scalar-rep-`

450.soplex: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -opt-malloc-options=3`

453.povray: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -unroll4 -ansi-alias`

Fortran benchmarks:

410.bwaves: `-fast -prefetch -parallel`

416.gamess: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -unroll2 -Ob0 -ansi-alias -scalar-rep-`

434.zeusmp: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast`

437.leslie3d: `basepeak = yes`

459.GemsFDTD: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -unroll2 -Ob0 -prefetch -parallel`

465.tonto: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -unroll4 -auto`

Benchmarks using both Fortran and C:

435.gromacs: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -prefetch -auto-ilp32`

436.cactusADM: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -unroll2 -prefetch -parallel -auto-ilp32`

454.calculix: `-fast -unroll-aggressive -auto-ilp32`

481.wrf: `-fast -parallel -prefetch -auto-ilp32`

The flags file that was used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/HP-Intel-ic10.1-linux-fp-flags.html`

You can also download the XML flags source by saving the following link:
`http://www.spec.org/cpu2006/flags/HP-Intel-ic10.1-linux-fp-flags.xml`

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Jul 22 15:23:51 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 25 March 2008.