SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

ProLiant BL260c G5
(3.0 GHz, Intel Xeon E5450)

SPECfp®2006 = 23.2

SPECfp_base2006 = 19.7

CPU2006 license: 3
Test sponsor: Hewlett-Packard Company
Tested by: Hewlett-Packard Company

Test date: Mar-2008
Hardware Availability: Mar-2008
Software Availability: Nov-2007

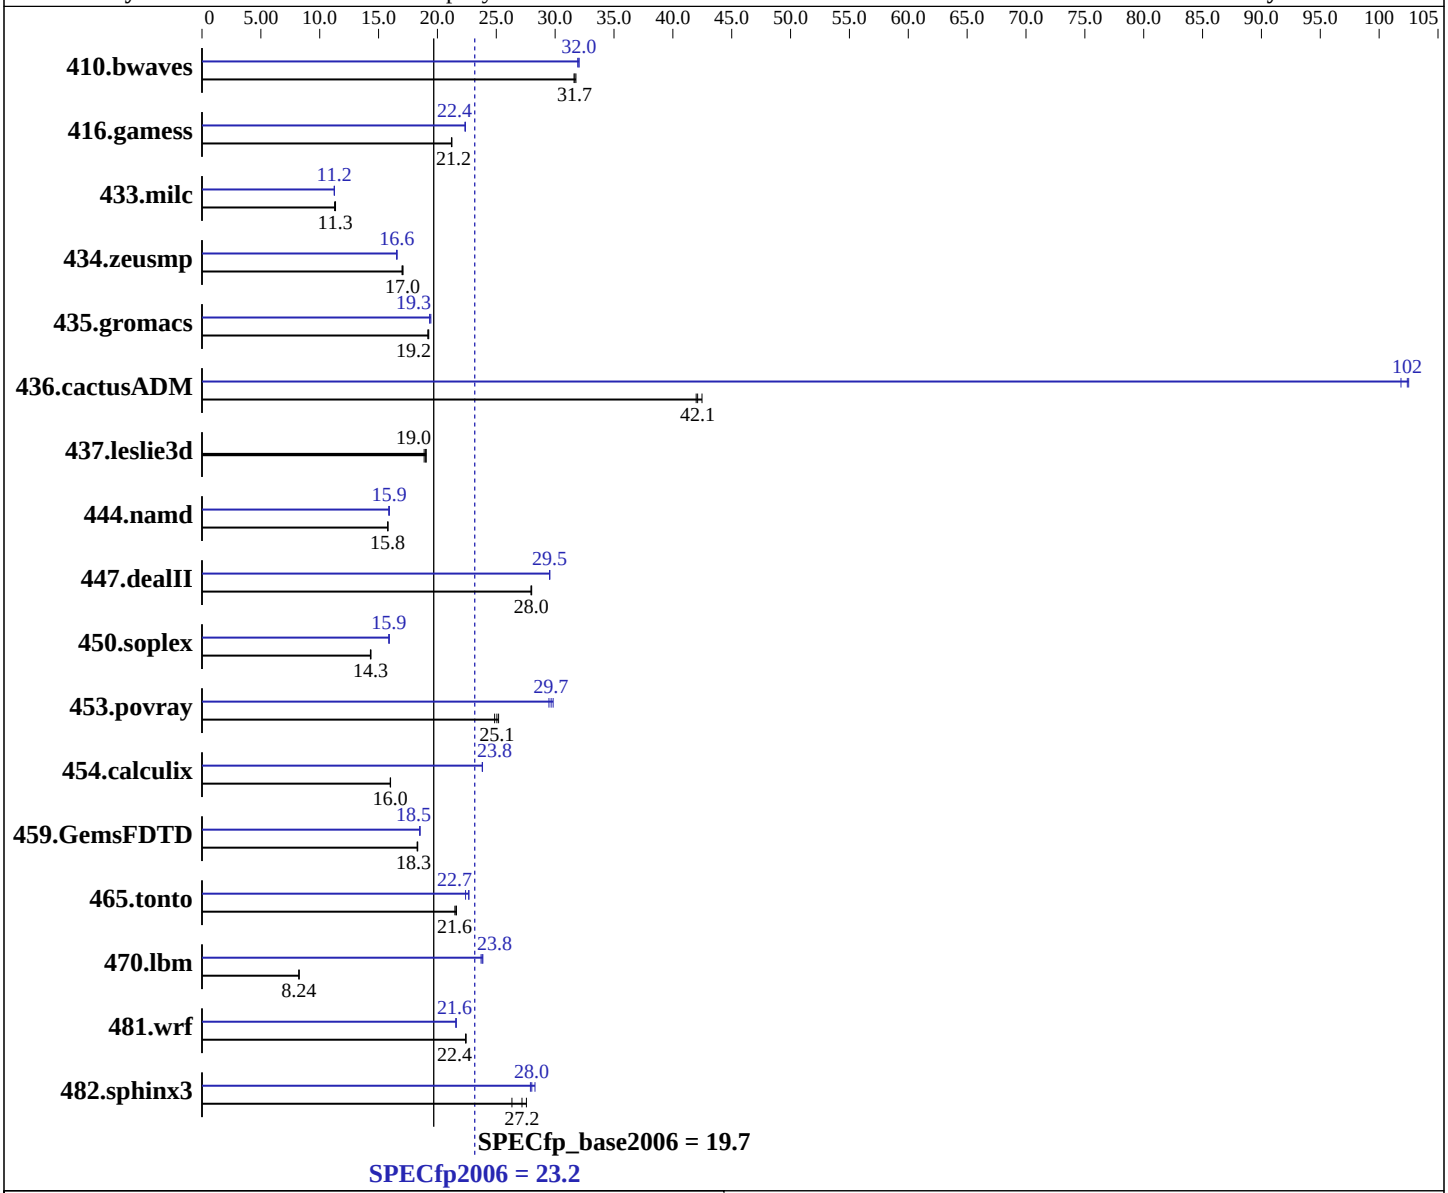

Hardware

CPU Name:	Intel Xeon E5450
CPU Characteristics:	3.0 GHz, 2x6 MB L2 shared, 1333 MHz system bus
CPU MHz:	3000
FPU:	Integrated
CPU(s) enabled:	8 cores, 2 chips, 4 cores/chip
CPU(s) orderable:	1,2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	12 MB I+D on chip per chip, 6 MB shared / 2 cores

Continued on next page

Software

Operating System:	SUSE Linux Enterprise Server 10 (x86_64) SP1, Kernel 2.6.16.46-0.12-smp
Compiler:	Intel C++ Compiler 10.1 for Linux Build 20070913 Package ID: l_cc_p_10.1.008 Intel Fortran Compiler 10.1 for Linux Build 20070913 Package ID: l_cc_p_10.1.008
Auto Parallel:	Yes
File System:	ext2
System State:	Run level 3 (multi-user)

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

ProLiant BL260c G5
(3.0 GHz, Intel Xeon E5450)

SPECfp2006 = 23.2

SPECfp_base2006 = 19.7

CPU2006 license: 3
Test sponsor: Hewlett-Packard Company
Tested by: Hewlett-Packard Company

Test date: Mar-2008
Hardware Availability: Mar-2008
Software Availability: Nov-2007

L3 Cache: None
Other Cache: None
Memory: 16 GB (4x4 GB PC2-5300P CL5)
Disk Subsystem: 1x72 GB 15 K SAS
Other Hardware: None

Base Pointers: 64-bit
Peak Pointers: 32/64-bit
Other Software: binutils-2.17.50

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	430	31.6	**429**	**31.7**	428	31.8	426	31.9	424	32.0	**424**	**32.0**
416.gamess	**923**	**21.2**	923	21.2	924	21.2	**876**	**22.4**	875	22.4	876	22.4
433.milc	815	11.3	809	11.3	**810**	**11.3**	**816**	**11.2**	816	11.2	816	11.2
434.zeusmp	536	17.0	533	17.1	**534**	**17.0**	551	16.5	549	16.6	**550**	**16.6**
435.gromacs	**372**	**19.2**	372	19.2	371	19.3	367	19.4	**369**	**19.3**	369	19.3
436.cactusADM	**284**	**42.1**	285	42.0	281	42.5	**117**	**102**	117	103	117	102
437.leslie3d	498	18.9	493	19.0	**495**	**19.0**	498	18.9	493	19.0	**495**	**19.0**
444.namd	508	15.8	**508**	**15.8**	508	15.8	**504**	**15.9**	504	15.9	505	15.9
447.dealII	409	28.0	408	28.0	**409**	**28.0**	387	29.5	387	29.5	**387**	**29.5**
450.soplex	**582**	**14.3**	583	14.3	581	14.4	**525**	**15.9**	524	15.9	525	15.9
453.povray	211	25.2	**212**	**25.1**	214	24.9	180	29.5	**179**	**29.7**	178	29.8
454.calculix	516	16.0	515	16.0	**516**	**16.0**	346	23.8	**346**	**23.8**	347	23.8
459.GemsFDTD	580	18.3	**580**	**18.3**	579	18.3	573	18.5	573	18.5	**573**	**18.5**
465.tonto	455	21.6	**456**	**21.6**	458	21.5	**434**	**22.7**	434	22.7	439	22.4
470.lbm	**1668**	**8.24**	1668	8.24	1666	8.25	576	23.9	**577**	**23.8**	580	23.7
481.wrf	**498**	**22.4**	499	22.4	498	22.4	517	21.6	**517**	**21.6**	518	21.6
482.sphinx3	740	26.3	707	27.6	**717**	**27.2**	**696**	**28.0**	689	28.3	699	27.9

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

```
'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run
 OMP_NUM_THREADS set to number of cores
 KMP_AFFINITY set to physical,0
 KMP_STACKSIZE set to 200M
```

Platform Notes

```
BIOS configuration:
  Power Regulator set to Static High Performance Mode
```

Base Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc

Fortran benchmarks:
ifort

Benchmarks using both Fortran and C:
icc ifort

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
-fast -parallel

C++ benchmarks:
-fast -parallel

Fortran benchmarks:
-fast -parallel

Benchmarks using both Fortran and C:
-fast -parallel

Peak Compiler Invocation

C benchmarks (except as noted below):
`/opt/intel/cc/10.1.008/bin/icc -L/opt/intel/cc/10.1.008/lib -I/opt/intel/cc/10.1.008/include`

433.milc: `icc`

C++ benchmarks (except as noted below):
`icpc`

450.soplex: `/opt/intel/cc/10.1.008/bin/icpc -L/opt/intel/cc/10.1.008/lib -I/opt/intel/cc/10.1.008/include`

Fortran benchmarks:
`ifort`

Benchmarks using both Fortran and C:
`icc ifort`

Peak Portability Flags

410.bwaves: `-DSPEC_CPU_LP64`
416.gamess: `-DSPEC_CPU_LP64`
433.milc: `-DSPEC_CPU_LP64`
434.zeusmp: `-DSPEC_CPU_LP64`
435.gromacs: `-DSPEC_CPU_LP64 -nofor_main`
436.cactusADM: `-DSPEC_CPU_LP64 -nofor_main`
437.leslie3d: `-DSPEC_CPU_LP64`
444.namd: `-DSPEC_CPU_LP64`
447.dealII: `-DSPEC_CPU_LP64`
453.povray: `-DSPEC_CPU_LP64`
454.calculix: `-DSPEC_CPU_LP64 -nofor_main`
459.GemsFDTD: `-DSPEC_CPU_LP64`
465.tonto: `-DSPEC_CPU_LP64`
481.wrf: `-DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX`

Peak Optimization Flags

C benchmarks:

433.milc: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -fno-alias -auto-ilp32`

470.lbm: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -unroll2 -scalar-rep- -prefetch -opt-malloc-options=3`

Continued on next page

Peak Optimization Flags (Continued)

482.sphinx3: `-fast -unroll2`

C++ benchmarks:

444.namd: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -fno-alias -auto-ilp32`

447.dealII: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -unroll2 -ansi-alias -scalar-rep-`

450.soplex: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -opt-malloc-options=3`

453.povray: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -unroll4 -ansi-alias`

Fortran benchmarks:

410.bwaves: `-fast -prefetch -parallel`

416.gamess: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -unroll2 -Ob0 -ansi-alias -scalar-rep-`

434.zeusmp: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast`

437.leslie3d: `basepeak = yes`

459.GemsFDTD: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -unroll2 -Ob0 -prefetch -parallel`

465.tonto: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -unroll4 -auto`

Benchmarks using both Fortran and C:

435.gromacs: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -prefetch -auto-ilp32`

436.cactusADM: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -unroll2 -prefetch -parallel -auto-ilp32`

454.calculix: `-fast -unroll-aggressive -auto-ilp32`

481.wrf: `-fast -parallel -prefetch -auto-ilp32`

The flags file that was used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/HP-Intel-ic10.1-linux-fp-flags.html`

You can also download the XML flags source by saving the following link:
`http://www.spec.org/cpu2006/flags/HP-Intel-ic10.1-linux-fp-flags.xml`

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Jul 22 17:53:29 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 3 April 2008.