SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

NovaScale T860 E1
(Intel Xeon X5460,3.16GHz)

SPECint®2006 = 27.4

SPECint_base2006 = 24.0

CPU2006 license: 20
Test sponsor: Bull SAS
Tested by: NEC Corporation

Test date: Mar-2008
Hardware Availability: Feb-2008
Software Availability: Nov-2007

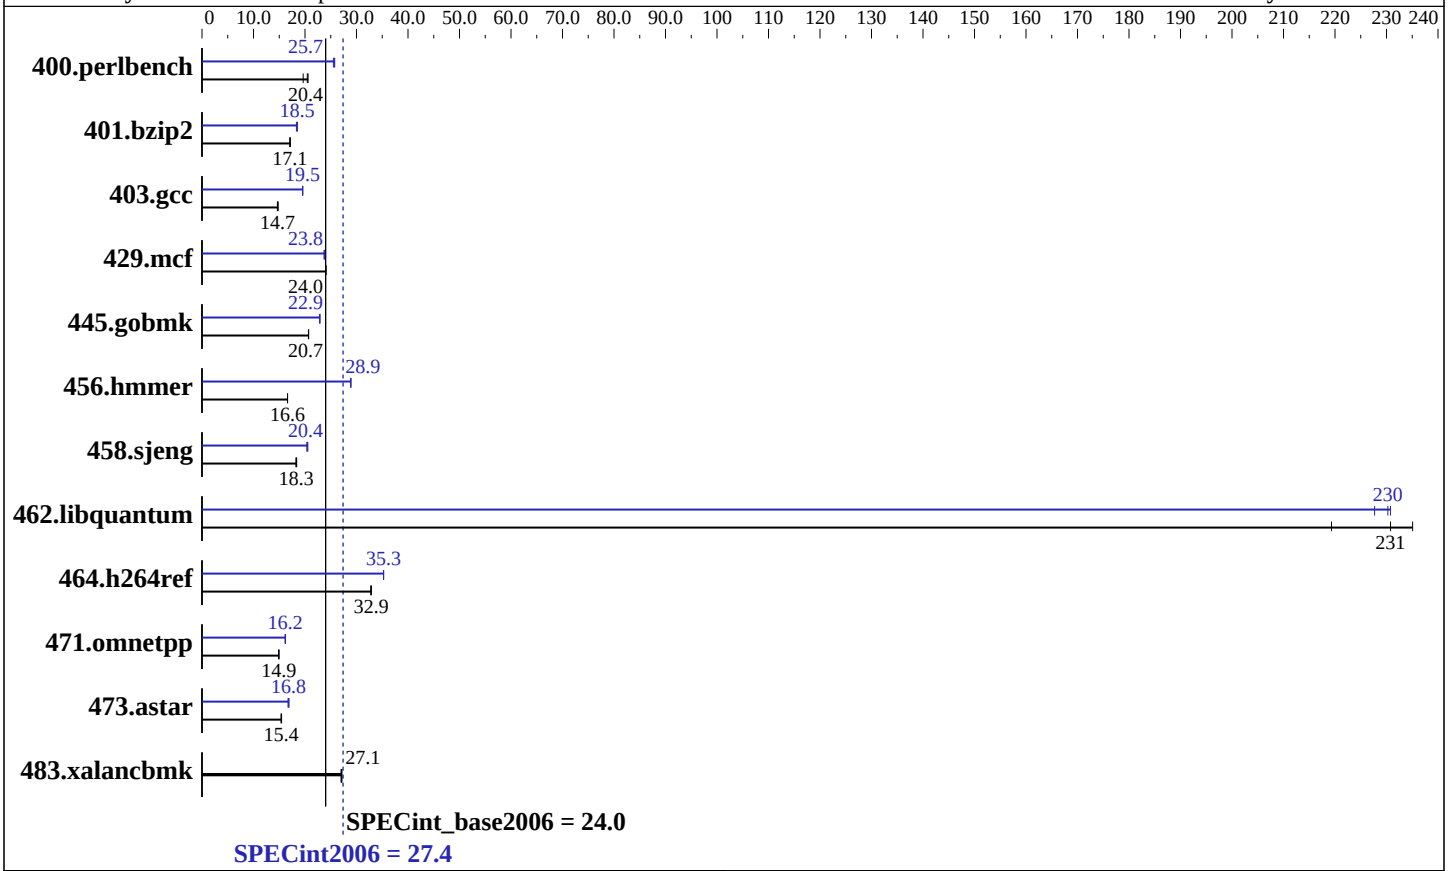

Hardware

CPU Name:	Intel Xeon X5460
CPU Characteristics:	3.16 GHz, 2x6 MB L2 shared, 1333 MHz bus
CPU MHz:	3167
FPU:	Integrated
CPU(s) enabled:	8 cores, 2 chips, 4 cores/chip
CPU(s) orderable:	1,2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	12 MB I+D on chip per chip, 6 MB shared / 2 cores
L3 Cache:	None
Other Cache:	None
Memory:	12 GB (12x1 GB PC2-5300F, 2 rank, CL5-5-5, ECC)
Disk Subsystem:	1x73.2 GB SAS, 15000RPM
Other Hardware:	None

Software

Operating System:	SUSE Linux Enterprise Server 10 (x86_64) SP1, Kernel 2.6.16.46-0.12-smp
Compiler:	Intel C++ Compiler for Linux32 and Linux64 version 10.1 Build 20070913 Package ID: l_cc_p_10.1.008
Auto Parallel:	Yes
File System:	ext2
System State:	Run level 3 (multi-user)
Base Pointers:	32-bit
Peak Pointers:	32/64-bit
Other Software:	MicroQuill SmartHeap library 8.1 binutils-2.17.tar.gz, Version 2.17

SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

NovaScale T860 E1
(Intel Xeon X5460,3.16GHz)

SPECint2006 = 27.4

SPECint_base2006 = 24.0

CPU2006 license: 20
Test sponsor: Bull SAS
Tested by: NEC Corporation

Test date: Mar-2008
Hardware Availability: Feb-2008
Software Availability: Nov-2007

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	474	20.6	**478**	**20.4**	497	19.6	379	25.8	**381**	**25.7**	383	25.5
401.bzip2	**564**	**17.1**	563	17.1	566	17.1	526	18.3	521	18.5	**522**	**18.5**
403.gcc	550	14.6	544	14.8	**548**	**14.7**	412	19.5	411	19.6	**412**	**19.5**
429.mcf	**380**	**24.0**	378	24.1	380	24.0	385	23.7	382	23.8	**384**	**23.8**
445.gobmk	**507**	**20.7**	508	20.7	507	20.7	458	22.9	**459**	**22.9**	459	22.9
456.hmmer	**562**	**16.6**	562	16.6	561	16.6	323	28.9	323	28.9	**323**	**28.9**
458.sjeng	**660**	**18.3**	664	18.2	658	18.4	594	20.4	**592**	**20.4**	589	20.6
462.libquantum	**89.8**	**231**	88.1	235	94.5	219	89.8	231	91.0	228	**90.0**	**230**
464.h264ref	673	32.9	**673**	**32.9**	675	32.8	627	35.3	628	35.2	**628**	**35.3**
471.omnetpp	420	14.9	**419**	**14.9**	419	14.9	**386**	**16.2**	387	16.1	386	16.2
473.astar	**455**	**15.4**	454	15.5	457	15.4	416	16.9	**417**	**16.8**	420	16.7
483.xalancbmk	256	27.0	**255**	**27.1**	254	27.2	256	27.0	**255**	**27.1**	254	27.2

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

```
'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run
 OMP_NUM_THREADS set to number of cores
```

Platform Notes

```
Bios settings:
Intel SpeedStep Technology: Disabled
```

General Notes

```
All benchmarks compiled in 32-bit mode except 401.bzip2 and 456.hmmer,
for peak, are compiled in 64-bit mode

 The NEC Express5800/120Lj(Intel Xeon X5460) and
 the Bull NovaScale T860 E1(Intel Xeon X5460,3.16GHz) models are electronically equivalent.
 The results have been measured on a NEC Express5800/120Lj(Intel Xeon X5460) model.
```

Base Compiler Invocation

C benchmarks:
```
icc
```

C++ benchmarks:
```
icpc
```

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
-fast -vec-guard-write -parallel -par-runtime-control

C++ benchmarks:
-xT -ipo -O3 -no-prec-div -Wl,-z,muldefs
-L/opt/SmartHeap_8.1/lib -lsmartheap

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):
icc

401.bzip2: /opt/intel/cce/10.1.008/bin/icc
-L/opt/intel/cce/10.1.008/lib
-I/opt/intel/cce/10.1.008/include

456.hmmer: /opt/intel/cce/10.1.008/bin/icc
-L/opt/intel/cce/10.1.008/lib
-I/opt/intel/cce/10.1.008/include

C++ benchmarks:
icpc

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
401.bzip2: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LINUX

Continued on next page

Peak Portability Flags (Continued)

483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -prof-gen(pass 1) -prof-use(pass 2) -fast -ansi-alias -prefetch

401.bzip2: -prof-gen(pass 1) -prof-use(pass 2) -fast -prefetch -auto-ilp32

403.gcc: -fast -inline-calloc -opt-malloc-options=3

429.mcf: -fast -prefetch

445.gobmk: -prof-gen(pass 1) -prof-use(pass 2) -xT -O2 -ipo -no-prec-div -ansi-alias

456.hmmer: -fast -unroll2 -ansi-alias -opt-multi-version-aggressive -auto-ilp32

458.sjeng: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll4

462.libquantum: -fast -unroll4 -Ob0 -prefetch -opt-streaming-stores always -vec-guard-write -opt-malloc-options=3 -parallel -par-runtime-control

464.h264ref: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -prof-gen(pass 1) -prof-use(pass 2) -xT -O3 -ipo -no-prec-div -ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs -L/opt/SmartHeap_8.1/lib -lsmartheap

473.astar: -prof-gen(pass 1) -prof-use(pass 2) -xT -O3 -ipo -no-prec-div -ansi-alias -opt-ra-region-strategy=routine -Wl,-z,muldefs -L/opt/SmartHeap_8.1/lib -lsmartheap

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

The flags file that was used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/NEC-Intel-ic10.1-INT-ia32-linux-flags.20090713.html`

You can also download the XML flags source by saving the following link:
`http://www.spec.org/cpu2006/flags/NEC-Intel-ic10.1-INT-ia32-linux-flags.20090713.xml`

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Jul 22 18:17:06 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 8 April 2008.