SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated

Acer Altos R720 (Intel Xeon X5460)

SPECint®_rate2006 = 71.5

SPECint_rate_base2006 = 60.7

CPU2006 license: 97
Test sponsor: Acer Incorporated
Tested by: Acer Incorporated

Test date: Mar-2008
Hardware Availability: Nov-2007
Software Availability: Nov-2007

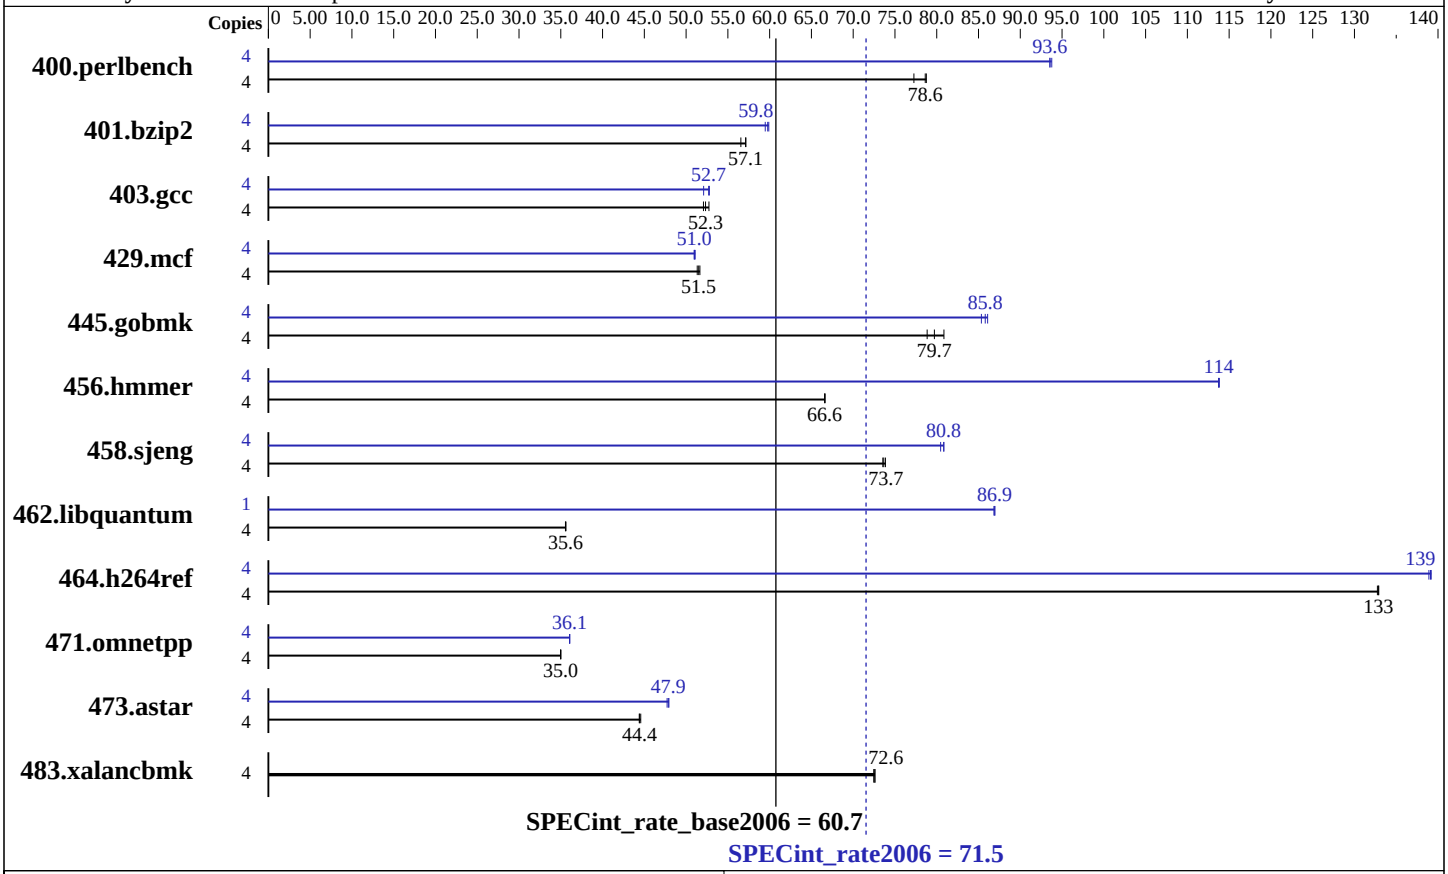

Hardware

CPU Name:	Intel Xeon X5460
CPU Characteristics:	1333MHz system bus
CPU MHz:	3160
FPU:	Integrated
CPU(s) enabled:	4 cores, 1 chip, 4 cores/chip
CPU(s) orderable:	1, 2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	12 MB I+D on chip per chip, 6 MB shared / 2 cores
L3 Cache:	None
Other Cache:	None
Memory:	16 GB (8 x 2048MB ECC FB-DIMM DDR2-667 CL5-5-5)
Disk Subsystem:	1 x 73GB 10K RPM SAS HDD
Other Hardware:	None

Software

Operating System:	SuSE Linux Enterprise Server 10 SP1 (x86_64) Kernel 2.6.16.46-0.12-smp
Compiler:	Intel C++ Compiler 10.1 for Linux Build 20070913 Package ID: l_cc_p_10.1.008
Auto Parallel:	Yes
File System:	ReiserFS
System State:	Multi-user, level 3
Base Pointers:	32-bit
Peak Pointers:	32/64-bit
Other Software:	Microquill SmartHeap V8.1 Binutils 2.17.50.0.15

SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated

Acer Altos R720 (Intel Xeon X5460)

SPECint_rate2006 = 71.5

SPECint_rate_base2006 = 60.7

CPU2006 license: 97
Test sponsor: Acer Incorporated
Tested by: Acer Incorporated

Test date: Mar-2008
Hardware Availability: Nov-2007
Software Availability: Nov-2007

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	4	506	77.3	496	78.8	**497**	**78.6**	4	417	93.8	**418**	**93.6**	418	93.5
401.bzip2	4	**676**	**57.1**	675	57.2	683	56.6	4	649	59.5	**646**	**59.8**	644	59.9
403.gcc	4	**615**	**52.3**	618	52.1	611	52.7	4	**611**	**52.7**	610	52.8	618	52.1
429.mcf	4	706	51.7	711	51.3	**708**	**51.5**	4	**715**	**51.0**	716	51.0	714	51.1
445.gobmk	4	519	80.9	532	78.9	**526**	**79.7**	4	492	85.3	**489**	**85.8**	487	86.1
456.hmmer	4	**560**	**66.6**	560	66.6	560	66.6	4	**328**	**114**	328	114	328	114
458.sjeng	4	655	73.9	658	73.5	**657**	**73.7**	4	601	80.5	**599**	**80.8**	599	80.9
462.libquantum	4	2331	35.6	2327	35.6	**2330**	**35.6**	1	238	87.0	239	86.8	**238**	**86.9**
464.h264ref	4	667	133	666	133	**666**	**133**	4	**636**	**139**	636	139	637	139
471.omnetpp	4	**715**	**35.0**	715	35.0	714	35.0	4	693	36.1	693	36.1	**693**	**36.1**
473.astar	4	633	44.4	**632**	**44.4**	630	44.6	4	**587**	**47.9**	586	47.9	588	47.7
483.xalancbmk	4	381	72.5	**380**	**72.6**	380	72.6	4	381	72.5	**380**	**72.6**	380	72.6

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

General Notes

```
This result was measured on the Acer Altos R520.
The Altos R720 and Altos R520 are electronically equivalent.

All benchmarks compiled in 32-bit mode except 401.bzip2 and 456.hmmer,
for peak, are compiled in 64-bit mode
BIOS Settings
  Hardware Prefetcher set to ON

  Adjacent Cache Line Prefetch set to OFF

All results but peak 462.libquantum used taskset to bind
processes to cores.
"ulimit -s unlimited" was set for stacksize unlimited
OMP_NUM_THREADS set to number of cores
```

Base Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc

Base Portability Flags

400.perlbench: `-DSPEC_CPU_LINUX_IA32`
462.libquantum: `-DSPEC_CPU_LINUX`
483.xalancbmk: `-DSPEC_CPU_LINUX`

Base Optimization Flags

C benchmarks:
`-fast -inline-calloc -opt-malloc-options=3`

C++ benchmarks:
`-xT -ipo -O3 -no-prec-div -Wl,-z,muldefs`
`-L/spec/users/rahul/cpu2006.1.0/lib -lsmartheap`

Base Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

Peak Compiler Invocation

C benchmarks (except as noted below):
`icc`

401.bzip2: `/opt/intel/cce/10.1.008/bin/icc`
`-L/opt/intel/cce/10.1.008/lib`
`-I/opt/intel/cce/10.1.008/include`

456.hmmer: `/opt/intel/cce/10.1.008/bin/icc`
`-L/opt/intel/cce/10.1.008/lib`
`-I/opt/intel/cce/10.1.008/include`

C++ benchmarks:
`icpc`

Peak Portability Flags

400.perlbench: `-DSPEC_CPU_LINUX_IA32`
401.bzip2: `-DSPEC_CPU_LP64`
456.hmmer: `-DSPEC_CPU_LP64`
462.libquantum: `-DSPEC_CPU_LINUX`

Continued on next page

Peak Portability Flags (Continued)

483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -prof-gen(pass 1) -prof-use(pass 2) -fast -ansi-alias -prefetch

401.bzip2: -prof-gen(pass 1) -prof-use(pass 2) -fast -prefetch

403.gcc: -fast -inline-calloc -opt-malloc-options=3

429.mcf: -fast -prefetch

445.gobmk: -prof-gen(pass 1) -prof-use(pass 2) -xT -O2 -ipo -no-prec-div -ansi-alias

456.hmmer: -fast -unroll2 -ansi-alias -opt-multi-version-aggressive

458.sjeng: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll4

462.libquantum: -fast -unroll4 -Ob0 -prefetch -opt-streaming-stores always -vec-guard-write -opt-malloc-options=3 -parallel -par-runtime-control

464.h264ref: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -prof-gen(pass 1) -prof-use(pass 2) -xT -O3 -ipo -no-prec-div -ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs -L/spec/users/rahul/cpu2006.1.0/lib -lsmartheap

473.astar: -prof-gen(pass 1) -prof-use(pass 2) -xT -O3 -ipo -no-prec-div -ansi-alias -opt-ra-region-strategy=routine -Wl,-z,muldefs -L/spec/users/rahul/cpu2006.1.0/lib -lsmartheap

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

The flags file that was used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/Intel-ic10.1-int-linux64-revC.20090713.html`

You can also download the XML flags source by saving the following link:
`http://www.spec.org/cpu2006/flags/Intel-ic10.1-int-linux64-revC.20090713.xml`

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Jul 22 18:21:06 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 15 April 2008.