SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

Bull Escala PL460 (4.2 GHz, 4 cores)

SPECint®_rate2006 = 90.6

SPECint_rate_base2006 = 82.3

CPU2006 license: 20
Test sponsor: Bull SAS
Tested by: Bull SAS

Test date: Feb-2008
Hardware Availability: Mar-2008
Software Availability: Feb-2008

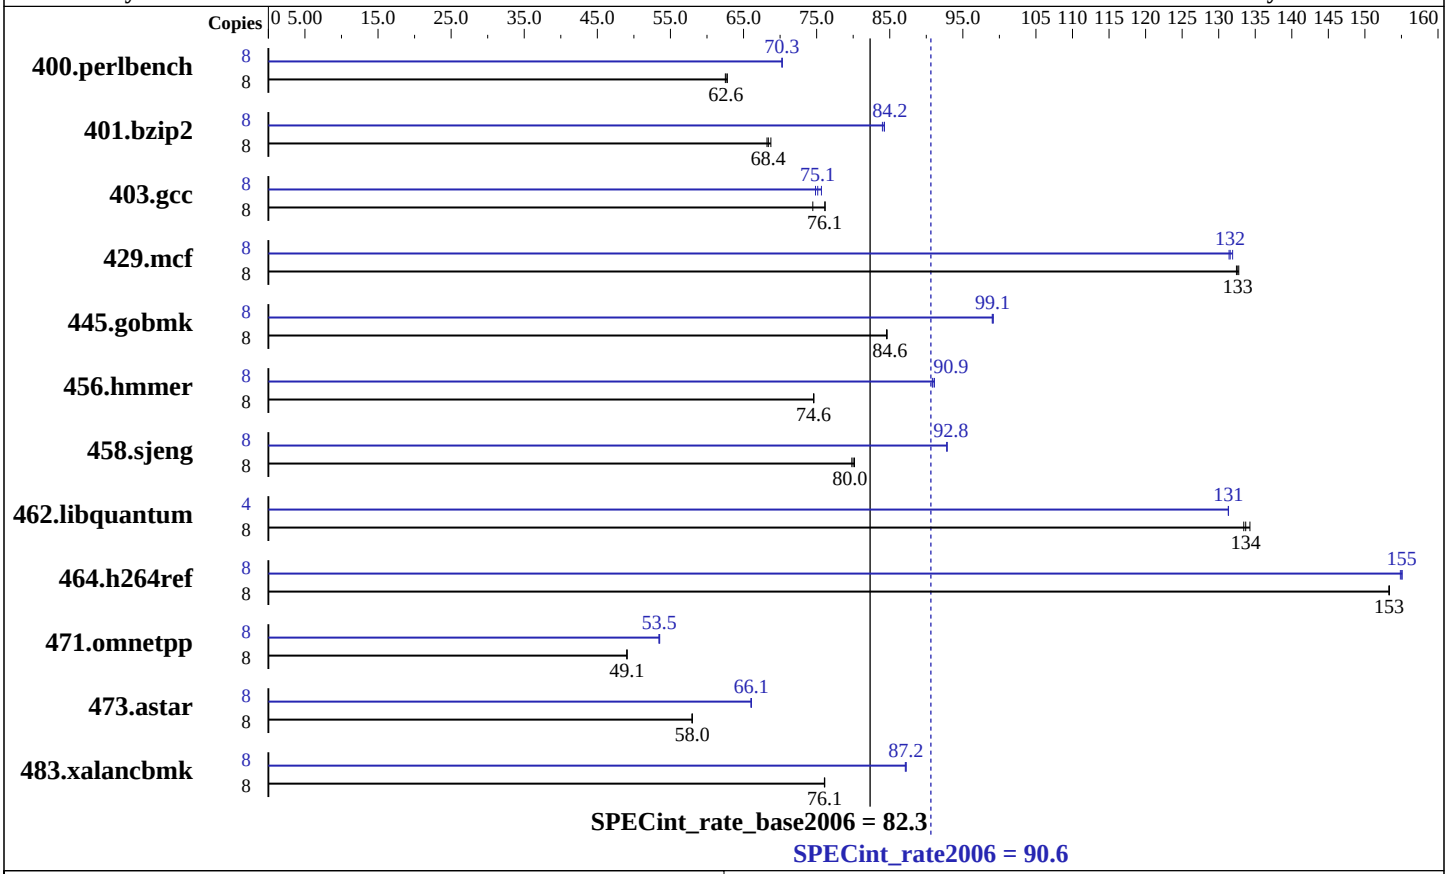

Hardware

CPU Name:	POWER6
CPU Characteristics:	
CPU MHz:	4200
FPU:	Integrated
CPU(s) enabled:	4 cores, 2 chips, 2 cores/chip, 2 threads/core
CPU(s) orderable:	2,4 cores
Primary Cache:	64 KB I + 64 KB D on chip per core
Secondary Cache:	4 MB I+D on chip per core
L3 Cache:	None
Other Cache:	None
Memory:	32 GB (8x4 GB) DDR2 667 MHz
Disk Subsystem:	2x73 GB SAS 15K RPM
Other Hardware:	None

Software

Operating System:	IBM AIX V6.1 Updated to SP3
Compiler:	XL C/C++ Enterprise Edition V9 for AIX Updated with the Oct2007 PTF.
Auto Parallel:	No
File System:	AIX/JFS2
System State:	Multi-user
Base Pointers:	32-bit
Peak Pointers:	32/64-bit
Other Software:	--

SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

Bull Escala PL460 (4.2 GHz, 4 cores)

SPECint_rate2006 = 90.6

SPECint_rate_base2006 = 82.3

CPU2006 license: 20
Test sponsor: Bull SAS
Tested by: Bull SAS

Test date: Feb-2008
Hardware Availability: Mar-2008
Software Availability: Feb-2008

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	8	**1248**	**62.6**	1245	62.8	1250	62.5	8	**1112**	**70.3**	1113	70.3	1112	70.3
401.bzip2	8	1123	68.7	1132	68.2	**1129**	**68.4**	8	**916**	**84.2**	919	84.0	916	84.3
403.gcc	8	865	74.5	**846**	**76.1**	845	76.2	8	851	75.7	860	74.8	**857**	**75.1**
429.mcf	8	550	133	551	132	**550**	**133**	8	553	132	555	131	**555**	**132**
445.gobmk	8	991	84.6	**992**	**84.6**	992	84.6	8	**847**	**99.1**	847	99.0	846	99.2
456.hmmer	8	1000	74.6	**1001**	**74.6**	1001	74.6	8	**821**	**90.9**	822	90.8	819	91.1
458.sjeng	8	**1210**	**80.0**	1207	80.2	1213	79.8	8	1043	92.8	**1043**	**92.8**	1043	92.8
462.libquantum	8	1235	134	**1240**	**134**	1242	133	4	631	131	631	131	**631**	**131**
464.h264ref	8	1154	153	1155	153	**1155**	**153**	8	**1142**	**155**	1141	155	1143	155
471.omnetpp	8	**1019**	**49.1**	1019	49.0	1019	49.1	8	934	53.5	**935**	**53.5**	936	53.4
473.astar	8	969	58.0	968	58.0	**969**	**58.0**	8	850	66.1	851	66.0	**850**	**66.1**
483.xalancbmk	8	726	76.1	725	76.1	**726**	**76.1**	8	634	87.1	633	87.2	**633**	**87.2**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

General Notes

```
See flags file of details on following settings.
all ulimits set to unlimited.
Envionment variables set before executing benchmarks:
  MALLOCOPTIONS=pool
  MEMORY_AFFINITY=MCM
  XLFRTEOPTS=intrinthds=1
System set to "Enhanced" mode when defining partition on HMC.
bindprocessor command used on submit to bind each copy to a
  unique processor.
1000 16M large pages defined with vmo command
Remote console disabled in /etc/inittab.
fdpr binary optimization tool used for:
  400.perlbench 401.bzip2 403.gcc 429.mcf 456.hmmer
  458.sjent 462.libquantum 464.h264ref 473.astar
```

Base Compiler Invocation

C benchmarks:

```
/usr/vac/bin/xlc -qlanglvl=extc99
```

C++ benchmarks:

```
/usr/vacpp/bin/xlC
```

Base Portability Flags

400.perlbench: -DSPEC_CPU_AIX
462.libquantum: -DSPEC_CPU_AIX
464.h264ref: -DSPEC_CPU_AIX -qchars=signed
483.xalancbmk: -DSPEC_CPU_AIX

Base Optimization Flags

C benchmarks:
-bmaxdata:0x50000000 -O5 -qlargepage -D_ILS_MACROS -qalias=noansi -qalloca -blpdata

C++ benchmarks:
-bmaxdata:0x20000000 -O5 -qlargepage -D_ILS_MACROS -qrtti=all -blpdata

Base Other Flags

C benchmarks:
-qipa=noobject -qipa=threads -qsuppress=1500-036

C++ benchmarks:
-qipa=noobject -qipa=threads -qsuppress=1500-036

Peak Compiler Invocation

C benchmarks:
/usr/vac/bin/xlc -qlanglvl=extc99

C++ benchmarks:
/usr/vacpp/bin/xlC

Peak Portability Flags

400.perlbench: -DSPEC_CPU_AIX
403.gcc: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_AIX
464.h264ref: -DSPEC_CPU_AIX -qchars=signed
483.xalancbmk: -DSPEC_CPU_AIX

Peak Optimization Flags

C benchmarks:

400.perlbench: -bmaxdata:0x50000000 -qpdf1(pass 1) -qpdf2(pass 2) -O4 -qlargepage -qenablevmx -qvecnvol -D_ILS_MACROS -qalias=noansi -qfdpr -blpdata

401.bzip2: -bmaxdata:0x4ffffffc -qpdf1(pass 1) -qpdf2(pass 2) -O5 -qlargepage -qenablevmx -qvecnvol -D_ILS_MACROS -qfdpr -blpdata

403.gcc: -qpdf1(pass 1) -qpdf2(pass 2) -O4 -qlargepage -D_ILS_MACROS -qalloca -qfdpr -q64 -blpdata

429.mcf: -bmaxdata:0x50000000 -O5 -qlargepage -qenablevmx -qvecnvol -D_ILS_MACROS -qfdpr -blpdata

445.gobmk: -qpdf1(pass 1) -qpdf2(pass 2) -O4 -qlargepage -qenablevmx -qvecnvol -D_ILS_MACROS -blpdata

456.hmmer: -O5 -qlargepage -D_ILS_MACROS -qfdpr -blpdata

458.sjeng: -qpdf1(pass 1) -qpdf2(pass 2) -O5 -qlargepage -qenablevmx -qvecnvol -D_ILS_MACROS -qfdpr -blpdata

462.libquantum: -qpdf1(pass 1) -qpdf2(pass 2) -O5 -qlargepage -qenablevmx -qvecnvol -D_ILS_MACROS -q64 -qfdpr -blpdata

464.h264ref: -qpdf1(pass 1) -qpdf2(pass 2) -O5 -q64 -D_ILS_MACROS -qenablevmx -qvecnvol -qfdpr -bdatapsize:64K -bstackpsize:64K -btextpsize:64K

C++ benchmarks:

471.omnetpp: -bmaxdata:0x20000000 -qpdf1(pass 1) -qpdf2(pass 2) -O5 -qlargepage -qenablevmx -qvecnvol -D_ILS_MACROS -qalign=natural -qrtti=all -qinlglue -blpdata

473.astar: -bmaxdata:0x20000000 -qpdf1(pass 1) -qpdf2(pass 2) -O5 -qlargepage -D_ILS_MACROS -qfdpr -qinlglue -qalign=natural -blpdata

483.xalancbmk: -bmaxdata:0x20000000 -qpdf1(pass 1) -qpdf2(pass 2) -O5 -qlargepage -D_ILS_MACROS -qinlglue -D__IBM_FAST_VECTOR -blpdata

Peak Other Flags

C benchmarks:
```
-qipa=noobject -qipa=threads -qsuppress=1500-036
```

C++ benchmarks:
```
-qipa=noobject -qipa=threads -qsuppress=1500-036
```

The flags file that was used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/CPU2006_flags.20090713.06.html

You can also download the XML flags source by saving the following link:
http://www.spec.org/cpu2006/flags/CPU2006_flags.20090713.06.xml

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Jul 22 18:24:39 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 15 April 2008.