SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

PRIMERGY RX100 S5, Intel Xeon X3350, 2.66 GHz

SPECint®_rate2006 = 71.6

SPECint_rate_base2006 = 61.3

CPU2006 license: 22
Test sponsor: Fujitsu Siemens Computers
Tested by: Fujitsu Siemens Computers

Test date: Feb-2008
Hardware Availability: Mar-2008
Software Availability: Nov-2007

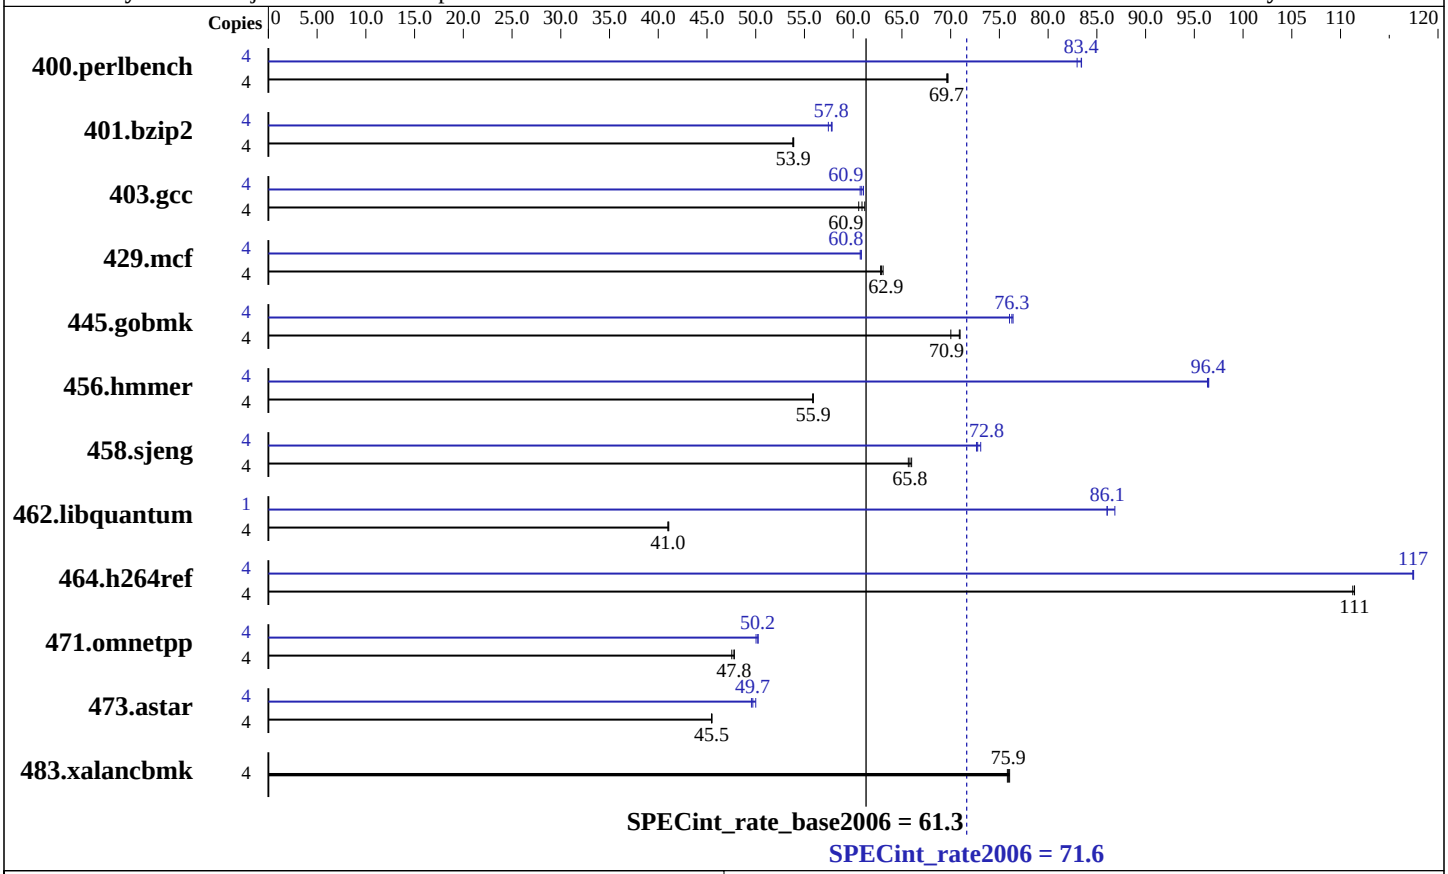

Hardware

CPU Name:	Intel Xeon X3350
CPU Characteristics:	1333 MHz system bus
CPU MHz:	2667
FPU:	Integrated
CPU(s) enabled:	4 cores, 1 chip, 4 cores/chip
CPU(s) orderable:	1 chip
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	12 MB I+D on chip per chip, 6 MB shared / 2 cores
L3 Cache:	None
Other Cache:	None
Memory:	8 GB (4x2 GB PC2-6400E, 2 rank, CAS 6-6-6, with ECC)
Disk Subsystem:	Western Digital WD5000AAKS (SATA, 500GB, 7200rpm)
Other Hardware:	None

Software

Operating System:	SUSE Linux Enterprise Server 10 (x86_64) SP1, Kernel 2.6.16.46-0.12-smp
Compiler:	Intel C++ Compiler for Linux32 and Linux64 Version 10.1 - Build 20070725
Auto Parallel:	Yes
File System:	ext2
System State:	Multiuser, Runlevel 3
Base Pointers:	32-bit
Peak Pointers:	32/64-bit
Other Software:	MicroQuill SmartHeap Library, Version 8.1 binutils-2.17.tar.gz, Version 2.17

SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

PRIMERGY RX100 S5, Intel Xeon X3350, 2.66 GHz

SPECint_rate2006 = 71.6

SPECint_rate_base2006 = 61.3

CPU2006 license: 22
Test sponsor: Fujitsu Siemens Computers
Tested by: Fujitsu Siemens Computers

Test date: Feb-2008
Hardware Availability: Mar-2008
Software Availability: Nov-2007

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	4	561	69.6	**561**	**69.7**	560	69.7	4	471	83.0	**469**	**83.4**	468	83.4
401.bzip2	4	**717**	**53.9**	716	53.9	717	53.8	4	672	57.5	**668**	**57.8**	667	57.8
403.gcc	4	526	61.2	532	60.6	**529**	**60.9**	4	**529**	**60.9**	527	61.1	530	60.7
429.mcf	4	**580**	**62.9**	578	63.1	581	62.8	4	601	60.7	**600**	**60.8**	600	60.8
445.gobmk	4	**592**	**70.9**	591	71.0	599	70.0	4	**550**	**76.3**	549	76.4	552	76.0
456.hmmer	4	**668**	**55.9**	668	55.9	668	55.8	4	**387**	**96.4**	387	96.5	387	96.4
458.sjeng	4	733	66.0	737	65.7	**735**	**65.8**	4	**665**	**72.8**	662	73.1	666	72.7
462.libquantum	4	**2021**	**41.0**	2022	41.0	2017	41.1	1	239	86.8	241	86.0	**241**	**86.1**
464.h264ref	4	**794**	**111**	796	111	794	111	4	**754**	**117**	753	118	754	117
471.omnetpp	4	**523**	**47.8**	526	47.5	523	47.8	4	**498**	**50.2**	500	50.0	497	50.3
473.astar	4	617	45.5	**618**	**45.5**	618	45.5	4	562	50.0	**565**	**49.7**	567	49.6
483.xalancbmk	4	363	76.0	364	75.8	**364**	**75.9**	4	363	76.0	364	75.8	**364**	**75.9**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

'OMP_NUM_THREADS' set to number of cores (default)

General Notes

This result has been produced with binaries provided and compiled by Intel.

All binaries were built with 32-bit Intel compiler except:
401.bzip2 and 456.hmmer in peak were built with 64-bit Intel
compiler by changing the path for include and library files.

BIOS configuration:
Hardware Prefetch = Disable, Adjacent Sector Prefetch = Disable

For information about Fujitsu Siemens Computers please see:
http://www.fujitsu-siemens.com

Base Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
-fast -inline-calloc -opt-malloc-options=3

C++ benchmarks:
-xT -ipo -O3 -no-prec-div -Wl,-z,muldefs
-L/home/cmplr/usr3/alrahate/cpu2006.1.0/lib -lsmartheap

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):
icc

401.bzip2: /home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux64/bin/icc
-L/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux64/lib
-I/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux64/include

456.hmmer: /home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux64/bin/icc
-L/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux64/lib
-I/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux64/include

C++ benchmarks:
icpc

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
401.bzip2: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LINUX

Continued on next page

Peak Portability Flags (Continued)

483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -prof-gen(pass 1) -prof-use(pass 2) -fast -ansi-alias -prefetch

401.bzip2: -prof-gen(pass 1) -prof-use(pass 2) -fast -prefetch

403.gcc: -fast -inline-calloc -opt-malloc-options=3

429.mcf: -fast -prefetch

445.gobmk: -prof-gen(pass 1) -prof-use(pass 2) -xT -O2 -ipo -no-prec-div -ansi-alias

456.hmmer: -fast -unroll2 -ansi-alias -opt-multi-version-aggressive

458.sjeng: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll4

462.libquantum: -fast -unroll4 -Ob0 -prefetch -opt-streaming-stores always -vec-guard-write -opt-malloc-options=3 -parallel -par-runtime-control

464.h264ref: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -prof-gen(pass 1) -prof-use(pass 2) -xT -O3 -ipo -no-prec-div -ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs -L/home/cmplr/usr3/alrahate/cpu2006.1.0/lib -lsmartheap

473.astar: -prof-gen(pass 1) -prof-use(pass 2) -xT -O3 -ipo -no-prec-div -ansi-alias -opt-ra-region-strategy=routine -Wl,-z,muldefs -L/home/cmplr/usr3/alrahate/cpu2006.1.0/lib -lsmartheap

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

The flags file that was used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/Intel-ic10.1-INT-ia32-linux-flags.20090713.02.html`

You can also download the XML flags source by saving the following link:
`http://www.spec.org/cpu2006/flags/Intel-ic10.1-INT-ia32-linux-flags.20090713.02.xml`

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Jul 22 18:20:58 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 15 April 2008.