



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM BladeCenter JS12 Express (3.8 GHz, 2 core, RedHat)

SPECfp[®]_rate2006 = 42.5

SPECfp_rate_base2006 = 36.2

CPU2006 license: 11


Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Feb-2008

Hardware Availability: May-2008

Software Availability: Nov-2007

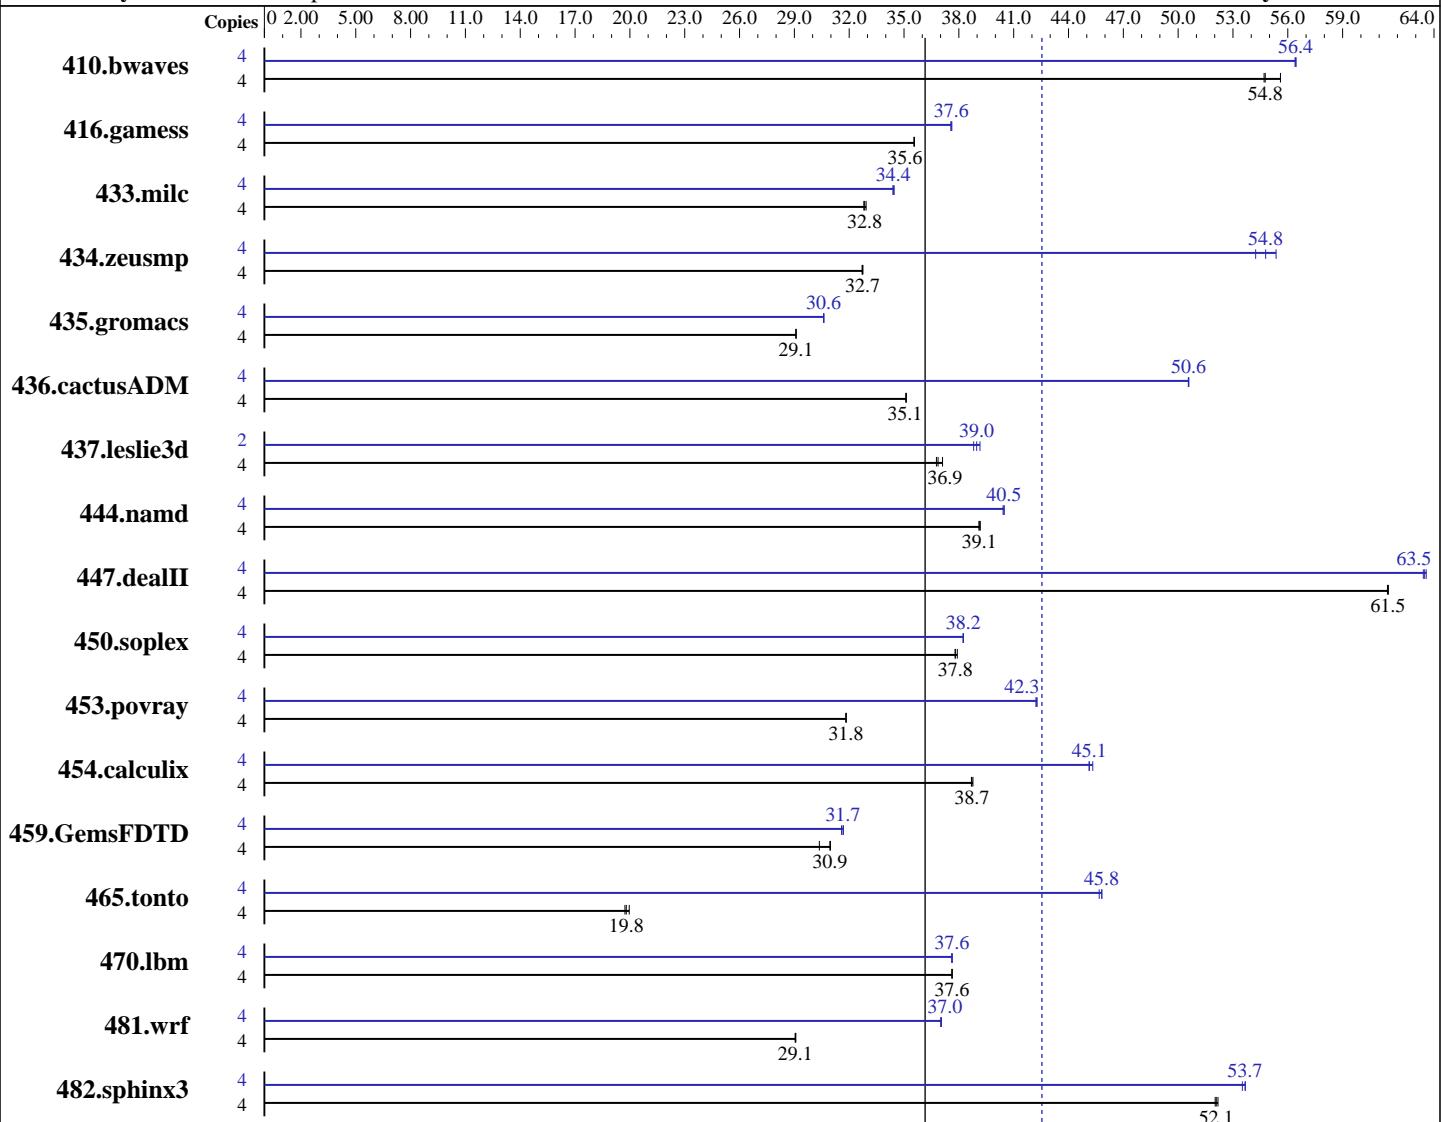

SPECfp_rate_base2006 = 36.2

SPECfp_rate2006 = 42.5

Hardware

CPU Name: POWER6
CPU Characteristics:
CPU MHz:
FPU:
CPU(s) enabled:
CPU(s) orderable:
Primary Cache:
Secondary Cache:

POWER6
3800
Integrated
2 cores, 1 chip, 2 cores/chip, 2 threads/core
2 cores
64 KB I + 64 KB D on chip per core
4 MB I+D on chip per core

Software

Operating System: Red Hat Enterprise Linux Advanced Platform 5.1 for IBM POWER
Compiler: IBM XL C/C++ Advanced Edition for Linux, V9.0
IBM XL Fortran Advanced Edition for Linux, V11.1
Auto Parallel: No
File System: ext3
System State: Multi-User
Base Pointers: 32-bit
Peak Pointers: 32/64-bit

Continued on next page

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM BladeCenter JS12 Express (3.8 GHz, 2 core, RedHat)

SPECfp_rate2006 = 42.5

SPECfp_rate_base2006 = 36.2

CPU2006 license: 11

Test date: Feb-2008

Test sponsor: IBM Corporation

Hardware Availability: May-2008

Tested by: IBM Corporation

Software Availability: Nov-2007

L3 Cache: None
 Other Cache: None
 Memory: 32 GB (8x4 GB) DDR2 667 MHz
 Disk Subsystem: 1x73 GB SAS 15K RPM
 Other Hardware: None

Other Software:

-IBM Post-Link Optimization for Linux on POWER, Version 5.4.0-17
 -MicroQuill SmartHeap 8.1
 -IBM Engineering and Scientific Subroutine Library for Linux on POWER, Version 4.3

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	4	978	55.6	993	54.8	994	54.7	4	964	56.4	963	56.4	963	56.5
416.gamess	4	2203	35.6	2203	35.6	2202	35.6	4	2084	37.6	2082	37.6	2085	37.6
433.milc	4	1115	32.9	1120	32.8	1118	32.8	4	1065	34.5	1067	34.4	1068	34.4
434.zeusmp	4	1113	32.7	1112	32.7	1112	32.7	4	664	54.8	671	54.2	658	55.4
435.gromacs	4	982	29.1	982	29.1	982	29.1	4	933	30.6	933	30.6	933	30.6
436.cactusADM	4	1361	35.1	1361	35.1	1362	35.1	4	945	50.6	945	50.6	945	50.6
437.leslie3d	4	1013	37.1	1022	36.8	1020	36.9	2	480	39.2	482	39.0	484	38.8
444.namd	4	820	39.1	819	39.2	820	39.1	4	793	40.5	794	40.4	793	40.5
447.dealII	4	745	61.5	744	61.5	744	61.5	4	722	63.4	720	63.6	721	63.5
450.soplex	4	880	37.9	882	37.8	883	37.8	4	872	38.3	872	38.2	872	38.2
453.povray	4	668	31.8	669	31.8	669	31.8	4	503	42.3	503	42.3	504	42.2
454.calculix	4	851	38.8	852	38.7	853	38.7	4	728	45.3	731	45.1	731	45.1
459.GemsFDTD	4	1398	30.4	1372	30.9	1370	31.0	4	1340	31.7	1344	31.6	1339	31.7
465.tonto	4	1988	19.8	1971	20.0	1995	19.7	4	862	45.7	859	45.8	859	45.8
470.lbm	4	1461	37.6	1461	37.6	1460	37.6	4	1460	37.6	1461	37.6	1461	37.6
481.wrf	4	1538	29.1	1538	29.0	1536	29.1	4	1207	37.0	1206	37.1	1207	37.0
482.sphinx3	4	1498	52.0	1497	52.1	1494	52.2	4	1453	53.7	1453	53.7	1457	53.5

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

General Notes

kernel release 2.6.18-53.el5.

See flags file for details on following settings.

ulimit -s (stack) set to 262144.

Approved srcalt wrfv22 used for 481.wrf

Large pages reserved as follows by root user:

```
echo 265 > /proc/sys/vm/nr_hugepages
```

System configured with libhugetlbfs library for application access to large pages
 Environment variables set before executing benchmarks.

```
export HUGETLB_VERBOSE=0
export HUGETLB_MORECORE=yes
```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM BladeCenter JS12 Express (3.8 GHz, 2 core,
RedHat)

SPECfp_rate2006 = 42.5

SPECfp_rate_base2006 = 36.2

CPU2006 license: 11

Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Feb-2008

Hardware Availability: May-2008

Software Availability: Nov-2007

General Notes (Continued)

```
export XLF RTEOPTS=intrinthds=1
```

IBM Post-Link optimization tool used for
433.milc 435.gromacs 436.cactusADM 453.povray 465.tonto 482.sphinx3

Benchmarks bound to a processor using numactl on the submit command.

Base Compiler Invocation

C benchmarks:

```
xlc -qlanglvl=extc99
```

C++ benchmarks:

```
xlc
```

Fortran benchmarks:

```
xlf95
```

Benchmarks using both Fortran and C:

```
xlc -qlanglvl=extc99 xlf95
```

Base Portability Flags

```
410.bwaves: -qfixed
416.gamess: -qfixed
434.zeusmp: -qfixed
435.gromacs: -qfixed -qextname
436.cactusADM: -qfixed -qextname
437.leslie3d: -qfixed
454.calculix: -qfixed -qextname
481.wrf: -DNOUNDERSCORE
482.sphinx3: -qchars=signed
```

Base Optimization Flags

C benchmarks:

```
-O5 -qnoenablevmx -lhugetlbfs
```

C++ benchmarks:

```
-O5 -qrtti -qnoenablevmx -qstaticlink
```

Fortran benchmarks:

```
-O5 -qsmalstack=dynlenonheap -qalias=nostd -qnoenablevmx
-B/usr/share/libhugetlbfs/ -tl -Wl,--hugetlbfs-link=BDT
```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM BladeCenter JS12 Express (3.8 GHz, 2 core,
RedHat)

SPECfp_rate2006 = 42.5

SPECfp_rate_base2006 = 36.2

CPU2006 license: 11

Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Feb-2008

Hardware Availability: May-2008

Software Availability: Nov-2007

Base Optimization Flags (Continued)

Benchmarks using both Fortran and C:

```
-O5 -qnoenablevmx -qsmalstack=dynlenonheap -qalias=nostd  
-B/usr/share/libhugetlbfs/ -tl -Wl,--hugetlbfs-link=BDT
```

Base Other Flags

C benchmarks:

```
-qipa=noobject -qipa=threads
```

C++ benchmarks:

```
-qipa=noobject -qipa=threads
```

Fortran benchmarks:

```
-qipa=noobject -qipa=threads
```

Benchmarks using both Fortran and C:

```
-qipa=noobject -qipa=threads
```

Peak Compiler Invocation

C benchmarks:

```
xlc -qlanglvl=extc99
```

C++ benchmarks:

```
xlc
```

Fortran benchmarks:

```
xlf95
```

Benchmarks using both Fortran and C:

```
xlc -qlanglvl=extc99 xlf95
```

Peak Portability Flags

```
410.bwaves: -qfixed  
416.gamess: -qfixed  
434.zeusmp: -qfixed  
435.gromacs: -qfixed -qextname  
436.cactusADM: -qfixed -qextname  
437.leslie3d: -qfixed  
454.calculix: -qfixed -qextname  
481.wrf: -DNOUNDERSCORE  
482.sphinx3: -qchars=signed
```



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM BladeCenter JS12 Express (3.8 GHz, 2 core, RedHat)

SPECfp_rate2006 = 42.5

SPECfp_rate_base2006 = 36.2

CPU2006 license: 11

Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Feb-2008

Hardware Availability: May-2008

Software Availability: Nov-2007

Peak Optimization Flags

C benchmarks:

```
433.milc: -Wl,-q -qpdf1(pass 1) -qpdf2(pass 2) -O5 -qnoenablevmx
           -lhugetlbfss
```

```
470.lbm: -O3 -qarch=pwr6e -qtune=pwr6 -B/usr/share/libhugetlbfss/
          -tl -Wl,--hugetlbfss-link=BDT -q64
```

```
482.sphinx3: -Wl,-q -qpdf1(pass 1) -qpdf2(pass 2) -O4 -lhugetlbfss
```

C++ benchmarks:

```
444.namd: -qpdf1(pass 1) -qpdf2(pass 2) -O3 -qarch=pwr6e -qtune=pwr6
```

```
447.dealII: -O5 -qrtti -qnoenablevmx -qstaticlink
             -Wl,--whole-archive /usr/lib/libsmartheap.a
             -Wl,--no-whole-archive
```

```
450.soplex: -qpdf1(pass 1) -qpdf2(pass 2) -O4 -qstrict -lhugetlbfss
```

```
453.povray: -Wl,-q -qpdf1(pass 1) -qpdf2(pass 2) -O5 -lsmartheap
```

Fortran benchmarks:

```
410.bwaves: -O5 -qsmallstack=dynlenonheap -lhugetlbfss
```

```
416.gamess: -qpdf1(pass 1) -qpdf2(pass 2) -O5 -qalias=nostd
             -qnoenablevmx
```

```
434.zeusmp: -qpdf1(pass 1) -qpdf2(pass 2) -O3 -qarch=pwr6e -qtune=pwr6
             -qxlf90=nosignedzero -B/usr/share/libhugetlbfss/ -tl
             -Wl,--hugetlbfss-link=BDT
```

```
437.leslie3d: -O3 -qarch=pwr6e -qtune=pwr6 -B/usr/share/libhugetlbfss/
               -tl -Wl,--hugetlbfss-link=BDT -q64
```

```
459.GemsFDTD: -qpdf1(pass 1) -qpdf2(pass 2) -O5
                 -B/usr/share/libhugetlbfss/ -tl -Wl,--hugetlbfss-link=BDT
                 -q64
```

```
465.tonto: -Wl,-q -qpdf1(pass 1) -qpdf2(pass 2) -O5 -lessl
            -lsmartheap -lxlf90_r
```

Benchmarks using both Fortran and C:

```
435.gromacs: -Wl,-q -O2 -qarch=pwr6e -qtune=pwr6 -lhugetlbfss
```

```
436.cactusADM: -Wl,-q -qpdf1(pass 1) -qpdf2(pass 2) -O2 -qarch=pwr6e
                  -qtune=pwr6 -qnostrict -lhugetlbfss
```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM BladeCenter JS12 Express (3.8 GHz, 2 core,
RedHat)

SPECfp_rate2006 = 42.5

SPECfp_rate_base2006 = 36.2

CPU2006 license: 11

Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Feb-2008

Hardware Availability: May-2008

Software Availability: Nov-2007

Peak Optimization Flags (Continued)

454.calculix: -qpdf1(pass 1) -qpdf2(pass 2) -O4
-B/usr/share/libhugetlbfs/ -tl -Wl,--hugetlbfs-link=BDT

481.wrf: -O5 -qnoenablevmx -qsmallstack=dynlenonheap -lhugetlbfs

Peak Other Flags

C benchmarks:

-qipa=noobject -qipa=threads

C++ benchmarks:

-qipa=noobject -qipa=threads

Fortran benchmarks:

-qipa=noobject -qipa=threads

Benchmarks using both Fortran and C:

-qipa=noobject -qipa=threads

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/IBM-Linux-XL.20090714.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/IBM-Linux-XL.20090714.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.

Report generated on Tue Jul 22 16:46:08 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 29 April 2008.