



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp®\_rate2006 = 84.1

PowerEdge T605 (AMD Opteron 2352, 2.10 GHz)

SPECfp\_rate\_base2006 = 76.7

CPU2006 license: 55


Test date: Mar-2008

Test sponsor: Dell Inc.

Hardware Availability: Apr-2008

Tested by: Dell Inc.

Software Availability: May-2008

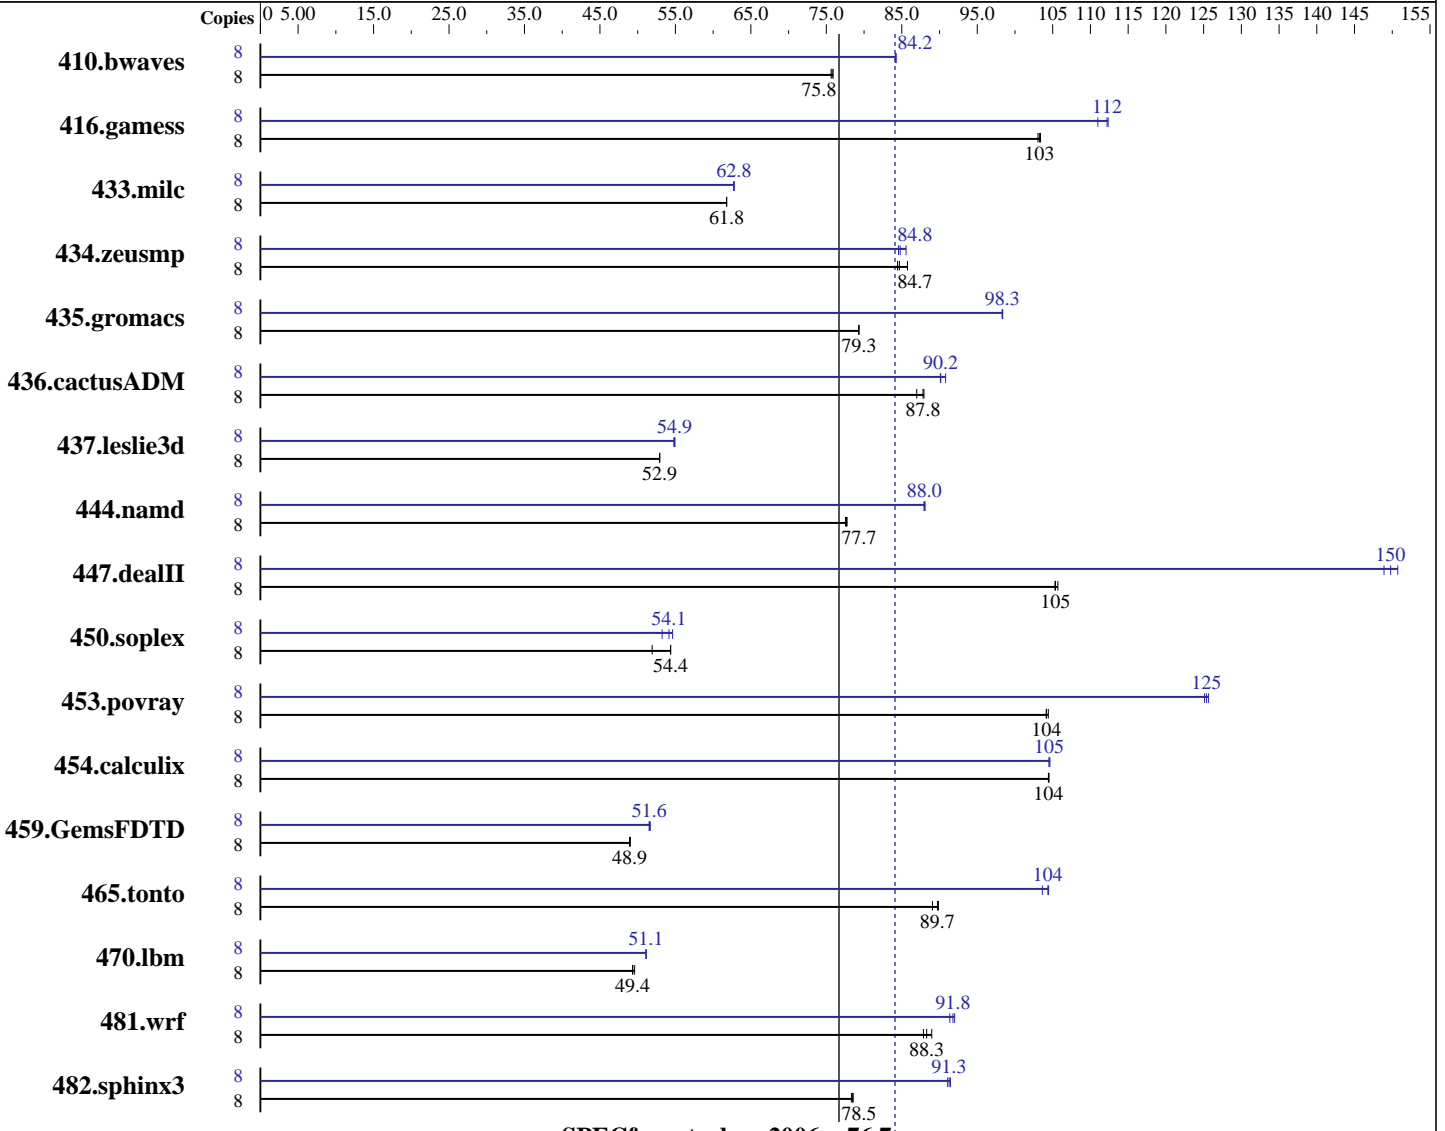

SPECfp\_rate\_base2006 = 76.7

SPECfp\_rate2006 = 84.1

### Hardware

CPU Name: AMD Opteron 2352  
 CPU Characteristics: 2100  
 CPU MHz: Integrated  
 FPU: 8 cores, 2 chips, 4 cores/chip  
 CPU(s) enabled: 1,2 chips  
 CPU(s) orderable: 64 KB I + 64 KB D on chip per core  
 Primary Cache: 512 KB I+D on chip per core  
 Secondary Cache:

Continued on next page

### Software

Operating System: SuSE Linux Enterprise Server 10 (x86\_64) SP1, Kernel 2.6.16.46-0.12-smp  
 Compiler: PGI Server Complete Version 7.2 PathScale Compiler Suite Version 3.1  
 Auto Parallel: No  
 File System: ReiserFS  
 System State: Run Level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp\_rate2006 = 84.1

PowerEdge T605 (AMD Opteron 2352, 2.10 GHz)

SPECfp\_rate\_base2006 = 76.7

CPU2006 license: 55

Test date: Mar-2008

Test sponsor: Dell Inc.

Hardware Availability: Apr-2008

Tested by: Dell Inc.

Software Availability: May-2008

L3 Cache: 2 MB I+D on chip per chip  
Other Cache: None  
Memory: 16 GB (4 x 4 GB, DDR2-667, CL5, Reg, Dual Rank)  
Disk Subsystem: 2 x 250 GB 7200 RPM SATA (RAID 0)  
Other Hardware: None

Other Software: None

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	8	1437	75.6	1432	75.9	<b>1435</b>	<b>75.8</b>	8	<b>1291</b>	<b>84.2</b>	1292	84.1	1290	84.3
416.gamess	8	<b>1517</b>	<b>103</b>	1520	103	1515	103	8	1411	111	<b>1396</b>	<b>112</b>	1394	112
433.milc	8	<b>1189</b>	<b>61.8</b>	1189	61.8	1189	61.8	8	1170	62.8	1171	62.7	<b>1170</b>	<b>62.8</b>
434.zeusmp	8	<b>860</b>	<b>84.7</b>	862	84.4	849	85.8	8	<b>859</b>	<b>84.8</b>	851	85.6	861	84.6
435.gromacs	8	<b>720</b>	<b>79.3</b>	720	79.3	720	79.3	8	581	98.4	581	98.3	<b>581</b>	<b>98.3</b>
436.cactusADM	8	1099	87.0	1087	87.9	<b>1089</b>	<b>87.8</b>	8	1053	90.8	1061	90.1	<b>1060</b>	<b>90.2</b>
437.leslie3d	8	1421	52.9	<b>1421</b>	<b>52.9</b>	1422	52.9	8	1373	54.8	1369	54.9	<b>1370</b>	<b>54.9</b>
444.namd	8	827	77.5	<b>826</b>	<b>77.7</b>	825	77.7	8	729	88.0	<b>729</b>	<b>88.0</b>	728	88.1
447.dealII	8	866	106	869	105	<b>869</b>	<b>105</b>	8	607	151	<b>611</b>	<b>150</b>	615	149
450.soplex	8	1285	51.9	1227	54.4	<b>1228</b>	<b>54.4</b>	8	1253	53.2	<b>1232</b>	<b>54.1</b>	1221	54.6
453.povray	8	408	104	409	104	<b>409</b>	<b>104</b>	8	<b>339</b>	<b>125</b>	339	126	340	125
454.calculix	8	631	105	632	104	<b>632</b>	<b>104</b>	8	631	105	<b>631</b>	<b>105</b>	631	105
459.GemsFDTD	8	1735	48.9	<b>1734</b>	<b>48.9</b>	1731	49.0	8	1643	51.7	<b>1646</b>	<b>51.6</b>	1648	51.5
465.tonto	8	<b>877</b>	<b>89.7</b>	884	89.1	876	89.9	8	754	104	760	104	<b>754</b>	<b>104</b>
470.lbm	8	2216	49.6	2229	49.3	<b>2227</b>	<b>49.4</b>	8	2150	51.1	2151	51.1	<b>2151</b>	<b>51.1</b>
481.wrf	8	1004	89.0	<b>1012</b>	<b>88.3</b>	1017	87.9	8	<b>974</b>	<b>91.8</b>	971	92.0	978	91.4
482.sphinx3	8	1991	78.3	1985	78.6	<b>1987</b>	<b>78.5</b>	8	1712	91.1	<b>1708</b>	<b>91.3</b>	1705	91.5

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

```
'numactl' was used to bind copies to the cores
Environment variable PGI_HUGE_PAGES set to 150
'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2457600' was used to set environment locked pages in memory quantity
Set /proc/sys/vm/nr_hugepages=1200
mount -t hugetlbfs nodev /mnt/hugepages
```

## Base Compiler Invocation

C benchmarks:  
pgcc

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp\_rate2006 = 84.1

PowerEdge T605 (AMD Opteron 2352, 2.10 GHz)

SPECfp\_rate\_base2006 = 76.7

CPU2006 license: 55

Test date: Mar-2008

Test sponsor: Dell Inc.

Hardware Availability: Apr-2008

Tested by: Dell Inc.

Software Availability: May-2008

## Base Compiler Invocation (Continued)

C++ benchmarks:

pgcpp

Fortran benchmarks:

pgf95

Benchmarks using both Fortran and C:

pgcc pgf95

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -Mnomain  
436.cactusADM: -DSPEC\_CPU\_LP64 -Mnomain  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -Mnomain  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:

-fast -Mipa=jobs:4 -Mipa=fast -Mipa=inline -Mfprelaxed  
-Msmartalloc=huge:150 -tp barcelona-64 -Bstatic\_pgi

C++ benchmarks:

-fast -Mipa=jobs:4 -Mipa=fast -Mipa=inline -Mfprelaxed  
-Msmartalloc=huge:150 --zc\_eh -tp barcelona-64 -Bstatic\_pgi

Fortran benchmarks:

-fast -Mipa=jobs:4 -Mipa=fast -Mipa=inline -Mfprelaxed  
-Msmartalloc=huge:150 -tp barcelona-64 -Bstatic\_pgi

Benchmarks using both Fortran and C:

-fast -Mipa=jobs:4 -Mipa=fast -Mipa=inline -Mfprelaxed  
-Msmartalloc=huge:150 -tp barcelona-64 -Bstatic\_pgi



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp\_rate2006 = 84.1

PowerEdge T605 (AMD Opteron 2352, 2.10 GHz)

SPECfp\_rate\_base2006 = 76.7

CPU2006 license: 55

Test date: Mar-2008

Test sponsor: Dell Inc.

Hardware Availability: Apr-2008

Tested by: Dell Inc.

Software Availability: May-2008

## Base Other Flags

C benchmarks:

-w

C++ benchmarks:

-w

Fortran benchmarks:

-w

Benchmarks using both Fortran and C:

-w

## Peak Compiler Invocation

C benchmarks (except as noted below):

pathcc

433.milc: pgcc

C++ benchmarks (except as noted below):

pathCC

444.namd: pgcpp

Fortran benchmarks (except as noted below):

pathf95

410.bwaves: pgf95

434.zeusmp: pgf95

Benchmarks using both Fortran and C (except as noted below):

pgcc pgf95

436.cactusADM: pathcc pathf95

481.wrf: pathcc pathf95

## Peak Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64

416.gamess: -DSPEC\_CPU\_LP64

433.milc: -DSPEC\_CPU\_LP64

434.zeusmp: -DSPEC\_CPU\_LP64

435.gromacs: -DSPEC\_CPU\_LP64 -Mnomain

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/

Page 4



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp\_rate2006 = 84.1

PowerEdge T605 (AMD Opteron 2352, 2.10 GHz)

SPECfp\_rate\_base2006 = 76.7

CPU2006 license: 55

Test date: Mar-2008

Test sponsor: Dell Inc.

Hardware Availability: Apr-2008

Tested by: Dell Inc.

Software Availability: May-2008

## Peak Portability Flags (Continued)

436.cactusADM: -DSPEC\_CPU\_LP64 -fno-second-underscore  
 437.leslie3d: -DSPEC\_CPU\_LP64  
 444.namd: -DSPEC\_CPU\_LP64  
 453.povray: -DSPEC\_CPU\_LP64  
 454.calculix: -DSPEC\_CPU\_LP64 -Mnomain  
 459.GemsFDTD: -DSPEC\_CPU\_LP64  
 465.tonto: -DSPEC\_CPU\_LP64  
 470.lbm: -DSPEC\_CPU\_LP64  
 481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX -fno-second-underscore  
 482.sphinx3: -DSPEC\_CPU\_LP64

## Peak Optimization Flags

### C benchmarks:

433.milc: -fastsse -Msmartalloc=huge:150 -Msafeptr -Mfprelaxed  
 -Mipa=jobs:4 -Mipa=inline -Mipa=arg -Mipa=const -Mipa=ptr  
 -Mipa=shape -tp barcelona-64 -Bstatic\_pgi

470.lbm: -march=barcelona -Ofast -m3dnow

482.sphinx3: -march=barcelona -Ofast

### C++ benchmarks:

444.namd: -Mphi(pass 1) -Mipa=jobs:4(pass 2) -Mipa=fast(pass 2)  
 -Mipa=inline(pass 2) -Mpfo(pass 2) -fast -Mfprelaxed  
 -Msmartalloc=huge:150 --zc\_eh -Mnodepchk -Munroll=n:4  
 -Munroll=m:8 -tp barcelona-64 -Bstatic\_pgi

447.deallI: -march=barcelona -Ofast -static -INLINE:aggressive=on  
 -OPT:malloc\_alg=1 -m32 -fno-exceptions

450.soplex: -march=barcelona -fb\_create fbdata(pass 1)  
 -fb\_opt fbdata(pass 2) -m32 -O3 -TENV:frame\_pointer=off  
 -LNO:prefetch=1

453.povray: -march=barcelona -fb\_create fbdata(pass 1)  
 -fb\_opt fbdata(pass 2) -Ofast -CG:load\_exe=0

### Fortran benchmarks:

410.bwaves: -Mphi(pass 1) -Mipa=jobs:4(pass 2) -Mipa=fast(pass 2)  
 -Mipa=inline(pass 2) -Mpfo(pass 2) -fastsse -Mfprelaxed  
 -Msmartalloc -Mprefetch=distance:12 -Mprefetch=nta  
 -tp barcelona-64 -Bstatic\_pgi

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp\_rate2006 = 84.1

PowerEdge T605 (AMD Opteron 2352, 2.10 GHz)

SPECfp\_rate\_base2006 = 76.7

CPU2006 license: 55

Test date: Mar-2008

Test sponsor: Dell Inc.

Hardware Availability: Apr-2008

Tested by: Dell Inc.

Software Availability: May-2008

## Peak Optimization Flags (Continued)

416.gamess: -march=barcelona -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2) -O2 -OPT:Ofast -OPT:ro=3  
-OPT:unroll\_size=256

434.zeusmp: -fastsse -Mfprelaxed -Msmartalloc=huge:150 -Mipa=jobs:4  
-Mipa=fast -Mipa=inline -tp barcelona-64 -Bstatic\_pgi

437.leslie3d: -march=barcelona -Ofast -m3dnow -OPT:unroll\_size=256  
-CG:load\_exe=0 -OPT:malloc\_alg=1

459.GemsFDTD: -march=barcelona -Ofast -LNO:fission=2 -LNO:simd=2  
-OPT:malloc\_alg=1

465.tonto: -march=barcelona -Ofast -OPT:malloc\_alg=1  
-OPT:alias=no\_f90\_pointer\_alias -LNO:blocking=off  
-CG:load\_exe=1 -IPA:plimit=525

Benchmarks using both Fortran and C:

435.gromacs: -fast -Mfpapprox=rsqrt -Mipa=jobs:4 -Mipa=fast  
-Mipa=inline -Mfprelaxed -Msmartalloc=huge:150  
-tp barcelona-64 -Bstatic\_pgi

436.cactusADM: -march=barcelona -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2) -Ofast -WOPT:aggstr=0

454.calculix: -fastsse -Mfprelaxed -Msmartalloc=huge:150 -Mipa=jobs:4  
-Mipa=fast -Mipa=inline -tp barcelona-64 -Bstatic\_pgi

481.wrf: -march=barcelona -Ofast -LNO:blocking=off  
-LNO:prefetch\_ahead=10 -OPT:malloc\_alg=1 -m3dnow  
-LANG:copyinout=off -IPA:callee\_limit=5000

## Peak Other Flags

C benchmarks:

433.milc: -w

C++ benchmarks:

444.namd: -w

Fortran benchmarks:

410.bwaves: -w

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp\_rate2006 = 84.1

PowerEdge T605 (AMD Opteron 2352, 2.10 GHz)

SPECfp\_rate\_base2006 = 76.7

CPU2006 license: 55

Test date: Mar-2008

Test sponsor: Dell Inc.

Hardware Availability: Apr-2008

Tested by: Dell Inc.

Software Availability: May-2008

## Peak Other Flags (Continued)

434.zeusmp: -w

Benchmarks using both Fortran and C:

435.gromacs: -w

454.calculix: -w

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/amd123GH-flags.20090714.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/amd123GH-flags.20090714.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.0.  
Report generated on Tue Jul 22 16:55:19 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 29 April 2008.