



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## IBM Corporation

IBM System x iDataPlex dx340 (Intel Xeon E5440)

**SPECint®\_rate2006 = 121**

**SPECint\_rate\_base2006 = 105**

CPU2006 license: 11


Test sponsor: IBM Corporation

Tested by: IBM Corporation

**Test date:** Apr-2008

**Hardware Availability:** Jun-2008

**Software Availability:** Nov-2007

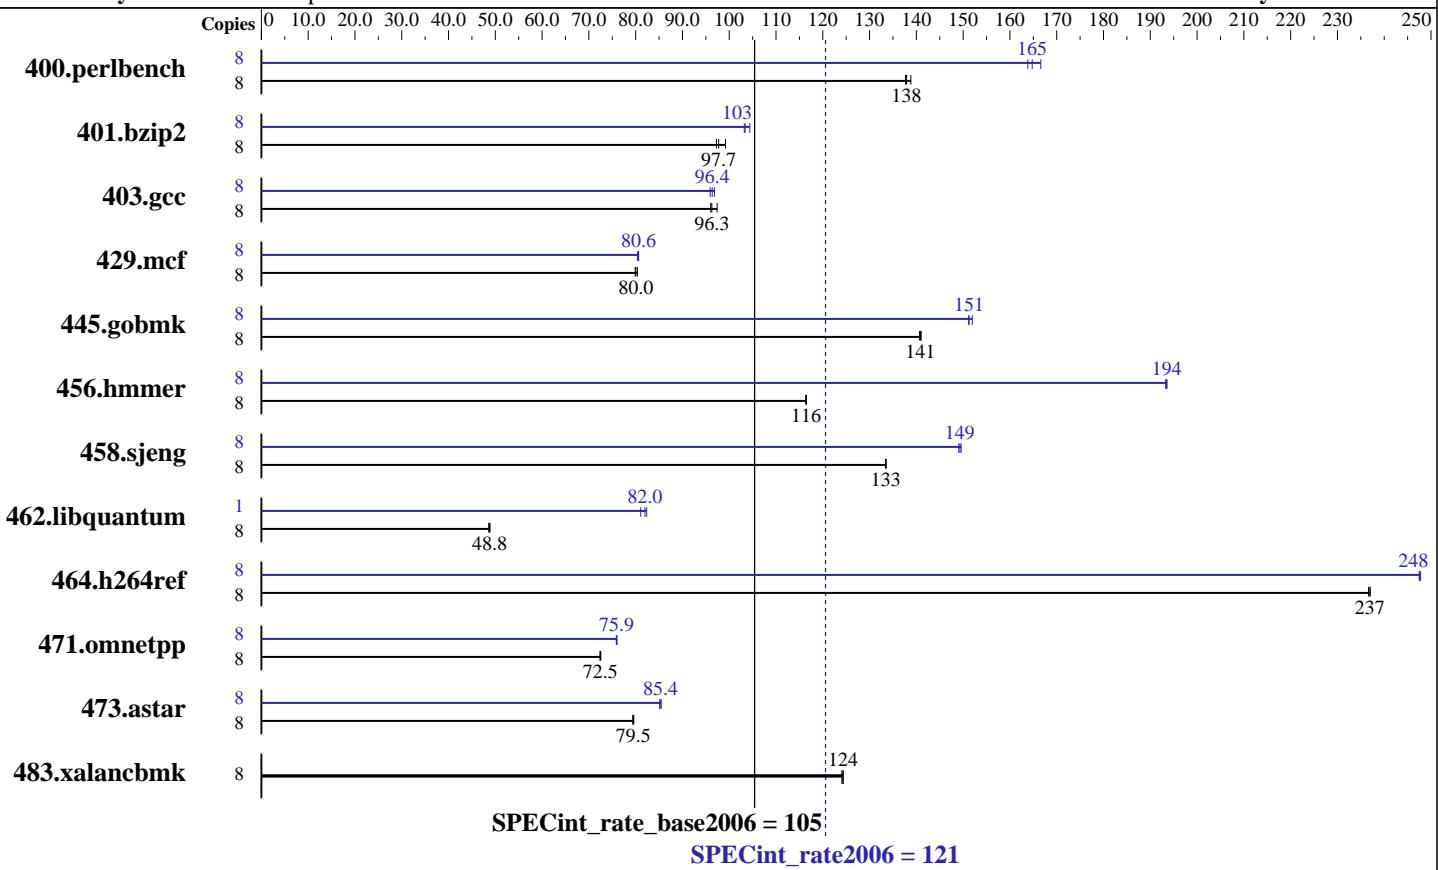

### Hardware

CPU Name: Intel Xeon E5440  
CPU Characteristics: 1333MHz system bus  
CPU MHz: 2833  
FPU: Integrated  
CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip  
CPU(s) orderable: 1,2 chips  
Primary Cache: 32 KB I + 32 KB D on chip per core  
Secondary Cache: 12 MB I+D on chip per chip, 6 MB shared / 2 cores  
L3 Cache: None  
Other Cache: None  
Memory: 16 GB (8 x 2 GB DDR2-5300F ECC)  
Disk Subsystem: 1 x 160 GB SATA, 7200 RPM  
Other Hardware: None

### Software

Operating System: SuSE Linux Enterprise Server 10 (x86\_64) SP1, Kernel 2.6.16.46-0.12-smp  
Compiler: Intel C++ Compiler 10.1 for Linux Build 20070913 Package ID: l\_cc\_p\_10.1.008  
Auto Parallel: Yes  
File System: ReiserFS  
System State: Multi-user, run level 3  
Base Pointers: 32-bit  
Peak Pointers: 32/64-bit  
Other Software: MicroQuill SmartHeap 8.1 Binutils 2.17.50.0.15



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**IBM Corporation**

IBM System x iDataPlex dx340 (Intel Xeon E5440)

**SPECint\_rate2006 = 121**

**SPECint\_rate\_base2006 = 105**

**CPU2006 license:** 11

**Test date:** Apr-2008

**Test sponsor:** IBM Corporation

**Hardware Availability:** Jun-2008

**Tested by:** IBM Corporation

**Software Availability:** Nov-2007

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	8	568	138	563	139	<b>567</b>	<b>138</b>	8	477	164	<b>474</b>	<b>165</b>	469	167
401.bzip2	8	794	97.3	<b>790</b>	<b>97.7</b>	778	99.2	8	748	103	<b>747</b>	<b>103</b>	739	104
403.gcc	8	661	97.4	671	96.0	<b>669</b>	<b>96.3</b>	8	665	96.8	671	95.9	<b>668</b>	<b>96.4</b>
429.mcf	8	<b>911</b>	<b>80.0</b>	908	80.4	913	79.9	8	907	80.4	905	80.6	<b>905</b>	<b>80.6</b>
445.gobmk	8	595	141	<b>596</b>	<b>141</b>	597	141	8	<b>555</b>	<b>151</b>	555	151	552	152
456.hammer	8	641	117	642	116	<b>641</b>	<b>116</b>	8	386	194	386	193	<b>386</b>	<b>194</b>
458.sjeng	8	726	133	725	134	<b>725</b>	<b>133</b>	8	647	150	<b>648</b>	<b>149</b>	649	149
462.libquantum	8	3412	48.6	3394	48.8	<b>3395</b>	<b>48.8</b>	1	<b>253</b>	<b>82.0</b>	256	81.1	252	82.4
464.h264ref	8	748	237	747	237	<b>747</b>	<b>237</b>	8	<b>715</b>	<b>248</b>	714	248	715	247
471.omnetpp	8	691	72.4	689	72.5	<b>690</b>	<b>72.5</b>	8	659	75.9	<b>659</b>	<b>75.9</b>	658	76.0
473.astar	8	708	79.4	706	79.6	<b>706</b>	<b>79.5</b>	8	660	85.1	<b>658</b>	<b>85.4</b>	657	85.4
483.xalancbmk	8	445	124	444	124	<b>444</b>	<b>124</b>	8	445	124	444	124	<b>444</b>	<b>124</b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## General Notes

All benchmarks compiled in 32-bit mode except 401.bzip2 and 456.hammer, for peak, are compiled in 64-bit mode

Hardware Sector Prefetch Disabled and Adjacent Sector Prefetch Disabled

OMP\_NUM\_THREADS set to number of cores

KMP\_AFFINITY set to physical,0

KMP\_STACKSIZE set to 64M

taskset utility used to bind CPU(s) to processes

## Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32

462.libquantum: -DSPEC\_CPU\_LINUX

483.xalancbmk: -DSPEC\_CPU\_LINUX



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM System x iDataPlex dx340 (Intel Xeon E5440)

**SPECint\_rate2006 = 121**

**SPECint\_rate\_base2006 = 105**

CPU2006 license: 11

Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Apr-2008

Hardware Availability: Jun-2008

Software Availability: Nov-2007

## Base Optimization Flags

C benchmarks:

```
-fast -inline-calloc -opt-malloc-options=3
```

C++ benchmarks:

```
-xT -ipo -O3 -no-prec-div -Wl,-z,muldefs  
-L/spec/users/rahul/cpu2006.1.0/lib -lsmartheap
```

## Base Other Flags

C benchmarks:

```
403.gcc: -Dalloca=_alloca
```

## Peak Compiler Invocation

C benchmarks (except as noted below):

```
icc
```

```
401.bzip2: /opt/intel/cce/10.1.008/bin/icc  
-L/opt/intel/cce/10.1.008/lib  
-I/opt/intel/cce/10.1.008/include
```

```
456.hmmer: /opt/intel/cce/10.1.008/bin/icc  
-L/opt/intel/cce/10.1.008/lib  
-I/opt/intel/cce/10.1.008/include
```

C++ benchmarks:

```
icpc
```

## Peak Portability Flags

```
400.perlbench: -DSPEC_CPU_LINUX_IA32
```

```
401.bzip2: -DSPEC_CPU_LP64
```

```
456.hmmer: -DSPEC_CPU_LP64
```

```
462.libquantum: -DSPEC_CPU_LINUX
```

```
483.xalancbmk: -DSPEC_CPU_LINUX
```

## Peak Optimization Flags

C benchmarks:

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**IBM Corporation**

IBM System x iDataPlex dx340 (Intel Xeon E5440)

**SPECint\_rate2006 = 121**

**SPECint\_rate\_base2006 = 105**

**CPU2006 license:** 11

**Test sponsor:** IBM Corporation

**Tested by:** IBM Corporation

**Test date:** Apr-2008

**Hardware Availability:** Jun-2008

**Software Availability:** Nov-2007

## Peak Optimization Flags (Continued)

400.perlbench: -prof-gen(pass 1) -prof-use(pass 2) -fast -ansi-alias  
-prefetch

401.bzip2: -prof-gen(pass 1) -prof-use(pass 2) -fast -prefetch

403.gcc: -fast -inline-calloc -opt-malloc-options=3

429.mcf: -fast -prefetch

445.gobmk: -prof-gen(pass 1) -prof-use(pass 2) -xT -O2 -ipo  
-no-prec-div -ansi-alias

456.hmmer: -fast -unroll12 -ansi-alias -opt-multi-version-aggressive

458.sjeng: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll4

462.libquantum: -fast -unroll14 -O0 -prefetch  
-opt-streaming-stores always -vec-guard-write  
-opt-malloc-options=3 -parallel -par-runtime-control

464.h264ref: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll12  
-ansi-alias

C++ benchmarks:

471.omnetpp: -prof-gen(pass 1) -prof-use(pass 2) -xT -O3 -ipo  
-no-prec-div -ansi-alias -opt-ra-region-strategy=block  
-Wl,-z,muldefs  
-L/spec/users/rahul/cpu2006.1.0/lib -lsmartheap

473.astar: -prof-gen(pass 1) -prof-use(pass 2) -xT -O3 -ipo  
-no-prec-div -ansi-alias -opt-ra-region-strategy=routine  
-Wl,-z,muldefs  
-L/spec/users/rahul/cpu2006.1.0/lib -lsmartheap

483.xalancbmk: basepeak = yes

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic10.1-int-linux64-revC.20090714.01.html>



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

**SPECint\_rate2006 = 121**

IBM System x iDataPlex dx340 (Intel Xeon E5440)

**SPECint\_rate\_base2006 = 105**

**CPU2006 license:** 11

**Test date:** Apr-2008

**Test sponsor:** IBM Corporation

**Hardware Availability:** Jun-2008

**Tested by:** IBM Corporation

**Software Availability:** Nov-2007

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic10.1-int-linux64-revC.20090714.01.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.0.

Report generated on Tue Sep 23 17:47:59 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 13 May 2008.