SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/120Bb-m6
(Intel Xeon L5420)

SPECfp®2006 = 20.1

SPECfp_base2006 = 17.0

CPU2006 license: 9006
Test sponsor: NEC Corporation
Tested by: NEC Corporation

Test date: Apr-2008
Hardware Availability: Apr-2008
Software Availability: Nov-2007

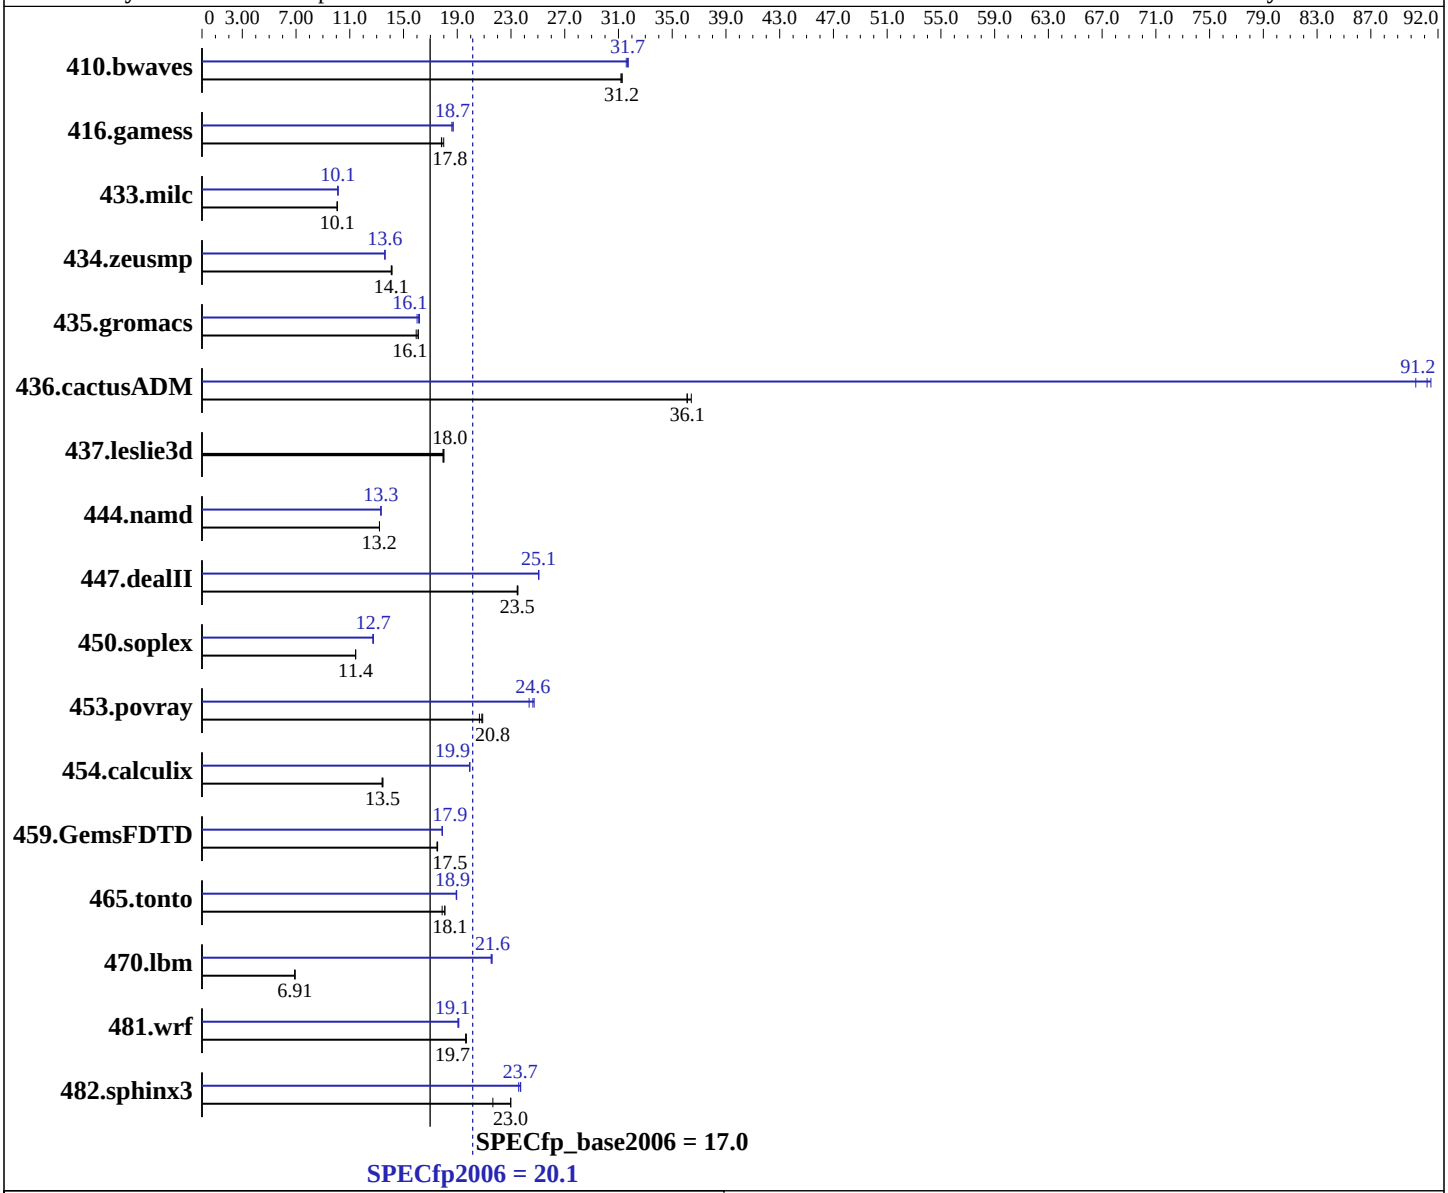

Hardware

CPU Name:	Intel Xeon L5420
CPU Characteristics:	2.50 GHz, 2x6 MB L2 shared, 1333 MHz bus
CPU MHz:	2500
FPU:	Integrated
CPU(s) enabled:	8 cores, 2 chips, 4 cores/chip
CPU(s) orderable:	1,2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	12 MB I+D on chip per chip, 6 MB shared / 2 cores

Continued on next page

Software

Operating System:	SUSE Linux Enterprise Server 10 (x86_64) SP1, Kernel 2.6.16.46-0.12-smp
Compiler:	Intel C++ and Fortran Compiler for Linux32 and Linux64 version 10.1 Build 20070913 Package ID: l_cc_p_10.1.008, l_fc_p_10.1.008
Auto Parallel:	Yes
File System:	ext2

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/120Bb-m6
(Intel Xeon L5420)

SPECfp2006 = 20.1

SPECfp_base2006 = 17.0

CPU2006 license: 9006
Test sponsor: NEC Corporation
Tested by: NEC Corporation

Test date: Apr-2008
Hardware Availability: Apr-2008
Software Availability: Nov-2007

L3 Cache: None
Other Cache: None
Memory: 12 GB (12x1 GB PC2-5300F, 2 rank, CL5-5-5, ECC)
Disk Subsystem: 1x73.2 GB SAS, 10000RPM
Other Hardware: None

System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: 32/64-bit
Other Software: binutils-2.17.tar.gz, Version 2.17

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	**435**	**31.2**	436	31.2	435	31.3	**429**	**31.7**	430	31.6	428	31.7
416.gamess	**1097**	**17.8**	1088	18.0	1099	17.8	1047	18.7	**1048**	**18.7**	1053	18.6
433.milc	912	10.1	**912**	**10.1**	912	10.1	908	10.1	906	10.1	**908**	**10.1**
434.zeusmp	643	14.1	**646**	**14.1**	646	14.1	668	13.6	**668**	**13.6**	668	13.6
435.gromacs	444	16.1	**444**	**16.1**	448	15.9	**443**	**16.1**	441	16.2	446	16.0
436.cactusADM	328	36.4	331	36.1	**331**	**36.1**	**131**	**91.2**	131	91.5	132	90.3
437.leslie3d	522	18.0	524	17.9	**523**	**18.0**	522	18.0	524	17.9	**523**	**18.0**
444.namd	**607**	**13.2**	607	13.2	607	13.2	603	13.3	602	13.3	**602**	**13.3**
447.dealII	**487**	**23.5**	486	23.5	487	23.5	457	25.1	**456**	**25.1**	456	25.1
450.soplex	730	11.4	**730**	**11.4**	729	11.4	654	12.8	656	12.7	**654**	**12.7**
453.povray	258	20.6	255	20.9	**255**	**20.8**	**216**	**24.6**	218	24.3	215	24.7
454.calculix	616	13.4	613	13.5	**613**	**13.5**	414	19.9	414	19.9	**414**	**19.9**
459.GemsFDTD	605	17.5	**606**	**17.5**	606	17.5	593	17.9	593	17.9	**593**	**17.9**
465.tonto	551	17.9	544	18.1	**545**	**18.1**	519	19.0	**520**	**18.9**	520	18.9
470.lbm	1983	6.93	**1988**	**6.91**	1991	6.90	637	21.6	**637**	**21.6**	638	21.5
481.wrf	**568**	**19.7**	568	19.7	569	19.6	584	19.1	**586**	**19.1**	586	19.1
482.sphinx3	900	21.7	**848**	**23.0**	848	23.0	822	23.7	**822**	**23.7**	827	23.6

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Invocation Notes

```
OMP_NUM_THREADS set to number of cores
```

Operating System Notes

```
'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run
```

General Notes

```
All benchmarks compiled in 64-bit mode except 450.soplex,
470.lbm and 482.sphinx3, for peak, are compiled in 32-bit mode
```

Base Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc

Fortran benchmarks:
ifort

Benchmarks using both Fortran and C:
icc ifort

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
-fast -parallel

C++ benchmarks:
-fast -parallel

Fortran benchmarks:
-fast -parallel

Benchmarks using both Fortran and C:
-fast -parallel

Peak Compiler Invocation

C benchmarks (except as noted below):
`/opt/intel/cc/10.1.008/bin/icc -L/opt/intel/cc/10.1.008/lib -I/opt/intel/cc/10.1.008/include`

433.milc: `icc`

C++ benchmarks (except as noted below):
`icpc`

450.soplex: `/opt/intel/cc/10.1.008/bin/icpc -L/opt/intel/cc/10.1.008/lib -I/opt/intel/cc/10.1.008/include`

Fortran benchmarks:
`ifort`

Benchmarks using both Fortran and C:
`icc ifort`

Peak Portability Flags

410.bwaves: `-DSPEC_CPU_LP64`
416.gamess: `-DSPEC_CPU_LP64`
433.milc: `-DSPEC_CPU_LP64`
434.zeusmp: `-DSPEC_CPU_LP64`
435.gromacs: `-DSPEC_CPU_LP64 -nofor_main`
436.cactusADM: `-DSPEC_CPU_LP64 -nofor_main`
437.leslie3d: `-DSPEC_CPU_LP64`
444.namd: `-DSPEC_CPU_LP64`
447.dealII: `-DSPEC_CPU_LP64`
453.povray: `-DSPEC_CPU_LP64`
454.calculix: `-DSPEC_CPU_LP64 -nofor_main`
459.GemsFDTD: `-DSPEC_CPU_LP64`
465.tonto: `-DSPEC_CPU_LP64`
481.wrf: `-DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX`

Peak Optimization Flags

C benchmarks:

433.milc: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -fno-alias -auto-ilp32`

470.lbm: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -unroll2 -scalar-rep- -prefetch -opt-malloc-options=3`

Continued on next page

Peak Optimization Flags (Continued)

482.sphinx3: `-fast -unroll2`

C++ benchmarks:

444.namd: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -fno-alias -auto-ilp32`

447.dealII: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -unroll2 -ansi-alias -scalar-rep-`

450.soplex: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -opt-malloc-options=3`

453.povray: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -unroll4 -ansi-alias`

Fortran benchmarks:

410.bwaves: `-fast -prefetch -parallel`

416.gamess: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -unroll2 -Ob0 -ansi-alias -scalar-rep-`

434.zeusmp: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast`

437.leslie3d: `basepeak = yes`

459.GemsFDTD: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -unroll2 -Ob0 -prefetch -parallel`

465.tonto: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -unroll4 -auto`

Benchmarks using both Fortran and C:

435.gromacs: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -prefetch -auto-ilp32`

436.cactusADM: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -unroll2 -prefetch -parallel -auto-ilp32`

454.calculix: `-fast -unroll-aggressive -auto-ilp32`

481.wrf: `-fast -parallel -prefetch -auto-ilp32`

The flags file that was used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/NEC-Intel-ic10.1-FP-intel64-linux-flags.20090714.html`

You can also download the XML flags source by saving the following link:
`http://www.spec.org/cpu2006/flags/NEC-Intel-ic10.1-FP-intel64-linux-flags.20090714.xml`

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Jul 22 17:18:52 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 13 May 2008.