



# SPEC<sup>®</sup> CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## NEC Corporation

Express5800/120Ei  
(Intel Xeon E5420)

SPECfp<sup>®</sup>\_rate2006 = 63.7

SPECfp\_rate\_base2006 = 58.7

CPU2006 license: 9006


Test sponsor: NEC Corporation

Tested by: NEC Corporation

Test date: Apr-2008

Hardware Availability: Apr-2008

Software Availability: Nov-2007

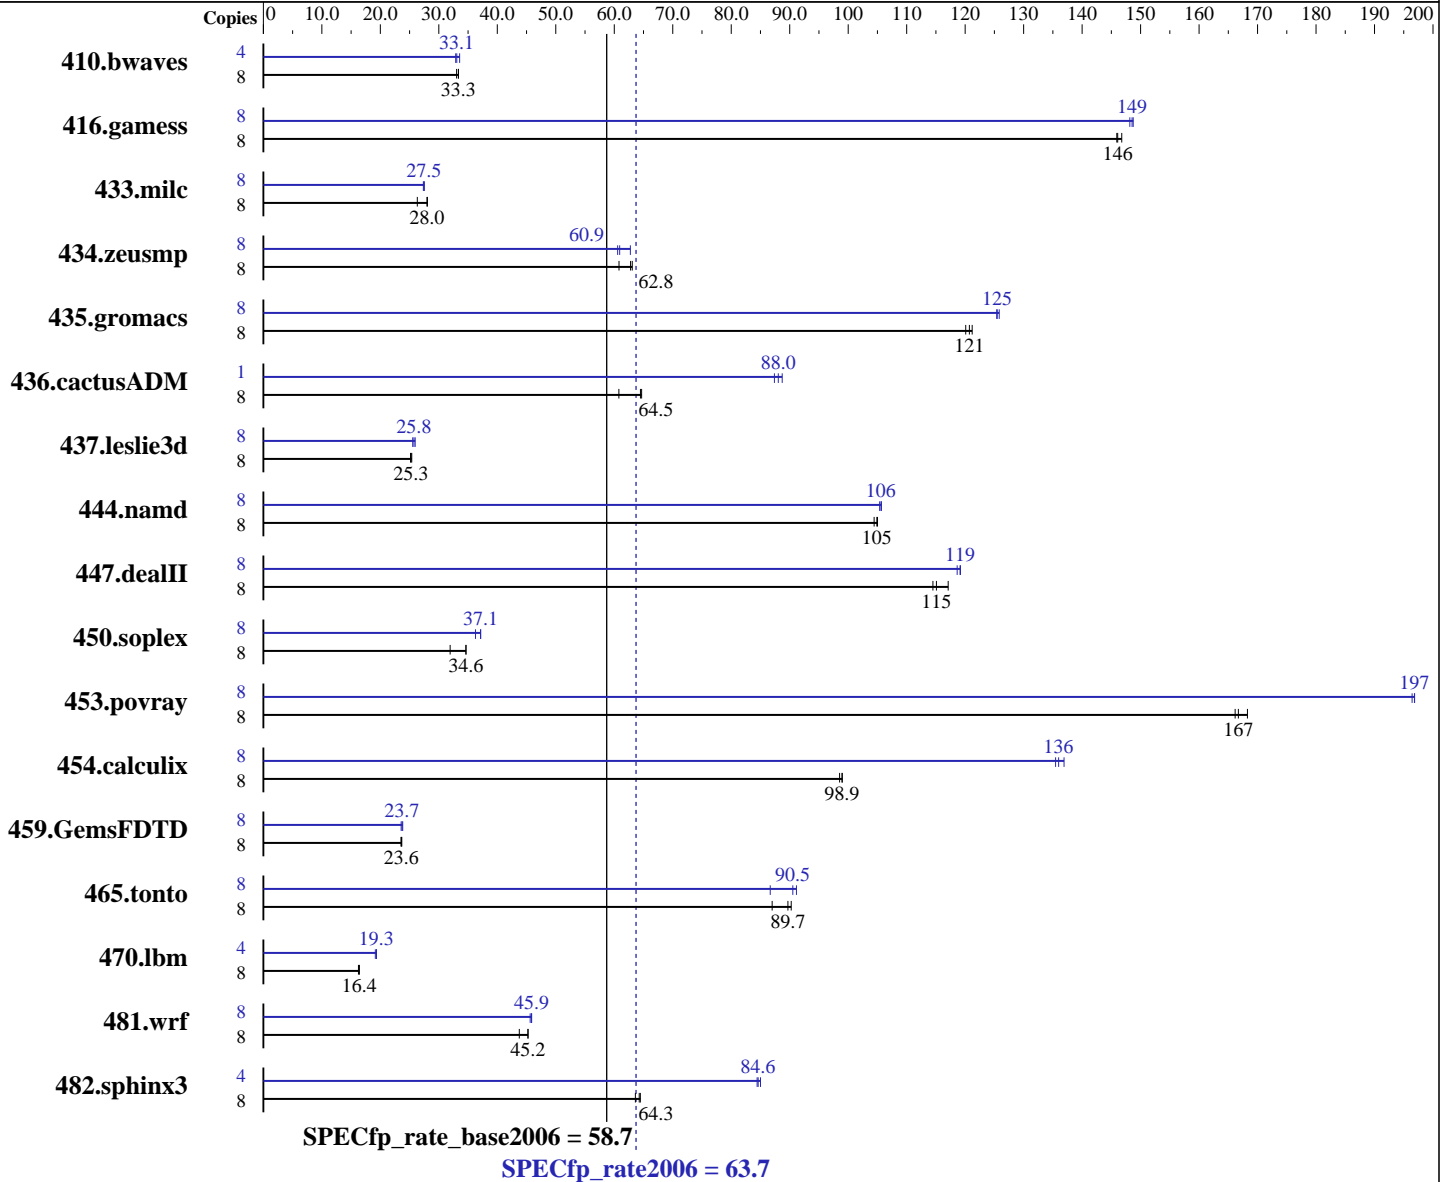

### Hardware

CPU Name: Intel Xeon E5420  
 CPU Characteristics: 2.50 GHz, 2x6 MB L2 shared, 1333 MHz bus  
 CPU MHz: 2500  
 FPU: Integrated  
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 12 MB I+D on chip per chip, 6 MB shared / 2 cores

Continued on next page

### Software

Operating System: SUSE Linux Enterprise Server 10 (x86\_64) SP1, Kernel 2.6.16.46-0.12-smp  
 Compiler: Intel C++ and Fortran Compiler for Linux32 and Linux64 version 10.1 Build 20070913 Package ID: l\_cc\_p\_10.1.008, l\_fc\_p\_10.1.008  
 Auto Parallel: Yes  
 File System: ext2

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## NEC Corporation

Express5800/120Ei  
(Intel Xeon E5420)

SPECfp\_rate2006 = 63.7

SPECfp\_rate\_base2006 = 58.7

CPU2006 license: 9006  
Test sponsor: NEC Corporation  
Tested by: NEC Corporation

Test date: Apr-2008  
Hardware Availability: Apr-2008  
Software Availability: Nov-2007

L3 Cache: None  
Other Cache: None  
Memory: 16 GB (8x2 GB PC2-5300F, 2 rank, CL5-5-5, ECC)  
Disk Subsystem: 1x250 GB SATAII, 7200RPM  
Other Hardware: None

System State: Run level 3 (multi-user)  
Base Pointers: 64-bit  
Peak Pointers: 32/64-bit  
Other Software: binutils-2.17.tar.gz, Version 2.17

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	8	3291	33.0	<u>3261</u>	<u>33.3</u>	3259	33.4	4	1620	33.6	1653	32.9	<u>1644</u>	<u>33.1</u>
416.gamess	8	<u>1072</u>	<u>146</u>	1067	147	1073	146	8	1057	148	<u>1055</u>	<u>149</u>	1053	149
433.milc	8	2790	26.3	2618	28.1	<u>2626</u>	<u>28.0</u>	8	2669	27.5	2685	27.4	<u>2674</u>	<u>27.5</u>
434.zeusmp	8	1197	60.8	<u>1159</u>	<u>62.8</u>	1154	63.1	8	1160	62.8	<u>1195</u>	<u>60.9</u>	1202	60.6
435.gromacs	8	<u>473</u>	<u>121</u>	471	121	476	120	8	455	125	<u>455</u>	<u>125</u>	454	126
436.cactusADM	8	1573	60.8	<u>1483</u>	<u>64.5</u>	1478	64.7	1	135	88.7	<u>136</u>	<u>88.0</u>	137	87.4
437.leslie3d	8	2989	25.2	<u>2978</u>	<u>25.3</u>	2964	25.4	8	2897	26.0	2945	25.5	<u>2920</u>	<u>25.8</u>
444.namd	8	614	104	<u>612</u>	<u>105</u>	611	105	8	609	105	607	106	<u>608</u>	<u>106</u>
447.dealII	8	782	117	799	114	<u>795</u>	<u>115</u>	8	<u>768</u>	<u>119</u>	771	119	768	119
450.soplex	8	2089	31.9	<u>1927</u>	<u>34.6</u>	1926	34.6	8	1839	36.3	<u>1796</u>	<u>37.1</u>	1796	37.2
453.povray	8	256	166	<u>255</u>	<u>167</u>	253	168	8	216	197	217	196	<u>216</u>	<u>197</u>
454.calculix	8	667	99.0	<u>667</u>	<u>98.9</u>	670	98.5	8	482	137	487	135	<u>485</u>	<u>136</u>
459.GemsFDTD	8	3586	23.7	3607	23.5	<u>3596</u>	<u>23.6</u>	8	3603	23.6	<u>3578</u>	<u>23.7</u>	3562	23.8
465.tonto	8	905	87.0	872	90.3	<u>878</u>	<u>89.7</u>	8	908	86.7	864	91.2	<u>870</u>	<u>90.5</u>
470.lbm	8	6762	16.3	6703	16.4	<u>6710</u>	<u>16.4</u>	4	2871	19.1	2842	19.3	<u>2843</u>	<u>19.3</u>
481.wrf	8	2042	43.8	<u>1975</u>	<u>45.2</u>	1974	45.3	8	1948	45.9	1959	45.6	<u>1949</u>	<u>45.9</u>
482.sphinx3	8	2419	64.5	2451	63.6	<u>2426</u>	<u>64.3</u>	4	923	84.4	917	85.0	<u>921</u>	<u>84.6</u>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Invocation Notes

OMP\_NUM\_THREADS set to number of cores

## Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run  
'/usr/bin/taskset' used to bind processes to CPUs

## Platform Notes

Bios settings:  
Hardware Prefetcher: Disabled  
Adjacent Cache Line Prefetch: Disabled  
Intel SpeedStep Technology: Disabled



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**NEC Corporation**

Express5800/120Ei  
(Intel Xeon E5420)

**SPECfp\_rate2006 = 63.7**

**SPECfp\_rate\_base2006 = 58.7**

**CPU2006 license:** 9006

**Test sponsor:** NEC Corporation

**Tested by:** NEC Corporation

**Test date:** Apr-2008

**Hardware Availability:** Apr-2008

**Software Availability:** Nov-2007

## General Notes

All benchmarks compiled in 64-bit mode except 437.leslie3d, 450.soplex, 470.lbm and 482.sphinx3, for peak, are compiled in 32-bit mode

## Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

icc ifort

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
 416.gamess: -DSPEC\_CPU\_LP64  
 433.milc: -DSPEC\_CPU\_LP64  
 434.zeusmp: -DSPEC\_CPU\_LP64  
 435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
 436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
 437.leslie3d: -DSPEC\_CPU\_LP64  
 444.namd: -DSPEC\_CPU\_LP64  
 447.dealII: -DSPEC\_CPU\_LP64  
 450.soplex: -DSPEC\_CPU\_LP64  
 453.povray: -DSPEC\_CPU\_LP64  
 454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
 459.GemsFDTD: -DSPEC\_CPU\_LP64  
 465.tonto: -DSPEC\_CPU\_LP64  
 470.lbm: -DSPEC\_CPU\_LP64  
 481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
 482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:

-fast

C++ benchmarks:

-fast

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**NEC Corporation**

Express5800/120Ei  
(Intel Xeon E5420)

**SPECfp\_rate2006 = 63.7**

**SPECfp\_rate\_base2006 = 58.7**

**CPU2006 license:** 9006

**Test sponsor:** NEC Corporation

**Tested by:** NEC Corporation

**Test date:** Apr-2008

**Hardware Availability:** Apr-2008

**Software Availability:** Nov-2007

## Base Optimization Flags (Continued)

Fortran benchmarks:

-fast

Benchmarks using both Fortran and C:

-fast

## Peak Compiler Invocation

C benchmarks (except as noted below):

/opt/intel/cc/10.1.008/bin/icc -L/opt/intel/cc/10.1.008/lib  
-I/opt/intel/cc/10.1.008/include

433.milc: icc

C++ benchmarks (except as noted below):

icpc

450.soplex: /opt/intel/cc/10.1.008/bin/icpc -L/opt/intel/cc/10.1.008/lib  
-I/opt/intel/cc/10.1.008/include

Fortran benchmarks (except as noted below):

ifort

437.leslie3d: /opt/intel/fc/10.1.008/bin/ifort -L/opt/intel/fc/10.1.008/lib  
-I/opt/intel/fc/10.1.008/include

Benchmarks using both Fortran and C:

icc ifort

## Peak Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## NEC Corporation

Express5800/120Ei  
(Intel Xeon E5420)

SPECfp\_rate2006 = 63.7

SPECfp\_rate\_base2006 = 58.7

**CPU2006 license:** 9006  
**Test sponsor:** NEC Corporation  
**Tested by:** NEC Corporation

**Test date:** Apr-2008  
**Hardware Availability:** Apr-2008  
**Software Availability:** Nov-2007

## Peak Optimization Flags

### C benchmarks:

433.milc: -prof-gen(pass 1) -prof-use(pass 2) -fast -fno-alias  
-auto-ilp32

470.lbm: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2  
-scalar-rep- -prefetch -opt-malloc-options=3

482.sphinx3: -fast -unroll2

### C++ benchmarks:

444.namd: -prof-gen(pass 1) -prof-use(pass 2) -fast -fno-alias  
-auto-ilp32

447.dealII: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2  
-ansi-alias -scalar-rep-

450.soplex: -prof-gen(pass 1) -prof-use(pass 2) -fast  
-opt-malloc-options=3

453.povray: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll4  
-ansi-alias

### Fortran benchmarks:

410.bwaves: -fast -prefetch

416.gamess: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2 -Ob0  
-ansi-alias -scalar-rep-

434.zeusmp: -prof-gen(pass 1) -prof-use(pass 2) -fast

437.leslie3d: -prof-gen(pass 1) -prof-use(pass 2) -fast -prefetch  
-opt-malloc-options=3

459.GemsFDTD: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2 -Ob0  
-prefetch

465.tonto: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll4 -auto

### Benchmarks using both Fortran and C:

435.gromacs: -prof-gen(pass 1) -prof-use(pass 2) -fast -prefetch  
-auto-ilp32

436.cactusADM: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2  
-prefetch -parallel -auto-ilp32

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**NEC Corporation**

Express5800/120Ei  
(Intel Xeon E5420)

**SPECfp\_rate2006 = 63.7**

**SPECfp\_rate\_base2006 = 58.7**

**CPU2006 license:** 9006

**Test sponsor:** NEC Corporation

**Tested by:** NEC Corporation

**Test date:** Apr-2008

**Hardware Availability:** Apr-2008

**Software Availability:** Nov-2007

## Peak Optimization Flags (Continued)

454.calculix: -fast -unroll-aggressive -auto-ilp32

481.wrf: -fast -auto-ilp32

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/NEC-Intel-ic10.1-FP-intel64-linux-flags.20090714.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/NEC-Intel-ic10.1-FP-intel64-linux-flags.20090714.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.0.  
Report generated on Tue Jul 22 17:01:27 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 27 May 2008.