



SPEC[®] CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sun Microsystems Sun Fire X2200 M2

SPECint[®]_rate2006 = 97.2

SPECint_rate_base2006 = 84.6

CPU2006 license: 6


Test sponsor: Sun Microsystems

Tested by: Sun Microsystems

Test date: May-2008

Hardware Availability: May-2008

Software Availability: May-2008

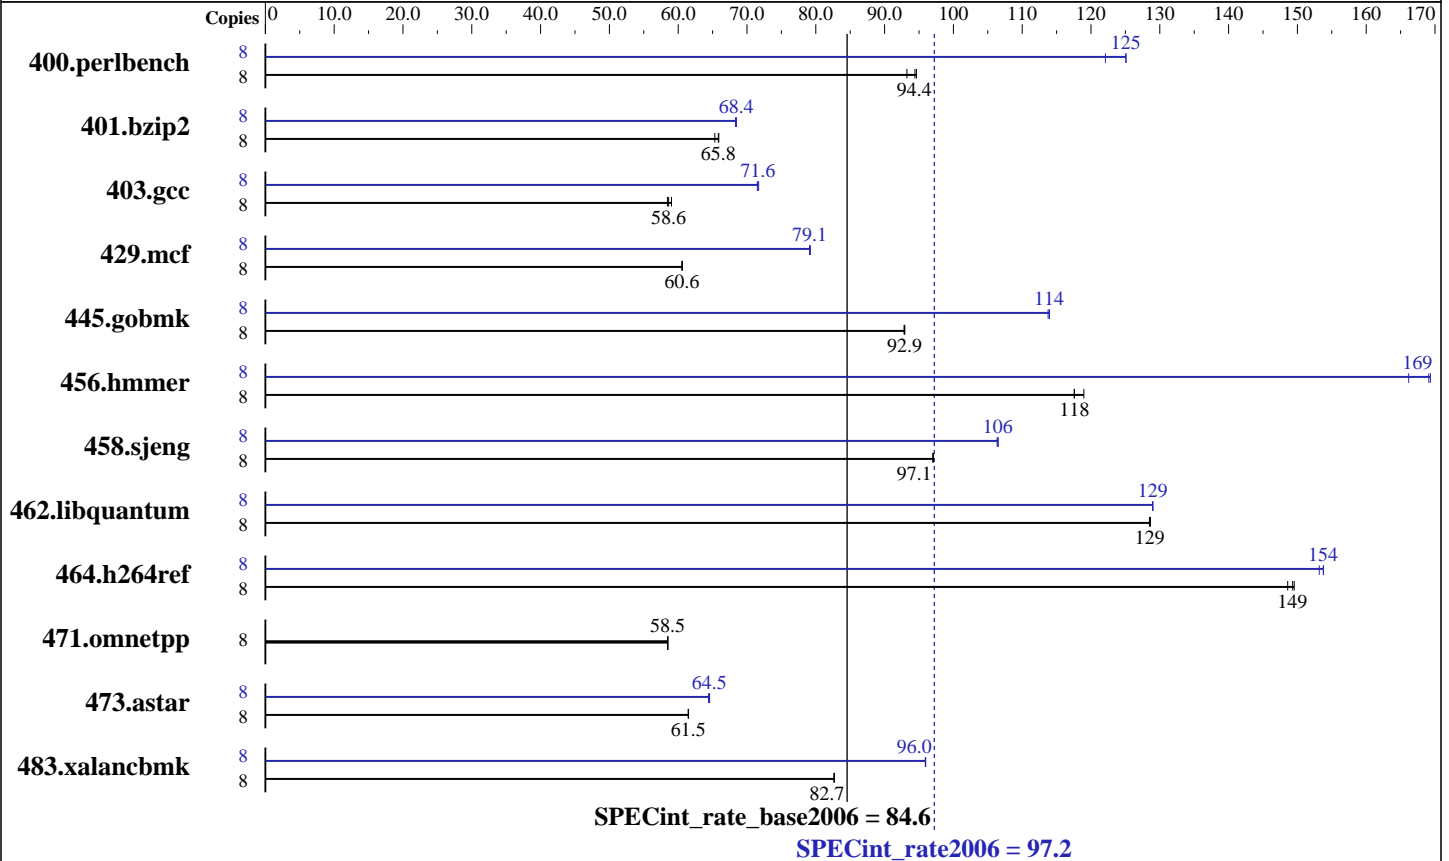

Hardware

CPU Name: AMD Opteron 2356
 CPU Characteristics:
 CPU MHz: 2300
 FPU: Integrated
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip
 CPU(s) orderable: 2,4 chips
 Primary Cache: 64 KB I + 64 KB D on chip per core
 Secondary Cache: 512 KB I+D on chip per core
 L3 Cache: 2 MB I+D on chip per chip
 Other Cache: None
 Memory: 64 GB (16x4GB, DDR2-667, CL5, Reg, Dual Rank)
 Disk Subsystem: SAS, 72 GB, 10 K RPM
 Other Hardware: None

Software

Operating System: SuSE Linux Enterprise Server 10 (x86_64) SP1, Kernel 2.6.16.46-0.12-smp
 Compiler: PGI Server Complete Version 7.2
 PathScale Compiler Suite Version 3.1
 Auto Parallel: No
 File System: ext3
 System State: Runlevel 3 (Full multiuser with network)
 Base Pointers: 32/64-bit
 Peak Pointers: 32/64-bit
 Other Software: SmartHeap 8.0 32-bit Library for Linux



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sun Microsystems
Sun Fire X2200 M2

SPECint_rate2006 = 97.2
SPECint_rate_base2006 = 84.6

CPU2006 license: 6
Test sponsor: Sun Microsystems
Tested by: Sun Microsystems

Test date: May-2008
Hardware Availability: May-2008
Software Availability: May-2008

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	8	826	94.6	838	93.2	828	94.4	8	640	122	625	125	625	125
401.bzip2	8	1171	65.9	1182	65.3	1173	65.8	8	1130	68.3	1128	68.4	1128	68.5
403.gcc	8	1091	59.0	1099	58.6	1102	58.4	8	900	71.6	901	71.5	898	71.7
429.mcf	8	1205	60.5	1205	60.6	1203	60.6	8	921	79.2	922	79.1	923	79.1
445.gobmk	8	903	92.9	904	92.8	903	92.9	8	738	114	736	114	737	114
456.hammer	8	627	119	635	118	635	118	8	441	169	441	169	449	166
458.sjeng	8	997	97.1	997	97.1	998	97.0	8	909	107	909	106	910	106
462.libquantum	8	1289	129	1288	129	1290	128	8	1285	129	1285	129	1285	129
464.h264ref	8	1184	150	1186	149	1191	149	8	1156	153	1151	154	1151	154
471.omnetpp	8	855	58.5	855	58.5	855	58.5	8	855	58.5	855	58.5	855	58.5
473.astar	8	913	61.5	913	61.5	914	61.5	8	872	64.4	870	64.6	870	64.5
483.xalancbmk	8	668	82.6	667	82.7	668	82.7	8	576	95.9	575	96.0	575	96.0

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

'numactl' was used to bind copies to the cores
Environment variable PGI_HUGE_PAGES set to 150
'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2457600' was used to set environment locked pages in memory quantity
Set vm/nr_hugepages=1200 in /etc/sysctl.conf
mount -t hugetlbfs nodev /mnt/hugepages

Platform Notes

Default BIOS settings were used.

Base Compiler Invocation

C benchmarks:
pgcc
C++ benchmarks:
pgcpp

Base Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sun Microsystems
Sun Fire X2200 M2

SPECint_rate2006 = 97.2

SPECint_rate_base2006 = 84.6

CPU2006 license: 6

Test sponsor: Sun Microsystems

Tested by: Sun Microsystems

Test date: May-2008

Hardware Availability: May-2008

Software Availability: May-2008

Base Portability Flags (Continued)

401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:

-fast -Mipa=jobs:4 -Mipa=fast -Mipa=inline -Mfprelaxed
-Msmartalloc=huge:150 -tp barcelona-64 -Bstatic_pgi

C++ benchmarks:

-fastsse -Mipa=jobs:4 -Mipa=fast -Mipa=inline -Mfprelaxed
-Msmartalloc=huge:150 --zc_eh -tp barcelona -Bstatic_pgi

Base Other Flags

C benchmarks:

-w

C++ benchmarks:

-w

Peak Compiler Invocation

C benchmarks (except as noted below):

pgcc

400.perlbench: pathcc

403.gcc: pathcc

445.gobmk: pathcc

C++ benchmarks (except as noted below):

pathCC

471.omnetpp: pgcpp



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sun Microsystems
Sun Fire X2200 M2

SPECint_rate2006 = 97.2

SPECint_rate_base2006 = 84.6

CPU2006 license: 6
Test sponsor: Sun Microsystems
Tested by: Sun Microsystems

Test date: May-2008
Hardware Availability: May-2008
Software Availability: May-2008

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
483.xalanbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -IPA:plimit=20000 -LNO:opt=0
-WOPT:if_conv=0 -CG:local_sched_alg=1

401.bzip2: -Mpfi(pass 1) -Mpfo(pass 2) -fast -O4
-Msmartalloc=huge:150 -Mnounroll -tp barcelona-64
-Bstatic_pgi

403.gcc: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -m32 -O3 -OPT:Ofast

429.mcf: -fastsse -Mipa=jobs:4 -Mipa=fast -Mipa=inline:1
-Msmartalloc=huge:150 -tp barcelona -Bstatic_pgi

445.gobmk: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -O3 -OPT:alias=restrict -LNO:opt=0
-CG:p2align=on

456.hmmer: -fastsse -Munroll=n:8 -Msmartalloc=huge:150 -Mfprelaxed
-Mvect=partial -Msafeptr -Mipa=jobs:4 -Mipa=const
-Mipa=ptr -Mipa=arg -Mipa=inline -tp barcelona-64
-Bstatic_pgi

458.sjeng: -Mpfi(pass 1) -Mipa=jobs:4(pass 2) -Mipa=fast(pass 2)
-Mipa=inline:1(pass 2) -Mipa=noarg(pass 2) -Mpfo(pass 2)
-fastsse -Msmartalloc=huge:150 -Mfprelaxed
-tp barcelona-64 -Bstatic_pgi

462.libquantum: -fastsse -Mfprelaxed -Msmartalloc=huge:150 -Munroll=m:8
-Mipa=jobs:4 -Mipa=fast -Mipa=inline -Mipa=noarg
-tp barcelona-64 -Bstatic_pgi

464.h264ref: -Mpfi=indirect(pass 1) -Mipa=jobs:4(pass 2)
-Mipa=fast(pass 2) -Mipa=inline(pass 2)
-Mpfo=indirect(pass 2) -fastsse -Msmartalloc=huge:150
-Mfprelaxed -tp barcelona-64 -Bstatic_pgi

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sun Microsystems
Sun Fire X2200 M2

SPECint_rate2006 = 97.2
SPECint_rate_base2006 = 84.6

CPU2006 license: 6
Test sponsor: Sun Microsystems
Tested by: Sun Microsystems

Test date: May-2008
Hardware Availability: May-2008
Software Availability: May-2008

Peak Optimization Flags (Continued)

C++ benchmarks:

```
471.omnetpp: basepeak = yes

473.astar: -march=barcelona -Ofast -TENV:frame_pointer=off
          -WOPT:if_conv=0 -GRA:optimize_boundary=on -IPA:plimit=525
          -m32 -lsmartheap

483.xalancbmk: -march=barcelona -Ofast -m32 -OPT:unroll_times_max=8
              -CG:push_pop_int_saved_regs=off -CG:ptr_load_use=0
              -lsmartheap
```

Peak Other Flags

C benchmarks (except as noted below):

-w

400.perlbench: No flags used

403.gcc: No flags used

445.gobmk: No flags used

C++ benchmarks (except as noted below):

-L/root/work/cpu2006/amd123GH.libs/32

471.omnetpp: -w

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/amd123GH-flags.20090713.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/amd123GH-flags.20090713.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Jul 22 17:36:53 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 11 June 2008.