



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Sun Microsystems
Sun Fire X4140**

**SPECint®2006 = 14.4
SPECint_base2006 = 12.4**

CPU2006 license: 6


Test sponsor: Sun Microsystems

Tested by: Sun Microsystems

Test date: May-2008

Hardware Availability: May-2008

Software Availability: May-2008

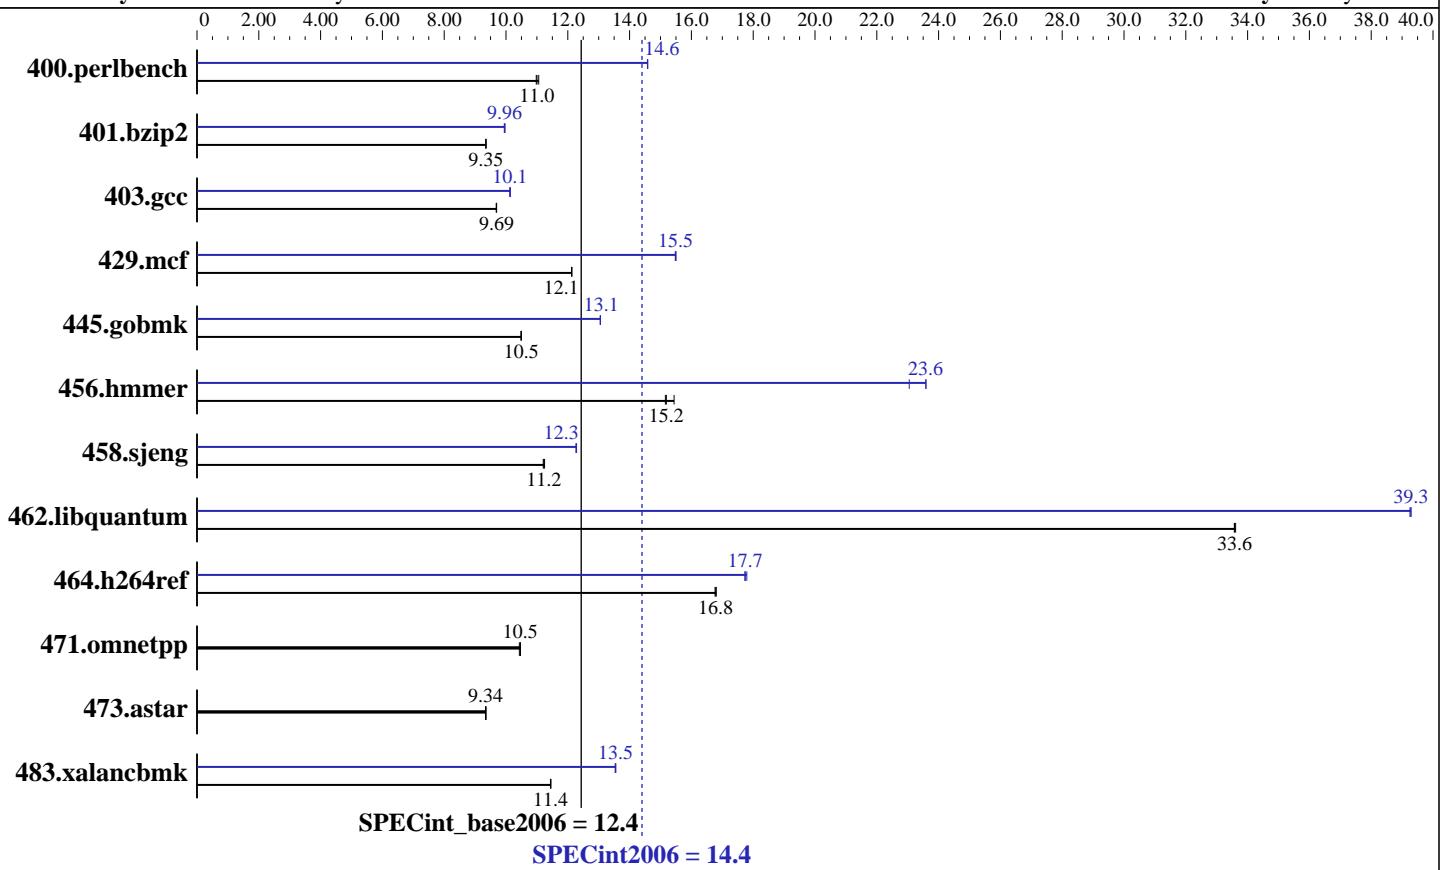

Hardware		Software	
CPU Name:	AMD Opteron 2356	Operating System:	SuSE Linux Enterprise Server 10 (x86_64) SP1, Kernel 2.6.16.46-0.12-smp
CPU Characteristics:		Compiler:	PGI Server Complete Version 7.2
CPU MHz:	2300	Auto Parallel:	PathScale Compiler Suite Version 3.1
FPU:	Integrated	File System:	No
CPU(s) enabled:	8 cores, 2 chips, 4 cores/chip	System State:	ext3
CPU(s) orderable:	1,2 chips	Base Pointers:	Runlevel 3 (Full multiuser with network)
Primary Cache:	64 KB I + 64 KB D on chip per core	Peak Pointers:	32/64-bit
Secondary Cache:	512 KB I+D on chip per core	Other Software:	SmartHeap 8.0 32-bit Library for Linux
L3 Cache:	2 MB I+D on chip per chip		
Other Cache:	None		
Memory:	32 GB (8x4GB, DDR2-667, CL5, Reg, Dual Rank)		
Disk Subsystem:	SAS, 72 GB,10 K RPM		
Other Hardware:	None		



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Sun Microsystems
Sun Fire X4140**

**SPECint2006 = 14.4
SPECint_base2006 = 12.4**

CPU2006 license: 6

Test date: May-2008

Test sponsor: Sun Microsystems

Hardware Availability: May-2008

Tested by: Sun Microsystems

Software Availability: May-2008

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	890	11.0	888	11.0	883	11.1	670	14.6	670	14.6	670	14.6
401.bzip2	1032	9.35	1032	9.35	1032	9.35	968	9.97	969	9.96	970	9.94
403.gcc	830	9.70	830	9.69	831	9.68	794	10.1	794	10.1	795	10.1
429.mcf	752	12.1	752	12.1	752	12.1	588	15.5	589	15.5	589	15.5
445.gobmk	999	10.5	1000	10.5	1000	10.5	804	13.1	804	13.1	804	13.1
456.hmmer	614	15.2	604	15.4	616	15.2	396	23.6	395	23.6	405	23.0
458.sjeng	1080	11.2	1078	11.2	1076	11.2	986	12.3	985	12.3	986	12.3
462.libquantum	617	33.6	616	33.6	617	33.6	527	39.3	527	39.3	528	39.3
464.h264ref	1317	16.8	1318	16.8	1320	16.8	1247	17.7	1248	17.7	1244	17.8
471.omnetpp	599	10.4	597	10.5	597	10.5	599	10.4	597	10.5	597	10.5
473.astar	752	9.34	750	9.36	751	9.34	752	9.34	750	9.36	751	9.34
483.xalancbmk	602	11.5	603	11.4	603	11.4	509	13.5	509	13.6	510	13.5

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Environment variable PGI_HUGE_PAGES set to 150
 'ulimit -s unlimited' was used to set environment stack size
 'ulimit -l 2457600' was used to set environment locked pages in memory quantity
 Set vm.nr_hugepages=1200 in /etc/sysctl.conf
 mount -t hugetlbfs nodev /mnt/hugepages

Platform Notes

Default BIOS settings were used.

Base Compiler Invocation

C benchmarks:
 pgcc

C++ benchmarks:
 pgcpp

Base Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
 401.bzip2: -DSPEC_CPU_LP64

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sun Microsystems
Sun Fire X4140

SPECint2006 = 14.4
SPECint_base2006 = 12.4

CPU2006 license: 6

Test sponsor: Sun Microsystems

Tested by: Sun Microsystems

Test date: May-2008

Hardware Availability: May-2008

Software Availability: May-2008

Base Portability Flags (Continued)

```
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hammer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX
```

Base Optimization Flags

C benchmarks:

```
-fast -Mipa=jobs:4 -Mipa=fast -Mipa=inline -Mfrelaxed
-Msmartralloc=huge:150 -tp barcelona-64 -Bstatic_pgi
```

C++ benchmarks:

```
-fastsse -Mipa=jobs:4 -Mipa=fast -Mipa=inline -Mfrelaxed
-Msmartralloc=huge:150 --zc_eh -tp barcelona -Bstatic_pgi
```

Base Other Flags

C benchmarks:

```
-w
```

C++ benchmarks:

```
-w
```

Peak Compiler Invocation

C benchmarks (except as noted below):

```
pgcc
```

400.perlbench: pathcc

403.gcc: pathcc

445.gobmk: pathcc

C++ benchmarks (except as noted below):

```
pgcpp
```

483.xalancbmk: pathCC



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Sun Microsystems
Sun Fire X4140**

**SPECint2006 = 14.4
SPECint_base2006 = 12.4**

CPU2006 license: 6

Test sponsor: Sun Microsystems

Tested by: Sun Microsystems

Test date: May-2008

Hardware Availability: May-2008

Software Availability: May-2008

Peak Portability Flags

```
400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
 401.bzip2: -DSPEC_CPU_LP64
 445.gobmk: -DSPEC_CPU_LP64
 456.hmmer: -DSPEC_CPU_LP64
 458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
 464.h264ref: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX
```

Peak Optimization Flags

C benchmarks:

```
400.perlbench: -march=barcelona -fb_create fbdata(pass 1)
  -fb_opt fbdata(pass 2) -Ofast -IPA:plimit=20000 -LNO:opt=0
  -WOPT;if_conv=0 -CG:local_sched_alg=1

401.bzip2: -Mpfi(pass 1) -Mpfo(pass 2) -fast -O4
  -Msmartralloc=huge:150 -Mnounroll -tp barcelona-64
  -Bstatic_pgi

403.gcc: -march=barcelona -fb_create fbdata(pass 1)
  -fb_opt fbdata(pass 2) -m32 -O3 -OPT:Ofast

429.mcf: -fastsse -Mipa=jobs:4 -Mipa=fast -Mipa=inline:1
  -Msmartralloc=huge:150 -tp barcelona -Bstatic_pgi

445.gobmk: -march=barcelona -fb_create fbdata(pass 1)
  -fb_opt fbdata(pass 2) -O3 -OPT:alias=restrict -LNO:opt=0
  -CG:p2align=on

456.hmmer: -fastsse -Munroll=n:8 -Msmartralloc=huge:150 -Mfprelaxed
  -Mvect=partial -Msafepr -Mipa=jobs:4 -Mipa=const
  -Mipa=ptr -Mipa=arg -Mipa=inline -tp barcelona-64
  -Bstatic_pgi

458.sjeng: -Mpfi(pass 1) -Mipa=jobs:4(pass 2) -Mipa=fast(pass 2)
  -Mipa=inline:1(pass 2) -Mipa=noarg(pass 2) -Mpfo(pass 2)
  -fastsse -Msmartralloc=huge:150 -Mfprelaxed
  -tp barcelona-64 -Bstatic_pgi

462.libquantum: -fastsse -Mfprelaxed -Msmartralloc=huge:150 -Munroll=m:8
  -Mipa=jobs:4 -Mipa=fast -Mipa=inline -Mipa=noarg
  -tp barcelona-64 -Bstatic_pgi

464.h264ref: -Mpfi=indirect(pass 1) -Mipa=jobs:4(pass 2)
  -Mipa=fast(pass 2) -Mipa=inline(pass 2)
  -Mpfo=indirect(pass 2) -fastsse -Msmartralloc=huge:150
  -Mfprelaxed -tp barcelona-64 -Bstatic_pgi
```

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sun Microsystems
Sun Fire X4140

SPECint2006 = 14.4
SPECint_base2006 = 12.4

CPU2006 license: 6

Test sponsor: Sun Microsystems

Tested by: Sun Microsystems

Test date: May-2008

Hardware Availability: May-2008

Software Availability: May-2008

Peak Optimization Flags (Continued)

C++ benchmarks:

471.omnetpp: basepeak = yes

473.astar: basepeak = yes

483.xalancbmk: -march=barcelona -Ofast -m32 -OPT:unroll_times_max=8
-CG:push_pop_int_saved_regs=off -CG:ptr_load_use=0
-lsmartheap

Peak Other Flags

C benchmarks (except as noted below):

-w

400.perlbench: No flags used

403.gcc: No flags used

445.gobmk: No flags used

C++ benchmarks (except as noted below):

-w

483.xalancbmk: -L/root/work/cpu2006/amd123GH.libs/32

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/amd123GH-flags.20090713.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/amd123GH-flags.20090713.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.

Report generated on Tue Jul 22 17:31:35 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 11 June 2008.