SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

Bull Escala PL1660 (4.2 GHz, 16 cores)

SPECfp®_rate2006 = 400

SPECfp_rate_base2006 = 350

CPU2006 license: 20
Test sponsor: Bull SAS
Tested by: Bull SAS

Test date: Jun-2008
Hardware Availability: Mar-2008
Software Availability: Oct-2007

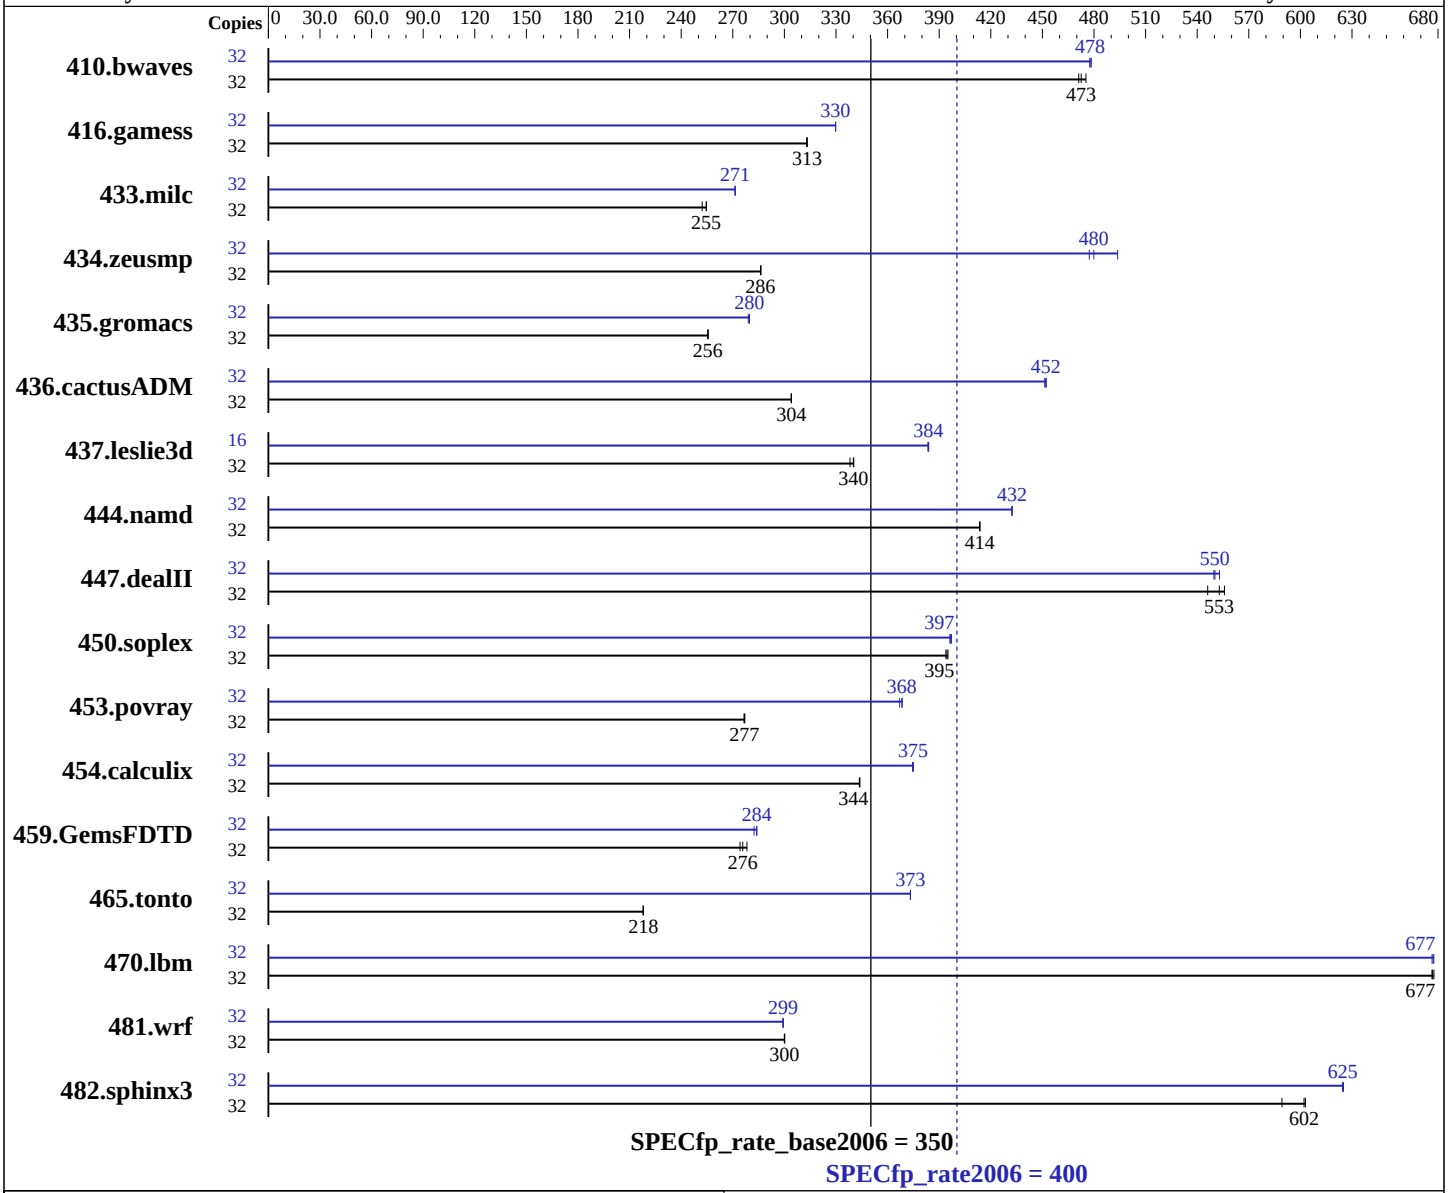

Hardware

CPU Name:	POWER6
CPU Characteristics:	
CPU MHz:	4200
FPU:	Integrated
CPU(s) enabled:	16 cores, 8 chips, 2 cores/chip, 2 threads/core
CPU(s) orderable:	4,8,12,16 cores (1 to 4 drawers with 2 chips)
Primary Cache:	64 KB I + 64 KB D on chip per core
Secondary Cache:	4 MB I+D on chip per core

Continued on next page

Software

Operating System:	IBM AIX 5L V5.3 updated with the 5300-07 Technology Level
Compiler:	XL C/C++ Enterprise Edition V9 for AIX Updated with the Oct2007 PTF. XL Fortran Enterprise Edition V11.1 for AIX Updated with the Oct2007 PTF.
Auto Parallel:	No
File System:	AIX/JFS2
System State:	Multi-user

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

Bull Escala PL1660 (4.2 GHz, 16 cores)

SPECfp_rate2006 = 400

SPECfp_rate_base2006 = 350

CPU2006 license: 20
Test sponsor: Bull SAS
Tested by: Bull SAS

Test date: Jun-2008
Hardware Availability: Mar-2008
Software Availability: Oct-2007

L3 Cache: 32 MB I+D off chip per chip
Other Cache: None
Memory: 128 GB (64x2 GB) DDR2 667 MHz
Disk Subsystem: 2x73 GB SAS 15K RPM
Other Hardware: None

Base Pointers: 32-bit
Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	32	923	471	**920**	**473**	915	475	32	911	478	**910**	**478**	909	478
416.gamess	32	2002	313	**2001**	**313**	2000	313	32	1900	330	1900	330	**1900**	**330**
433.milc	32	1165	252	1154	255	**1154**	**255**	32	1082	271	1083	271	**1082**	**271**
434.zeusmp	32	1018	286	1017	286	**1018**	**286**	32	610	477	590	494	**607**	**480**
435.gromacs	32	**894**	**256**	894	255	894	256	32	**817**	**280**	817	280	819	279
436.cactusADM	32	**1258**	**304**	1258	304	1257	304	32	846	452	**846**	**452**	847	451
437.leslie3d	32	889	338	884	340	**884**	**340**	16	**392**	**384**	392	383	392	384
444.namd	32	620	414	621	414	**621**	**414**	32	**594**	**432**	594	432	594	432
447.dealII	32	**662**	**553**	670	546	659	556	32	666	550	**665**	**550**	662	553
450.soplex	32	675	395	678	394	**676**	**395**	32	674	396	672	397	**673**	**397**
453.povray	32	616	277	**615**	**277**	615	277	32	462	369	464	367	**462**	**368**
454.calculix	32	**768**	**344**	768	344	768	344	32	705	375	704	375	**704**	**375**
459.GemsFDTD	32	1238	274	**1231**	**276**	1220	278	32	**1196**	**284**	1202	282	1196	284
465.tonto	32	**1444**	**218**	1444	218	1445	218	32	843	373	844	373	**844**	**373**
470.lbm	32	650	676	**650**	**677**	649	678	32	650	677	**649**	**677**	649	678
481.wrf	32	**1191**	**300**	1191	300	1192	300	32	1194	299	1195	299	**1194**	**299**
482.sphinx3	32	1034	603	**1036**	**602**	1058	589	32	**998**	**625**	999	624	998	625

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

General Notes

```
See flags file of details on following settings.
all ulimits set to unlimited.
Envionment variables set before executing benchmarks:
  MALLOCOPTIONS=pool
  MEMORY_AFFINITY=MCM
  XLFRTEOPTS=intrinthds=1
System set to "Enhanced" mode when defining partition on HMC.
bindprocessor command used on submit to bind each copy to a
  unique processor.
Remote console disabled in /etc/inittab
4000 16M large pages defined with vmo command
fdpr binary optimization tool used for:
  410.bwaves 433.milc 435.gromacs 436.cactusADM
  453.povray 470.lbm 482.sphinx3
```

Base Compiler Invocation

C benchmarks:
```
/usr/vac/bin/xlc -qlanglvl=extc99
```

C++ benchmarks:
```
/usr/vacpp/bin/xlC
```

Fortran benchmarks:
```
/usr/bin/xlf95
```

Benchmarks using both Fortran and C:
```
/usr/vac/bin/xlc -qlanglvl=extc99 /usr/bin/xlf95
```

Base Portability Flags

410.bwaves: `-qfixed`
416.gamess: `-qfixed`
434.zeusmp: `-qfixed`
435.gromacs: `-qfixed -qextname`
436.cactusADM: `-qfixed -qextname`
437.leslie3d: `-qfixed`
454.calculix: `-qfixed -qextname`
481.wrf: `-DSPEC_CPU_AIX -DNOUNDERSCORE`
482.sphinx3: `-qchars=signed`

Base Optimization Flags

C benchmarks:
```
-bmaxdata:0x40000000 -O5 -qlargepage -D_ILS_MACROS -blpdata
```

C++ benchmarks:
```
-bmaxdata:0x50000000 -O5 -qlargepage -D_ILS_MACROS -qrtti=all
-D__IBM_FAST_VECTOR -blpdata
```

Fortran benchmarks:
```
-bmaxdata:0x60000000 -O5 -qlargepage -qsmallstack=dynlenonheap
-qalias=nostd -blpdata
```

Benchmarks using both Fortran and C:
```
-bmaxdata:0x60000000 -O5 -qlargepage -D_ILS_MACROS
-qsmallstack=dynlenonheap -qalias=nostd -blpdata
```

Base Other Flags

C benchmarks:
```
-qipa=noobject -qipa=threads -qsuppress=1500-036
```

C++ benchmarks:
```
-qipa=noobject -qipa=threads -qsuppress=1500-036
```

Fortran benchmarks:
```
-qipa=noobject -qsuppress=1500-010 -qsuppress=cmpmsg -qipa=threads
-qsuppress=1500-036
```

Benchmarks using both Fortran and C:
```
-qipa=noobject -qsuppress=1500-010 -qsuppress=cmpmsg -qipa=threads
-qsuppress=1500-036
```

Peak Compiler Invocation

C benchmarks:
```
/usr/vac/bin/xlc -qlanglvl=extc99
```

C++ benchmarks:
```
/usr/vacpp/bin/xlC
```

Fortran benchmarks:
```
/usr/bin/xlf95
```

Benchmarks using both Fortran and C:
```
/usr/vac/bin/xlc -qlanglvl=extc99 /usr/bin/xlf95
```

Peak Portability Flags

410.bwaves: `-qfixed`
416.gamess: `-qfixed`
434.zeusmp: `-qfixed`
435.gromacs: `-qfixed -qextname`
436.cactusADM: `-qfixed -qextname`
437.leslie3d: `-qfixed`
454.calculix: `-qfixed -qextname`
481.wrf: `-DSPEC_CPU_AIX -DNOUNDERSCORE`
482.sphinx3: `-qchars=signed`

Peak Optimization Flags

C benchmarks:

Continued on next page

Peak Optimization Flags (Continued)

433.milc: -bmaxdata:0x40000000 -O5 -qlargepage -D_ILS_MACROS -qalign=natural -qfdpr -blpdata

470.lbm: -O5 -qlargepage -D_ILS_MACROS -qfdpr -q64 -blpdata

482.sphinx3: -qpdf1(pass 1) -qpdf2(pass 2) -O4 -qlargepage -qenablevmx -qvecnvol -D_ILS_MACROS -qfdpr -blpdata

C++ benchmarks:

444.namd: -qpdf1(pass 1) -qpdf2(pass 2) -O5 -D_ILS_MACROS

447.dealII: -bmaxdata:0x50000000 -O5 -qlargepage -D_ILS_MACROS -qrtti=all -D__IBM_FAST_VECTOR -blpdata

450.soplex: -bmaxdata:0x40000000 -qpdf1(pass 1) -qpdf2(pass 2) -O4 -qlargepage -qenablevmx -qvecnvol -qstrict -D_ILS_MACROS -blpdata

453.povray: -qpdf1(pass 1) -qpdf2(pass 2) -O5 -qlargepage -qenablevmx -qvecnvol -D_ILS_MACROS -qalign=natural -qfdpr -blpdata

Fortran benchmarks:

410.bwaves: -bmaxdata:0x50000000 -O5 -qlargepage -qenablevmx -qvecnvol -qfdpr -qsmallstack=dynlenonheap -blpdata

416.gamess: -bmaxdata:0x40000000 -qpdf1(pass 1) -qpdf2(pass 2) -O5 -qalias=nostd

434.zeusmp: -bmaxdata:0x40000000 -qpdf1(pass 1) -qpdf2(pass 2) -O3 -qarch=auto -qtune=auto -qlargepage -qenablevmx -qvecnvol -qxlf90=nosignedzero -blpdata

437.leslie3d: -O4 -qlargepage -q64 -blpdata

459.GemsFDTD: -qpdf1(pass 1) -qpdf2(pass 2) -O5 -qlargepage -qenablevmx -qvecnvol -q64 -blpdata

465.tonto: -bmaxdata:0x20000000 -qpdf1(pass 1) -qpdf2(pass 2) -O5 -qlargepage -blpdata

Benchmarks using both Fortran and C:

435.gromacs: -qpdf1(pass 1) -qpdf2(pass 2) -O5 -qlargepage -qenablevmx -qvecnvol -qfdpr -D_ILS_MACROS -blpdata

436.cactusADM: -bmaxdata:0x60000000 -qpdf1(pass 1) -qpdf2(pass 2) -O2 -qarch=auto -qtune=auto -qlargepage -qenablevmx -qvecnvol -qfdpr -qnostrict -D_ILS_MACROS -blpdata

Continued on next page

Peak Optimization Flags (Continued)

454.calculix: `-qpdf1`(pass 1) `-qpdf2`(pass 2) `-O4 -qlargepage -D_ILS_MACROS -blpdata`

481.wrf: `-bmaxdata:0x30000000 -O5 -qlargepage -qalias=nostd -D_ILS_MACROS -blpdata`

Peak Other Flags

C benchmarks:
`-qipa=noobject -qipa=threads -qsuppress=1500-036`

C++ benchmarks:
`-qipa=noobject -qipa=threads -qsuppress=1500-036`

Fortran benchmarks:
`-qipa=noobject -qsuppress=1500-010 -qsuppress=cmpmsg -qipa=threads -qsuppress=1500-036`

Benchmarks using both Fortran and C:
`-qipa=noobject -qsuppress=1500-010 -qsuppress=cmpmsg -qipa=threads -qsuppress=1500-036`

The flags file that was used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/IBM-AIX-XL.html`

You can also download the XML flags source by saving the following link:
`http://www.spec.org/cpu2006/flags/IBM-AIX-XL.xml`

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Jul 22 20:05:31 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 22 July 2008.