SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

Dell Precision R5400 (Intel Xeon X5260, 3.33 GHz)

SPECint®_rate2006 = 73.4

SPECint_rate_base2006 = 68.1

CPU2006 license: 55
Test sponsor: Dell Inc.
Tested by: Dell Inc.

Test date: Jun-2008
Hardware Availability: Jul-2008
Software Availability: Mar-2008

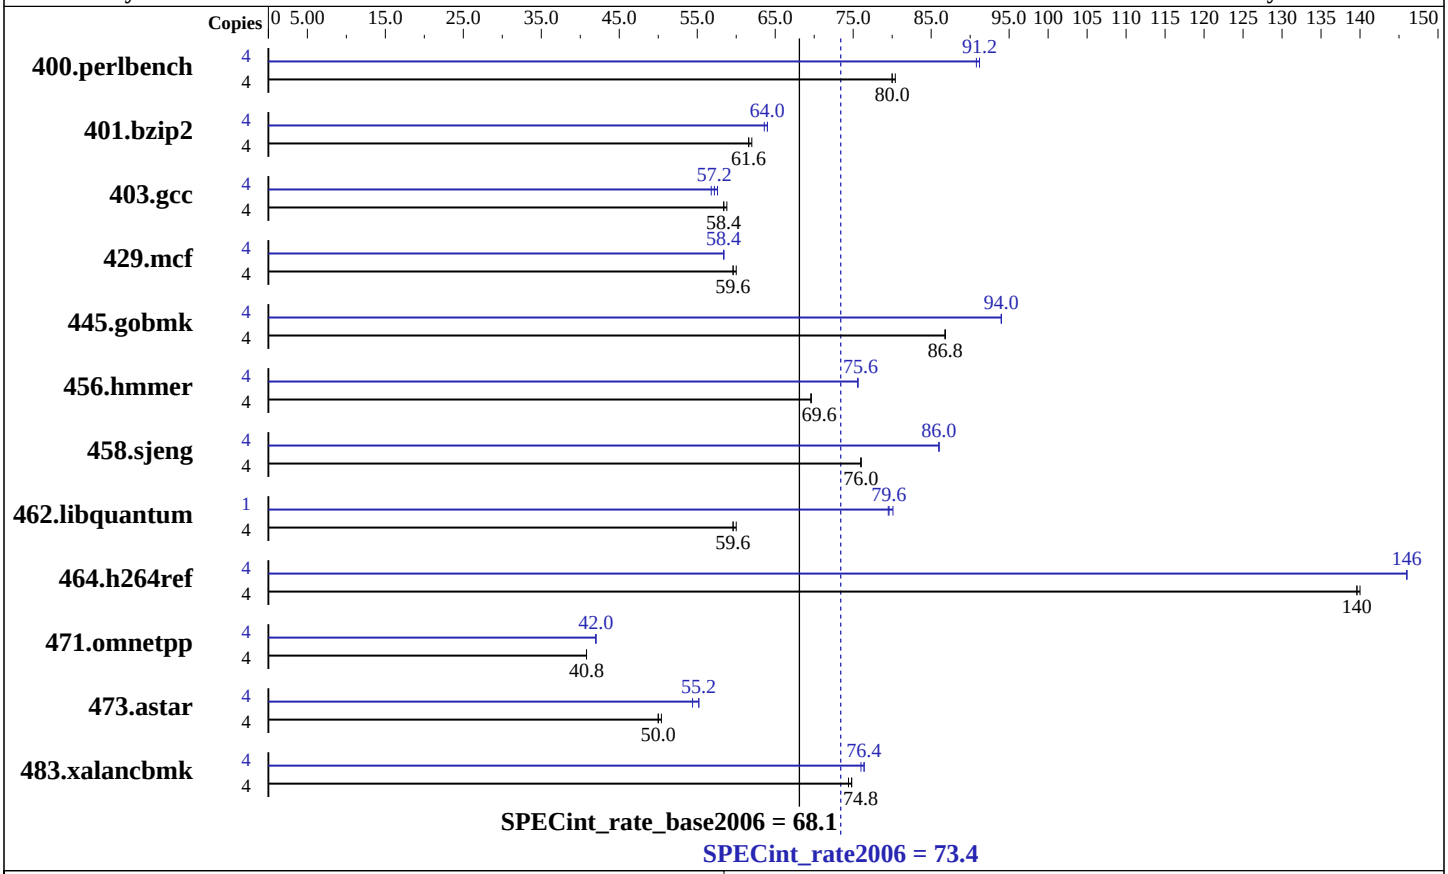

Hardware

CPU Name:	Intel Xeon X5260
CPU Characteristics:	1333 MHz Bus Speed
CPU MHz:	3333
FPU:	Integrated
CPU(s) enabled:	4 cores, 2 chips, 2 cores/chip
CPU(s) orderable:	1,2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	6 MB I+D on chip per chip
L3 Cache:	None
Other Cache:	None
Memory:	16 GB (4x4 GB 667 MHz CL5 FB-DIMM)
Disk Subsystem:	2 x 320 GB SATA 7200 RPM, RAID0
Other Hardware:	None

Software

Operating System:	Windows Vista Ultimate 64-bit
Compiler:	Intel C++ Compiler for IA-32, Version 10.1 Build 20080312 Package ID: w_cc_p_10.1.021 Microsoft Visual Studio 2005 SP1
Auto Parallel:	Yes
File System:	NTFS
System State:	Default
Base Pointers:	32-bit
Peak Pointers:	32-bit
Other Software:	MicroQuill SmartHeap Library 8.1

SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

Dell Precision R5400 (Intel Xeon X5260, 3.33 GHz)

SPECint_rate2006 = 73.4

SPECint_rate_base2006 = 68.1

CPU2006 license: 55
Test sponsor: Dell Inc.
Tested by: Dell Inc.

Test date: Jun-2008
Hardware Availability: Jul-2008
Software Availability: Mar-2008

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	4	**488**	**80.0**	485	80.4	488	80.0	4	**429**	**91.2**	431	90.8	428	91.2
401.bzip2	4	625	61.6	**625**	**61.6**	622	62.0	4	**604**	**64.0**	605	63.6	602	64.0
403.gcc	4	551	58.4	549	58.8	**551**	**58.4**	4	**563**	**57.2**	566	56.8	558	57.6
429.mcf	4	613	59.6	**612**	**59.6**	609	60.0	4	626	58.4	624	58.4	**626**	**58.4**
445.gobmk	4	483	86.8	485	86.8	**484**	**86.8**	4	447	94.0	447	94.0	**447**	**94.0**
456.hmmer	4	536	69.6	**536**	**69.6**	536	69.6	4	494	75.6	**494**	**75.6**	494	75.6
458.sjeng	4	636	76.0	636	76.0	**636**	**76.0**	4	**562**	**86.0**	563	86.0	562	86.0
462.libquantum	4	1380	60.0	**1386**	**59.6**	1389	59.6	1	**260**	**79.6**	259	80.1	261	79.5
464.h264ref	4	**633**	**140**	633	140	633	140	4	**606**	**146**	606	146	606	146
471.omnetpp	4	613	40.8	612	40.8	**612**	**40.8**	4	595	42.0	594	42.0	**595**	**42.0**
473.astar	4	558	50.4	**560**	**50.0**	560	50.0	4	509	55.2	**510**	**55.2**	515	54.4
483.xalancbmk	4	370	74.4	369	74.8	**370**	**74.8**	4	363	76.0	362	76.4	**362**	**76.4**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

General Notes

```
Binaries were built on Windows Vista Ultimate (64-bit)
BIOS Settings
  Adjacent Cache Line Prefetch set to ON
```

Base Compiler Invocation

C benchmarks:

```
icl -Qstd=c99
```

C++ benchmarks:

```
icl
```

Base Portability Flags

403.gcc: `-DSPEC_CPU_WIN32`
464.h264ref: `-DSPEC_CPU_NO_INTTYPES -DWIN32`
483.xalancbmk: `-Qoption,cpp,--no_wchar_t_keyword`

Base Optimization Flags

C benchmarks:
```
-fast -Qvec-guard-write /F512000000
```

C++ benchmarks:
```
-fast -Qcxx_features /F512000000 shlw32m.lib
              -link /FORCE:MULTIPLE
```

Base Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

Peak Compiler Invocation

C benchmarks:
```
icl -Qstd=c99
```

C++ benchmarks:
```
icl
```

Peak Portability Flags

403.gcc: `-DSPEC_CPU_WIN32`
464.h264ref: `-DSPEC_CPU_NO_INTTYPES -DWIN32`
483.xalancbmk: `-Qoption,cpp,--no_wchar_t_keyword`

Peak Optimization Flags

C benchmarks:

400.perlbench: `-Qprof_gen`(pass 1) `-Qprof_use`(pass 2) `-fast -Qansi-alias -Qprefetch /F512000000`

401.bzip2: `-Qprof_gen`(pass 1) `-Qprof_use`(pass 2) `-fast -Qprefetch /F512000000`

403.gcc: `-Qprof_gen`(pass 1) `-Qprof_use`(pass 2) `-fast /F512000000`

429.mcf: Same as 401.bzip2

Continued on next page

Peak Optimization Flags (Continued)

445.gobmk: -Qprof_gen(pass 1) -Qprof_use(pass 2) -QxT -O2 -Qipo -Qprec-div- -Qansi-alias /F512000000

456.hmmer: -Qprof_gen(pass 1) -Qprof_use(pass 2) -fast -Qunroll2 -Qansi-alias -Qopt-multi-version-aggressive /F512000000

458.sjeng: -Qprof_gen(pass 1) -Qprof_use(pass 2) -fast -Qunroll4 /F512000000

462.libquantum: -fast -Qunroll4 -Ob0 -Qprefetch -Qopt-streaming-stores:always -Qparallel -Qpar-runtime-control /F512000000 shlw32mt.lib

464.h264ref: -Qprof_gen(pass 1) -Qprof_use(pass 2) -fast -Qunroll2 -Qansi-alias /F512000000

C++ benchmarks:

471.omnetpp: -Qprof_gen(pass 1) -Qprof_use(pass 2) -fast -Qansi-alias -Qopt-ra-region-strategy=block -Qcxx_features /F512000000 shlw32m.lib -link /FORCE:MULTIPLE

473.astar: -Qprof_gen(pass 1) -Qprof_use(pass 2) -fast -Qansi-alias -Qopt-ra-region-strategy=routine -Qcxx_features /F512000000 shlw32m.lib -link /FORCE:MULTIPLE

483.xalancbmk: -Qprof_gen(pass 1) -Qprof_use(pass 2) -fast -Qansi-alias -Qcxx_features /F512000000 shlw32m.lib -link /FORCE:MULTIPLE

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags file that was used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/dell.ic10.1.windows.flags.20090713.00.html

You can also download the XML flags source by saving the following link:
http://www.spec.org/cpu2006/flags/dell.ic10.1.windows.flags.20090713.00.xml

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

Dell Precision R5400 (Intel Xeon X5260, 3.33 GHz)

SPECint_rate2006 = 73.4

SPECint_rate_base2006 = 68.1

CPU2006 license: 55
Test sponsor: Dell Inc.
Tested by: Dell Inc.

Test date: Jun-2008
Hardware Availability: Jul-2008
Software Availability: Mar-2008

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Tue Jul 22 19:50:42 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 8 July 2008.