SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated

Acer Altos R5250 (AMD Opteron 2360 SE)

SPECint®_rate2006 = 51.4

SPECint_rate_base2006 = 44.2

CPU2006 license: 97
Test sponsor: Acer Incorporated
Tested by: Acer Incorporated

Test date: Jun-2008
Hardware Availability: May-2008
Software Availability: May-2008

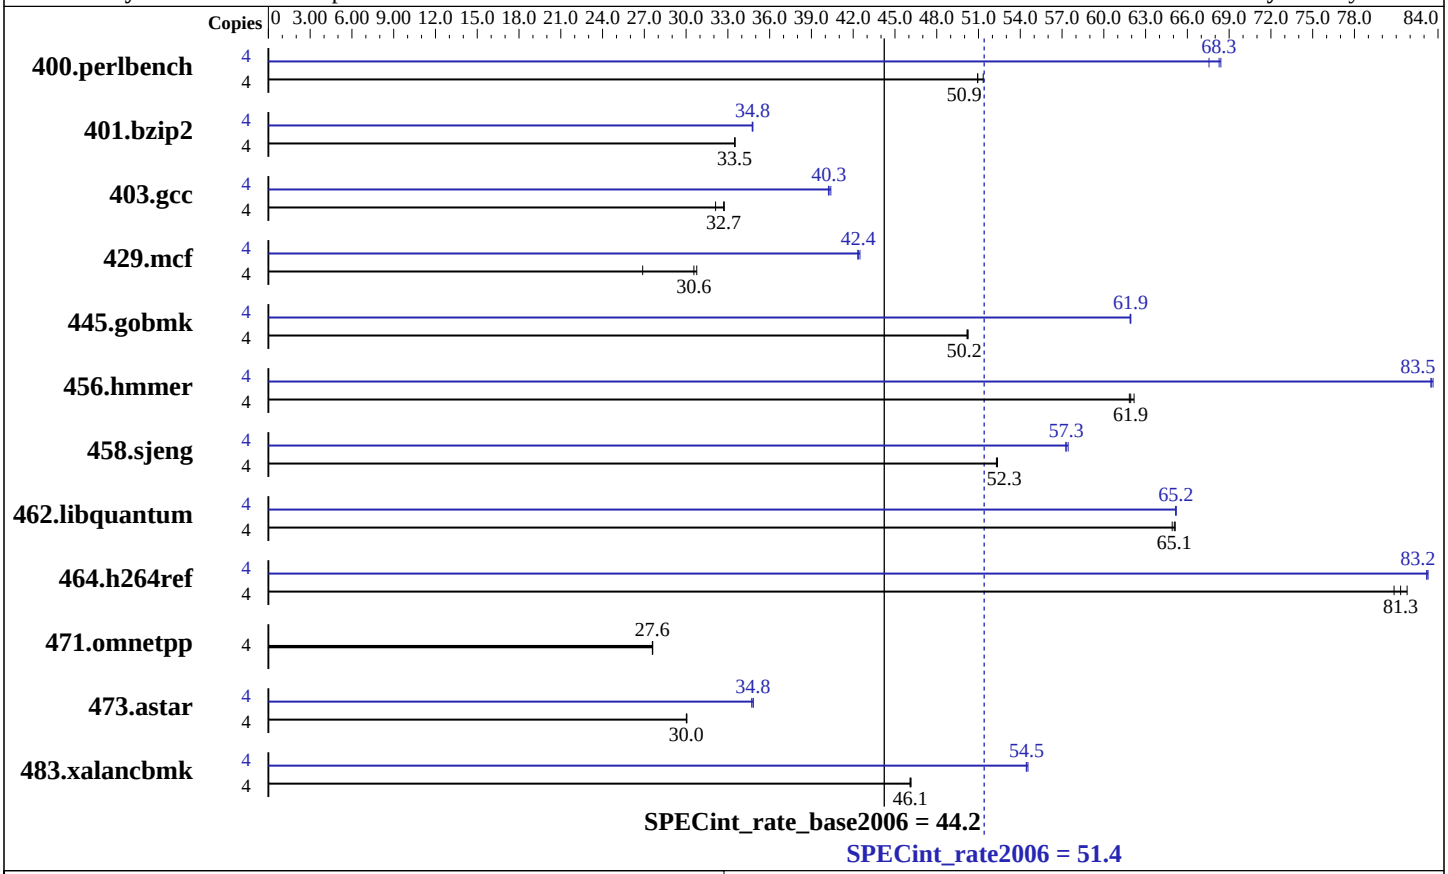

Hardware

CPU Name:	AMD Opteron 2360 SE
CPU Characteristics:	
CPU MHz:	2500
FPU:	Integrated
CPU(s) enabled:	4 cores, 1 chip, 4 cores/chip
CPU(s) orderable:	1,2 chips
Primary Cache:	64 KB I + 64 KB D on chip per core
Secondary Cache:	512 KB I+D on chip per core
L3 Cache:	2 MB I+D on chip per chip
Other Cache:	None
Memory:	8 GB (4x2GB, DDR2-667, CL5, Reg, Dual Rank)
Disk Subsystem:	1x160GB SATA, 7200 RPM
Other Hardware:	None

Software

Operating System:	SuSE Linux Enterprise Server 10 (x86_64) SP1, Kernel 2.6.16.46-0.12-smp
Compiler:	PGI Server Complete Version 7.2 PathScale Compiler Suite Version 3.1
Auto Parallel:	No
File System:	ReiserFS
System State:	Run level 3 (Full multiuser with network)
Base Pointers:	32/64-bit
Peak Pointers:	32/64-bit
Other Software:	SmartHeap 8.0 32-bit Library for Linux

SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated

Acer Altos R5250 (AMD Opteron 2360 SE)

SPECint_rate2006 = 51.4

SPECint_rate_base2006 = 44.2

CPU2006 license: 97
Test sponsor: Acer Incorporated
Tested by: Acer Incorporated

Test date: Jun-2008
Hardware Availability: May-2008
Software Availability: May-2008

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	4	761	51.3	767	50.9	**767**	**50.9**	4	578	67.6	571	68.4	**572**	**68.3**
401.bzip2	4	1152	33.5	**1152**	**33.5**	1152	33.5	4	1110	34.8	1111	34.7	**1110**	**34.8**
403.gcc	4	**985**	**32.7**	1003	32.1	983	32.7	4	801	40.2	797	40.4	**800**	**40.3**
429.mcf	4	1357	26.9	1186	30.8	**1194**	**30.6**	4	862	42.3	**861**	**42.4**	859	42.5
445.gobmk	4	836	50.2	**836**	**50.2**	835	50.3	4	677	61.9	678	61.9	**678**	**61.9**
456.hmmer	4	604	61.8	**603**	**61.9**	600	62.2	4	**447**	**83.5**	446	83.6	447	83.5
458.sjeng	4	924	52.4	926	52.3	**925**	**52.3**	4	843	57.4	845	57.3	**845**	**57.3**
462.libquantum	4	**1274**	**65.1**	1273	65.1	1277	64.9	4	**1271**	**65.2**	1272	65.2	1271	65.2
464.h264ref	4	1095	80.8	1082	81.8	**1089**	**81.3**	4	1063	83.3	1064	83.2	**1064**	**83.2**
471.omnetpp	4	907	27.6	**906**	**27.6**	906	27.6	4	907	27.6	**906**	**27.6**	906	27.6
473.astar	4	934	30.1	**935**	**30.0**	935	30.0	4	809	34.7	**807**	**34.8**	806	34.8
483.xalancbmk	4	598	46.2	599	46.1	**599**	**46.1**	4	507	54.4	506	54.6	**507**	**54.5**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

```
'numactl' was used to bind copies to the cores
Environment variable PGI_HUGE_PAGES set to 150
'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 1228800' was used to set environment locked pages in memory quantity
Set vm/nr_hugepages=600 in /etc/sysctl.conf
mount -t hugetlbfs nodev /mnt/hugepages
```

General Notes

```
This result was measured on the Acer Altos R5250
The Altos R5250 and Altos G5450 are electronically equivalent.
```

Base Compiler Invocation

C benchmarks:
pgcc

C++ benchmarks:
pgcpp

Base Portability Flags

400.perlbench: `-DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64`
401.bzip2: `-DSPEC_CPU_LP64`
403.gcc: `-DSPEC_CPU_LP64`
429.mcf: `-DSPEC_CPU_LP64`
445.gobmk: `-DSPEC_CPU_LP64`
456.hmmer: `-DSPEC_CPU_LP64`
458.sjeng: `-DSPEC_CPU_LP64`
462.libquantum: `-DSPEC_CPU_LP64 -DSPEC_CPU_LINUX`
464.h264ref: `-DSPEC_CPU_LP64`
483.xalancbmk: `-DSPEC_CPU_LINUX`

Base Optimization Flags

C benchmarks:
`-fast -Mipa=fast -Mipa=inline -Mfprelaxed -Msmartalloc=huge:150 -tp barcelona-64 -Bstatic_pgi`

C++ benchmarks:
`-fastsse -Mipa=fast -Mipa=inline -Mfprelaxed -Msmartalloc=huge:150 --zc_eh -tp barcelona -Bstatic_pgi`

Base Other Flags

C benchmarks:
`-w -Mipa=jobs:4`

C++ benchmarks:
`-w -Mipa=jobs:4`

Peak Compiler Invocation

C benchmarks (except as noted below):
`pgcc`

400.perlbench: `pathcc`

403.gcc: `pathcc`

445.gobmk: `pathcc`

C++ benchmarks (except as noted below):
`pathCC`

Continued on next page

Peak Compiler Invocation (Continued)

471.omnetpp: pgcpp

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -IPA:plimit=20000 -LNO:opt=0
-WOPT:if_conv=0 -CG:local_sched_alg=1

401.bzip2: -Mpfi(pass 1) -Mpfo(pass 2) -fast -O4
-Msmartalloc=huge:150 -Mnounroll -tp barcelona-64
-Bstatic_pgi

403.gcc: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -m32 -O3 -OPT:Ofast

429.mcf: -fastsse -Mipa=fast -Mipa=inline:1 -Msmartalloc=huge:150
-tp barcelona -Bstatic_pgi

445.gobmk: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -O3 -OPT:alias=restrict -LNO:opt=0
-CG:p2align=on

456.hmmer: -fastsse -Munroll=n:8 -Msmartalloc=huge:150 -Mfprelaxed
-Mvect=partial -Msafeptr -Mipa=const -Mipa=ptr -Mipa=arg
-Mipa=inline -tp barcelona-64 -Bstatic_pgi

458.sjeng: -Mpfi(pass 1) -Mipa=fast(pass 2) -Mipa=inline:1(pass 2)
-Mipa=noarg(pass 2) -Mpfo(pass 2) -fastsse
-Msmartalloc=huge:150 -Mfprelaxed -tp barcelona-64
-Bstatic_pgi

462.libquantum: -fastsse -Mfprelaxed -Msmartalloc=huge:150 -Munroll=m:8
-Mipa=fast -Mipa=inline -Mipa=noarg -tp barcelona-64
-Bstatic_pgi

Continued on next page

Peak Optimization Flags (Continued)

464.h264ref: `-Mpfi=indirect`(pass 1) `-Mipa=fast`(pass 2) `-Mipa=inline`(pass 2) `-Mpfo=indirect`(pass 2) `-fastsse` `-Msmartalloc=huge:150` `-Mfprelaxed` `-tp barcelona-64` `-Bstatic_pgi`

C++ benchmarks:

471.omnetpp: `basepeak = yes`

473.astar: `-march=barcelona -Ofast -TENV:frame_pointer=off` `-WOPT:if_conv=0 -GRA:optimize_boundary=on -IPA:plimit=525` `-m32 -lsmartheap`

483.xalancbmk: `-march=barcelona -Ofast -m32 -OPT:unroll_times_max=8` `-CG:push_pop_int_saved_regs=off -CG:ptr_load_use=0` `-lsmartheap`

Peak Other Flags

C benchmarks (except as noted below):
`-w -Mipa=jobs:4`(pass 2)

400.perlbench: `No flags used`

401.bzip2: `-w`

403.gcc: `No flags used`

445.gobmk: `No flags used`

C++ benchmarks (except as noted below):
`-L/root/work/cpu2006/amd123GH.libs/32`

471.omnetpp: `-w -Mipa=jobs:4`

The flags file that was used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/amd123GH-flags.20090713.01.html`

You can also download the XML flags source by saving the following link:
`http://www.spec.org/cpu2006/flags/amd123GH-flags.20090713.01.xml`

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated

Acer Altos R5250 (AMD Opteron 2360 SE)

SPECint_rate2006 = 51.4

SPECint_rate_base2006 = 44.2

CPU2006 license: 97
Test sponsor: Acer Incorporated
Tested by: Acer Incorporated

Test date: Jun-2008
Hardware Availability: May-2008
Software Availability: May-2008

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Jul 22 18:39:23 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 23 July 2008.