



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Limited

SPECint®\_rate2006 = 135

Fujitsu SPARC Enterprise M4000

SPECint\_rate\_base2006 = 118

CPU2006 license: 19


Test date: Jul-2008

Test sponsor: Fujitsu Limited

Hardware Availability: Jul-2008

Tested by: Sun Microsystems

Software Availability: Jul-2008

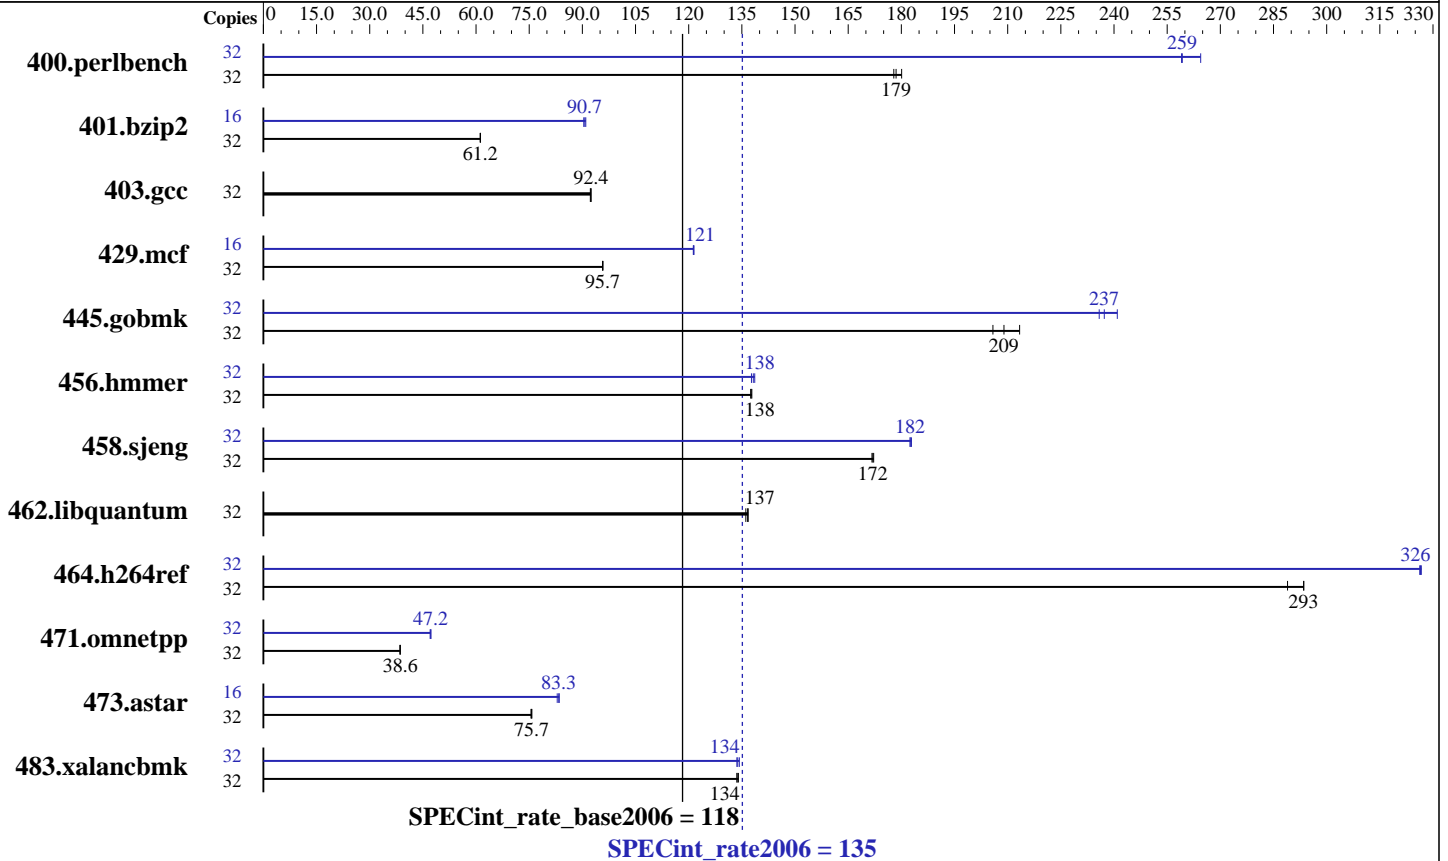

### Hardware

CPU Name: SPARC64 VII  
 CPU Characteristics:  
 CPU MHz: 2400  
 FPU: Integrated  
 CPU(s) enabled: 16 cores, 4 chips, 4 cores/chip, 2 threads/core  
 CPU(s) orderable: 1 to 2 CPUM; each CPUM contains 2 CPU chips  
 Primary Cache: 64 KB I + 64 KB D on chip per core  
 Secondary Cache: 5 MB I+D on chip per chip  
 L3 Cache: None  
 Other Cache: None  
 Memory: 64 GB (32 x 2 GB)  
 Disk Subsystem: 591 GB RAID 5 Sun StorageTek 2540  
 10 x 73 GB 15K RPM Seagate SAS disks  
 Other Hardware: None

### Software

Operating System: Solaris 10 5/08 with patch 137111-03  
 Compiler: Sun Studio 12 with patches 124867-06, 124861-07, 124863-05 (see patch information below)  
 Auto Parallel: No  
 File System: ufs  
 System State: Default  
 Base Pointers: 32-bit  
 Peak Pointers: 32-bit  
 Other Software: None



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Limited

SPECint\_rate2006 = 135

Fujitsu SPARC Enterprise M4000

SPECint\_rate\_base2006 = 118

CPU2006 license: 19

Test date: Jul-2008

Test sponsor: Fujitsu Limited

Hardware Availability: Jul-2008

Tested by: Sun Microsystems

Software Availability: Jul-2008

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	32	<u>1751</u>	<u>179</u>	1736	180	1758	178	32	1182	264	1207	259	<u>1206</u>	<u>259</u>
401.bzip2	32	<u>5045</u>	<u>61.2</u>	5047	61.2	5041	61.3	16	<u>1702</u>	<u>90.7</u>	1708	90.4	1697	91.0
403.gcc	32	2792	92.3	<u>2787</u>	<u>92.4</u>	2787	92.4	32	2792	92.3	<u>2787</u>	<u>92.4</u>	2787	92.4
429.mcf	32	3046	95.8	3049	95.7	<u>3049</u>	<u>95.7</u>	16	<u>1202</u>	<u>121</u>	1203	121	1201	121
445.gobmk	32	1573	213	1631	206	<u>1607</u>	<u>209</u>	32	1393	241	1423	236	<u>1415</u>	<u>237</u>
456.hammer	32	<u>2169</u>	<u>138</u>	2171	137	2166	138	32	2168	138	<u>2160</u>	<u>138</u>	2154	139
458.sjeng	32	<u>2252</u>	<u>172</u>	2255	172	2249	172	32	2118	183	<u>2122</u>	<u>182</u>	2122	182
462.libquantum	32	<u>4853</u>	<u>137</u>	4847	137	4871	136	32	<u>4853</u>	<u>137</u>	4847	137	4871	136
464.h264ref	32	<u>2413</u>	<u>293</u>	2412	294	2451	289	32	2168	327	<u>2169</u>	<u>326</u>	2171	326
471.omnetpp	32	<u>5181</u>	<u>38.6</u>	5187	38.6	5181	38.6	32	4233	47.3	4251	47.1	<u>4235</u>	<u>47.2</u>
473.astar	32	2966	75.7	2975	75.5	<u>2968</u>	<u>75.7</u>	16	1346	83.5	1355	82.9	<u>1348</u>	<u>83.3</u>
483.xalancbmk	32	<u>1652</u>	<u>134</u>	1652	134	1647	134	32	<u>1650</u>	<u>134</u>	1644	134	1653	134

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Invocation Notes

Sun Studio compiler patches are available at  
[http://developers.sun.com/sunstudio/downloads/patches/ss12\\_patches.jsp](http://developers.sun.com/sunstudio/downloads/patches/ss12_patches.jsp)

## Submit Notes

Processes were assigned to specific processors using 'pbind' commands. The config file option 'submit' was used, along with a list of processors in the 'BIND' variable, to generate the pbind commands. (For details, please see the config file.)

## Operating System Notes

Environment Variable Settings:

```
ulimit -s 131072 was used to limit the space consumed
by the stack (making more space available for the heap)
```

System Tunables (/etc/system parameters):

```
tune_t_fsflushr=10
Controls how many seconds elapse between runs of the
page flush daemon, fsflush.
autoup=600
Causes pages older than the listed number of seconds to
be written by fsflush.
```

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Limited

SPECint\_rate2006 = 135

Fujitsu SPARC Enterprise M4000

SPECint\_rate\_base2006 = 118

CPU2006 license: 19

Test sponsor: Fujitsu Limited

Tested by: Sun Microsystems

Test date: Jul-2008

Hardware Availability: Jul-2008

Software Availability: Jul-2008

## Operating System Notes (Continued)

bufhwm=3000

Memory byte limit for caching I/O buffers

segmap\_percent=1

Set maximum percent memory for file system cache

Other System Settings:

The webconsole service was turned off using  
svcadm disable webconsole

## Platform Notes

Memory is 8-way interleaved by filling all slots with  
the same capacity DIMMs.

This result is measured on a Sun SPARC Enterprise M4000 Server.  
Note that the Sun SPARC Enterprise M4000 and Fujitsu SPARC Enterprise  
M4000 are electrically equivalent.

## Base Compiler Invocation

C benchmarks:

cc

C++ benchmarks:

CC

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_SOLARIS\_SPARC

403.gcc: -DSPEC\_CPU\_SOLARIS

462.libquantum: -DSPEC\_CPU\_SOLARIS

483.xalancbmk: -DSPEC\_CPU\_SOLARIS

## Base Optimization Flags

C benchmarks:

-fast -fma=fused -xipo=2 -xpagesize=4M -xarch=sparcfmaf

-xprefetch\_level=1 -xalias\_level=std -l12amm

C++ benchmarks:

-xdepend -library=stlport4 -fast -fma=fused -xipo=2 -xpagesize=4M

-xarch=sparcfmaf -xprefetch\_level=2 -xalias\_level=compatible -lfast



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Limited

SPECint\_rate2006 = 135

Fujitsu SPARC Enterprise M4000

SPECint\_rate\_base2006 = 118

CPU2006 license: 19

Test sponsor: Fujitsu Limited

Tested by: Sun Microsystems

Test date: Jul-2008

Hardware Availability: Jul-2008

Software Availability: Jul-2008

## Base Other Flags

C benchmarks:

-xjobs=16 -V -#

C++ benchmarks:

-xjobs=16 -verbose=diags,version

## Peak Compiler Invocation

C benchmarks:

cc

C++ benchmarks:

CC

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_SOLARIS\_SPARC

403.gcc: -DSPEC\_CPU\_SOLARIS

462.libquantum: -DSPEC\_CPU\_SOLARIS

483.xalancbmk: -DSPEC\_CPU\_SOLARIS

## Peak Optimization Flags

C benchmarks:

400.perlbench: -xprofile=collect:./feedback(pass 1)  
-xprofile=use:./feedback(pass 2) -fast -xpagesize=4M  
-xalias\_level=std -xipo=2 -xrestrict -fma=fused -lfast

401.bzip2: -xprofile=collect:./feedback(pass 1)  
-xprofile=use:./feedback(pass 2) -fast -xpagesize=4M  
-xalias\_level=strong -fma=fused

403.gcc: basepeak = yes

429.mcf: -fast -xpagesize=4M -xipo=2 -xprefetch=no -xrestrict  
-xalias\_level=std -lfast

445.gobmk: -xprofile=collect:./feedback(pass 1)  
-xprofile=use:./feedback(pass 2) -fast -xpagesize=4M  
-xalias\_level=std -xrestrict -fma=fused -xarch=sparcfmaf  
-l12amm

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Limited

SPECint\_rate2006 = 135

Fujitsu SPARC Enterprise M4000

SPECint\_rate\_base2006 = 118

CPU2006 license: 19

Test date: Jul-2008

Test sponsor: Fujitsu Limited

Hardware Availability: Jul-2008

Tested by: Sun Microsystems

Software Availability: Jul-2008

## Peak Optimization Flags (Continued)

456.hmmcr: -xprofile=collect:./feedback(pass 1)  
-xprofile=use:./feedback(pass 2) -fast -xpagesize=4M  
-xipo=2 -fma=fused

458.sjeng: Same as 456.hmmcr

462.libquantum: basepeak = yes

464.h264ref: -xprofile=collect:./feedback(pass 1)  
-xprofile=use:./feedback(pass 2) -fast -xpagesize=4M  
-xipo=2 -xalias\_level=std -xarch=sparcfmaf -xprefetch=no  
-ll2amm

C++ benchmarks:

471.omnetpp: -xdepend -library=stlport4  
-xprofile=collect:./feedback(pass 1)  
-xprofile=use:./feedback(pass 2) -fast -xpagesize=4M  
-xalias\_level=compatible -xipo=2 -xprefetch\_level=2  
-Qoption cg -Qlp-av=0 -fma=fused -lfast

473.astar: -xdepend -library=stlport4 -fast -xpagesize=4M  
-xalias\_level=compatible -xipo=2 -xprefetch\_level=2  
-fma=fused -lfast

483.xalancbmk: -xdepend -library=stlport4  
-xprofile=collect:./feedback(pass 1)  
-xprofile=use:./feedback(pass 2) -fast -xpagesize=4M  
-xalias\_level=compatible -xipo=2 -xprefetch=no -fma=fused  
-lfast

## Peak Other Flags

C benchmarks:  
-xjobs=16 -V -#

C++ benchmarks:  
-xjobs=16 -verbose=diags,version

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Sun-Solaris-Studio12-and-gccfss4.2.20090713.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Sun-Solaris-Studio12-and-gccfss4.2.20090713.xml>



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Limited

SPECint\_rate2006 = 135

Fujitsu SPARC Enterprise M4000

SPECint\_rate\_base2006 = 118

CPU2006 license: 19

Test sponsor: Fujitsu Limited

Tested by: Sun Microsystems

Test date: Jul-2008

Hardware Availability: Jul-2008

Software Availability: Jul-2008

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.  
Report generated on Tue Jul 22 18:46:33 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 5 August 2008.