SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge 2970 (AMD Opteron 2360 SE, 2.5 GHz)

SPECint®_rate2006 = 108

SPECint_rate_base2006 = 92.7

CPU2006 license: 55
Test sponsor: Dell Inc.
Tested by: Dell Inc.

Test date: Jun-2008
Hardware Availability: Jun-2008
Software Availability: Jun-2008

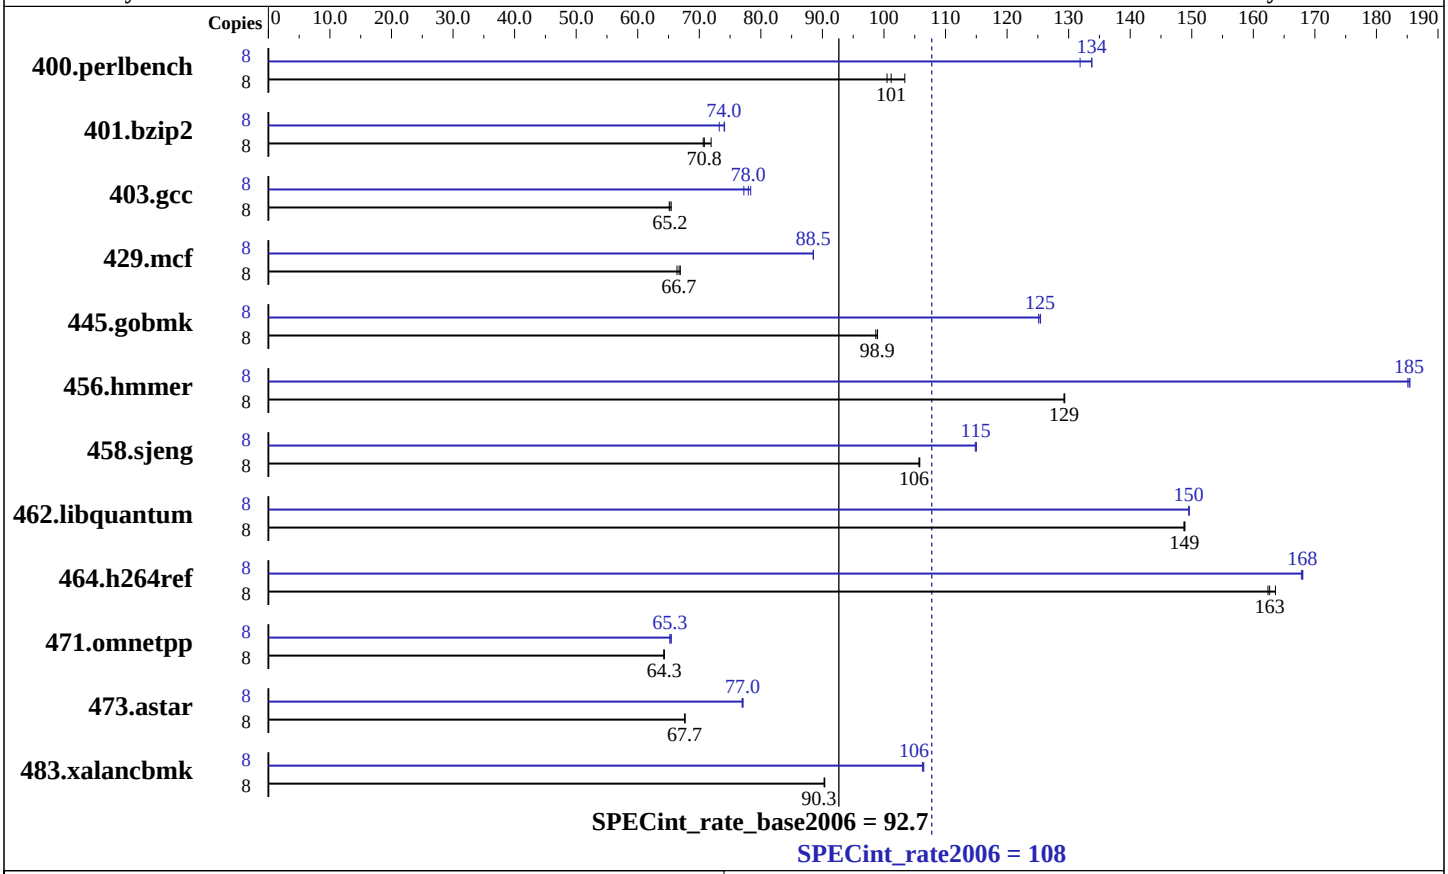

Hardware

CPU Name:	AMD Opteron 2360 SE
CPU Characteristics:	
CPU MHz:	2500
FPU:	Integrated
CPU(s) enabled:	8 cores, 2 chips, 4 cores/chip
CPU(s) orderable:	1,2 chips
Primary Cache:	64 KB I + 64 KB D on chip per core
Secondary Cache:	512 KB I+D on chip per core
L3 Cache:	2 MB I+D on chip per chip
Other Cache:	None
Memory:	16 GB (4 x 4GB, DDR2-667, CL5)
Disk Subsystem:	1 x 73GB 2.5" SAS 10000 RPM
Other Hardware:	None

Software

Operating System:	SUSE Linux Enterprise Server 10 (x86_64) SP1, Kernel 2.6.16.46-0.12-smp
Compiler:	PGI Server Complete Version 7.2 PathScale Compiler Suite Version 3.2
Auto Parallel:	No
File System:	ReiserFS
System State:	Run level 3 (multi-user)
Base Pointers:	32/64-bit
Peak Pointers:	32/64-bit
Other Software:	SmartHeap 8.0 32-bit Library for Linux

SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge 2970 (AMD Opteron 2360 SE, 2.5 GHz)

SPECint_rate2006 = 108

SPECint_rate_base2006 = 92.7

CPU2006 license: 55
Test sponsor: Dell Inc.
Tested by: Dell Inc.

Test date: Jun-2008
Hardware Availability: Jun-2008
Software Availability: Jun-2008

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	8	756	103	**773**	**101**	778	100	8	593	132	**584**	**134**	584	134
401.bzip2	8	1073	71.9	1093	70.6	**1090**	**70.8**	8	1054	73.2	1042	74.1	**1043**	**74.0**
403.gcc	8	984	65.4	**987**	**65.2**	989	65.1	8	822	78.4	834	77.2	**826**	**78.0**
429.mcf	8	1099	66.4	**1094**	**66.7**	1090	66.9	8	**824**	**88.5**	824	88.5	824	88.6
445.gobmk	8	**848**	**98.9**	851	98.7	848	99.0	8	669	125	671	125	**669**	**125**
456.hmmer	8	577	129	**577**	**129**	577	129	8	403	185	**403**	**185**	402	185
458.sjeng	8	916	106	915	106	**915**	**106**	8	842	115	**842**	**115**	843	115
462.libquantum	8	1115	149	1113	149	**1114**	**149**	8	1108	150	**1108**	**150**	1108	150
464.h264ref	8	1082	164	**1088**	**163**	1090	162	8	1054	168	1055	168	**1054**	**168**
471.omnetpp	8	778	64.3	**778**	**64.3**	778	64.2	8	764	65.5	**766**	**65.3**	766	65.2
473.astar	8	**830**	**67.7**	830	67.6	830	67.7	8	**729**	**77.0**	728	77.1	730	77.0
483.xalancbmk	8	611	90.4	**611**	**90.3**	611	90.3	8	520	106	**519**	**106**	518	106

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

```
'numactl' was used to bind copies to the cores
Environment variable PGI_HUGE_PAGES set to 150
'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2097152'  was used to set environment locked pages in memory limit
mount -t hugetlbfs nodev /mnt/hugepages
Set vm/nr_hugepages=1200 in /etc/sysctl.conf
```

Base Compiler Invocation

C benchmarks:
`pgcc`

C++ benchmarks:
`pgcpp`

Base Portability Flags

400.perlbench: `-DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64`
401.bzip2: `-DSPEC_CPU_LP64`
403.gcc: `-DSPEC_CPU_LP64`
429.mcf: `-DSPEC_CPU_LP64`
445.gobmk: `-DSPEC_CPU_LP64`
456.hmmer: `-DSPEC_CPU_LP64`

Continued on next page

Base Portability Flags (Continued)

458.sjeng: `-DSPEC_CPU_LP64`
462.libquantum: `-DSPEC_CPU_LP64 -DSPEC_CPU_LINUX`
464.h264ref: `-DSPEC_CPU_LP64`
471.omnetpp: `-DSPEC_CPU_LP64`
473.astar: `-DSPEC_CPU_LP64`
483.xalancbmk: `-DSPEC_CPU_LP64 -DSPEC_CPU_LINUX`

Base Optimization Flags

C benchmarks:
`-fastsse -Msmartalloc=huge:150 -Mfprelaxed -Mipa=fast -Mipa=inline -tp barcelona-64 -Bstatic_pgi`

C++ benchmarks:
`-fastsse -Msmartalloc=huge:150 -Mfprelaxed --zc_eh -Mipa=fast -Mipa=inline -tp barcelona -Bstatic_pgi`

Base Other Flags

C benchmarks:
`-Mipa=jobs:4`

C++ benchmarks:
`-Mipa=jobs:4`

Peak Compiler Invocation

C benchmarks (except as noted below):
`pgcc`

400.perlbench: `pathcc`

403.gcc: `pathcc`

445.gobmk: `pathcc`

464.h264ref: `pathcc`

C++ benchmarks (except as noted below):
`pathCC`

473.astar: `pgcpp`

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -IPA:plimit=20000 -LNO:opt=0
-WOPT:if_conv=0 -CG:local_sched_alg=1

401.bzip2: -Mpfi=indirect(pass 1) -Mpfo=indirect(pass 2) -fastsse -O4
-Msmartalloc=huge:150 -Mprefetch=t0 -Mnounroll
-tp barcelona-64 -Bstatic_pgi

403.gcc: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -O3 -OPT:Ofast -m32

429.mcf: -fastsse -Msmartalloc=huge:150 -Mipa=fast -Mipa=inline:1
-tp barcelona -Bstatic_pgi

445.gobmk: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -O3 -OPT:alias=restrict
-LNO:prefetch=1 -LNO:ignore_feedback=off -CG:p2align=on

456.hmmer: -fastsse -Mvect=partial -Munroll=n:8 -Msmartalloc=huge:150
-Msafeptr -Mprefetch=t0 -Mfprelaxed -Mipa=const -Mipa=ptr
-Mipa=arg -Mipa=inline -tp barcelona-64 -Bstatic_pgi

458.sjeng: -Mpfi(pass 1) -Mpfo(pass 2) -Mipa=fast(pass 2)
-Mipa=inline:1(pass 2) -Mipa=noarg(pass 2) -fastsse
-Msmartalloc=huge:150 -Mfprelaxed -tp barcelona-64
-Bstatic_pgi

462.libquantum: -fastsse -Munroll=m:8 -Msmartalloc=huge:150
-Mprefetch=distance:4 -Mfprelaxed -Mipa=fast -Mipa=inline
-Mipa=noarg -tp barcelona-64 -Bstatic_pgi

464.h264ref: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -O3 -IPA:plimit=20000
-OPT:alias=disjoint -LNO:prefetch=0 -CG:ptr_load_use=0
-CG:push_pop_int_saved_regs=off

Continued on next page

Peak Optimization Flags (Continued)

C++ benchmarks:

471.omnetpp: `-march=barcelona -Ofast -CG:gcm=off -INLINE:aggressive=on -OPT:alias=disjoint -WOPT:if_conv=0 -m32 -lsmartheap`

473.astar: `-Mpfi`(pass 1) `-Mpfo`(pass 2) `-Mipa=fast`(pass 2) `-Mipa=inline:6`(pass 2) `-fastsse -O4 -Msmartalloc=huge:150 -Msafeptr=global -Mfprelaxed --zc_eh -tp barcelona -Bstatic_pgi`

483.xalancbmk: `-march=barcelona -Ofast -OPT:unroll_times_max=8 -CG:push_pop_int_saved_regs=off -CG:ptr_load_use=0 -m32 -lsmartheap`

Peak Other Flags

C benchmarks:

429.mcf: `-Mipa=jobs:4`

456.hmmer: `-Mipa=jobs:4`

458.sjeng: `-Mipa=jobs:4`(pass 2)

462.libquantum: `-Mipa=jobs:4`

C++ benchmarks (except as noted below):
`-L/root/work/cpu2006-amd421gh/amd421gh.libs/32`

473.astar: `-Mipa=jobs:4`(pass 2)

The flags file that was used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/amd421GH-flags.20090713.01.html`

You can also download the XML flags source by saving the following link:
`http://www.spec.org/cpu2006/flags/amd421GH-flags.20090713.01.xml`

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge 2970 (AMD Opteron 2360 SE, 2.5 GHz)

SPECint_rate2006 = 108

SPECint_rate_base2006 = 92.7

CPU2006 license: 55
Test sponsor: Dell Inc.
Tested by: Dell Inc.

Test date: Jun-2008
Hardware Availability: Jun-2008
Software Availability: Jun-2008

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Jul 22 19:22:38 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 19 August 2008.