



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

**SPECint®\_rate2006 = 106**

PowerEdge M805 (AMD Opteron 2360 SE, 2.5 GHz)

**SPECint\_rate\_base2006 = 91.9**

CPU2006 license: 55


Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date: Aug-2008

Hardware Availability: Aug-2008

Software Availability: May-2008

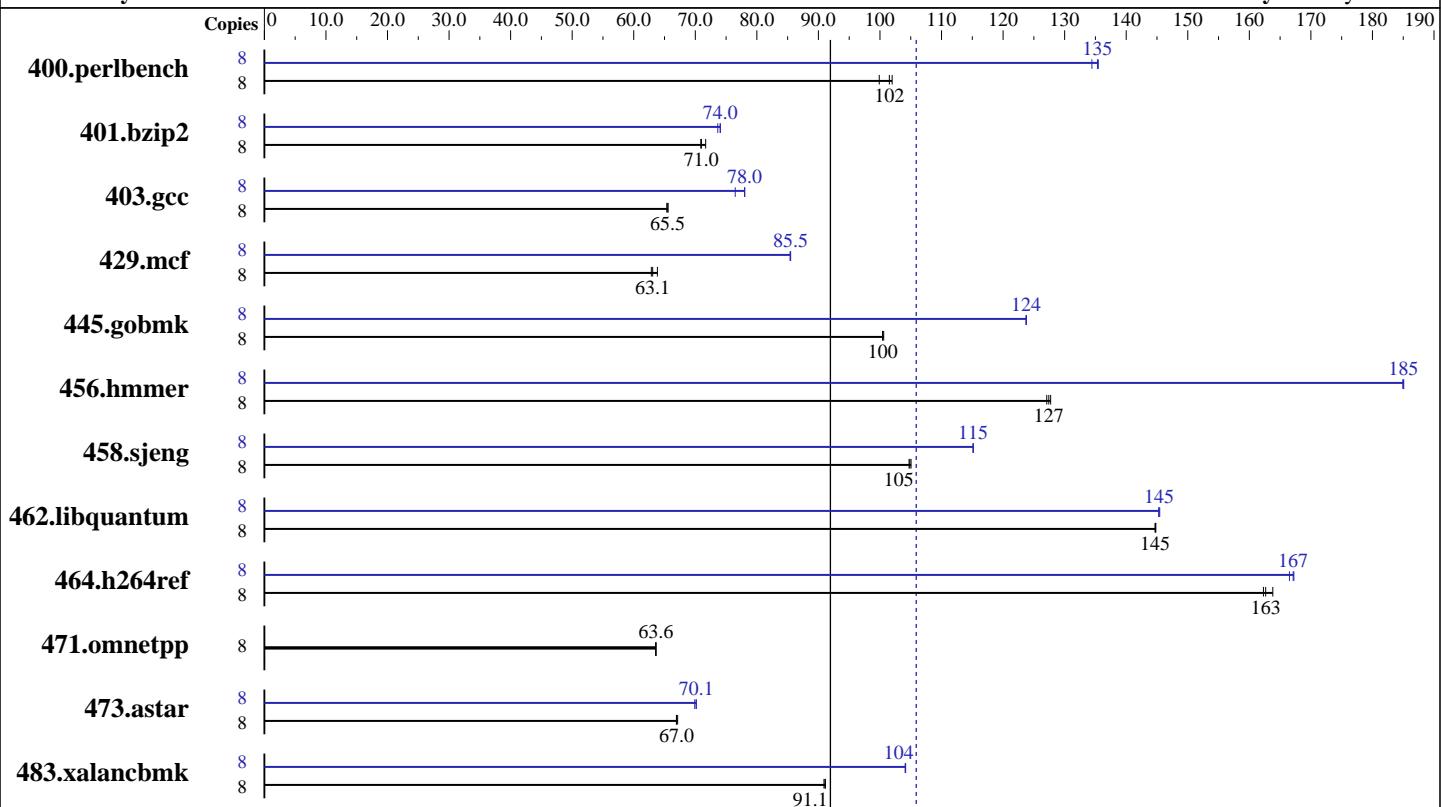

**SPECint\_rate\_base2006 = 91.9**

**SPECint\_rate2006 = 106**

## Hardware

CPU Name:	AMD Opteron 2360 SE
CPU Characteristics:	
CPU MHz:	2500
FPU:	Integrated
CPU(s) enabled:	8 cores, 2 chips, 4 cores/chip
CPU(s) orderable:	2 chips
Primary Cache:	64 KB I + 64 KB D on chip per core
Secondary Cache:	512 KB I+D on chip per core
L3 Cache:	2 MB I+D on chip per chip
Other Cache:	None
Memory:	16 GB (8 x 2 GB, DDR2-667, CL5)
Disk Subsystem:	1 x 36 GB SAS 15000 RPM
Other Hardware:	None

## Software

Operating System:	SUSE Linux Enterprise Server 10 (x86_64) SP2, Kernel 2.6.16-60.0.21-smp
Compiler:	PGI Server Complete Version 7.2
Auto Parallel:	PathScale Compiler Suite Version 3.1
File System:	No
System State:	ReiserFS
Base Pointers:	Run level 3 (multi-user)
Peak Pointers:	32/64-bit
Other Software:	32/64-bit
	SmartHeap 8.0 32-bit Library for Linux



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

**SPECint\_rate2006 = 106**

PowerEdge M805 (AMD Opteron 2360 SE, 2.5 GHz)

**SPECint\_rate\_base2006 = 91.9**

CPU2006 license: 55

Test date: Aug-2008

Test sponsor: Dell Inc.

Hardware Availability: Aug-2008

Tested by: Dell Inc.

Software Availability: May-2008

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	8	766	102	<b>770</b>	<b>102</b>	782	99.9	8	581	134	577	135	<b>578</b>	<b>135</b>
401.bzip2	8	1077	71.7	<b>1087</b>	<b>71.0</b>	1089	70.9	8	1048	73.6	<b>1043</b>	<b>74.0</b>	1042	74.1
403.gcc	8	<b>983</b>	<b>65.5</b>	985	65.4	982	65.6	8	842	76.5	<b>826</b>	<b>78.0</b>	825	78.0
429.mcf	8	1143	63.8	1161	62.9	<b>1157</b>	<b>63.1</b>	8	854	85.4	<b>854</b>	<b>85.5</b>	854	85.5
445.gobmk	8	<b>835</b>	<b>100</b>	836	100	834	101	8	<b>678</b>	<b>124</b>	678	124	678	124
456.hammer	8	584	128	<b>586</b>	<b>127</b>	587	127	8	403	185	<b>403</b>	<b>185</b>	404	185
458.sjeng	8	921	105	924	105	<b>923</b>	<b>105</b>	8	841	115	<b>841</b>	<b>115</b>	841	115
462.libquantum	8	<b>1145</b>	<b>145</b>	1146	145	1145	145	8	1140	145	1141	145	<b>1141</b>	<b>145</b>
464.h264ref	8	1081	164	<b>1088</b>	<b>163</b>	1091	162	8	1059	167	<b>1059</b>	<b>167</b>	1063	167
471.omnetpp	8	786	63.6	786	63.6	<b>786</b>	<b>63.6</b>	8	786	63.6	786	63.6	<b>786</b>	<b>63.6</b>
473.astar	8	839	66.9	<b>839</b>	<b>67.0</b>	837	67.1	8	800	70.2	<b>801</b>	<b>70.1</b>	803	69.9
483.xalancbmk	8	607	90.9	606	91.1	<b>606</b>	<b>91.1</b>	8	<b>530</b>	<b>104</b>	530	104	530	104

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

```
'numactl' was used to bind copies to the cores
Environment variable PGI_HUGE_PAGES set to 150
'unlimit -s unlimited' was used to set environment stack size
'unlimit -l 2457600' was used to set environment locked pages in memory quantity
Set vm.nr_hugepages=1200 in /etc/sysctl.conf
mount -t hugetlbfs nodev /mnt/hugepages
```

## Base Compiler Invocation

C benchmarks:  
pgcc

C++ benchmarks:  
pgcpp

## Base Portability Flags

```
400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hammer: -DSPEC_CPU_LP64
```

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge M805 (AMD Opteron 2360 SE, 2.5 GHz)

**SPECint\_rate2006 = 106**

CPU2006 license: 55

Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date: Aug-2008

Hardware Availability: Aug-2008

Software Availability: May-2008

## Base Portability Flags (Continued)

458.sjeng: -DSPEC\_CPU\_LP64  
462.libquantum: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX  
464.h264ref: -DSPEC\_CPU\_LP64  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:

-fast -Mipa=fast -Mipa=inline -Mfprelaxed -Msmartralloc=huge:150  
-tp barcelona-64 -Bstatic\_pgi

C++ benchmarks:

-fastsse -Mipa=fast -Mipa=inline -Mfprelaxed -Msmartralloc=huge:150  
--zc\_eh -tp barcelona -Bstatic\_pgi

## Base Other Flags

C benchmarks:

-w -Mipa=jobs:4

C++ benchmarks:

-w -Mipa=jobs:4

## Peak Compiler Invocation

C benchmarks (except as noted below):

pgcc

400.perlbench: pathcc

403.gcc: pathcc

445.gobmk: pathcc

C++ benchmarks (except as noted below):

pathCC

471.omnetpp: pgcpp



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

**SPECint\_rate2006 = 106**

PowerEdge M805 (AMD Opteron 2360 SE, 2.5 GHz)

**SPECint\_rate\_base2006 = 91.9**

**CPU2006 license:** 55

**Test date:** Aug-2008

**Test sponsor:** Dell Inc.

**Hardware Availability:** Aug-2008

**Tested by:** Dell Inc.

**Software Availability:** May-2008

## Peak Portability Flags

```

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
 401.bzip2: -DSPEC_CPU_LP64
 445.gobmk: -DSPEC_CPU_LP64
 456.hmmer: -DSPEC_CPU_LP64
 458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
 464.h264ref: -DSPEC_CPU_LP64
 483.xalancbmk: -DSPEC_CPU_LINUX

```

## Peak Optimization Flags

C benchmarks:

```

400.perlbench: -march=barcelona -fb_create fbdata(pass 1)
  -fb_opt fbdata(pass 2) -Ofast -IPA:plimit=20000 -LNO:opt=0
  -WOPT;if_conv=0 -CG:local_sched_alg=1

401.bzip2: -Mpfi(pass 1) -Mpfo(pass 2) -fast -O4
  -Msmartralloc=huge:150 -Mnounroll -tp barcelona-64
  -Bstatic_pgi

403.gcc: -march=barcelona -fb_create fbdata(pass 1)
  -fb_opt fbdata(pass 2) -m32 -O3 -OPT:Ofast

429.mcf: -fastsse -Mipa=fast -Mipa:inline:1 -Msmartralloc=huge:150
  -tp barcelona -Bstatic_pgi

445.gobmk: -march=barcelona -fb_create fbdata(pass 1)
  -fb_opt fbdata(pass 2) -O3 -OPT:alias=restrict -LNO:opt=0
  -CG:p2align=on

456.hmmer: -fastsse -Munroll=n:8 -Msmartralloc=huge:150 -Mfprelaxed
  -Mvect=partial -Msafepr -Mipa=const -Mipa=ptr -Mipa=arg
  -Mipa:inline -tp barcelona-64 -Bstatic_pgi

458.sjeng: -Mpfi(pass 1) -Mipa=fast(pass 2) -Mipa:inline:1(pass 2)
  -Mipa=noarg(pass 2) -Mpfo(pass 2) -fastsse
  -Msmartralloc=huge:150 -Mfprelaxed -tp barcelona-64
  -Bstatic_pgi

462.libquantum: -fastsse -Mfprelaxed -Msmartralloc=huge:150 -Munroll=m:8
  -Mipa=fast -Mipa:inline -Mipa=noarg -tp barcelona-64
  -Bstatic_pgi

464.h264ref: -Mpfi=indirect(pass 1) -Mipa=fast(pass 2)
  -Mipa=inline(pass 2) -Mpfo=indirect(pass 2) -fastsse
  -Msmartralloc=huge:150 -Mfprelaxed -tp barcelona-64
  -Bstatic_pgi

```

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge M805 (AMD Opteron 2360 SE, 2.5 GHz)

CPU2006 license: 55

Test sponsor: Dell Inc.

Tested by: Dell Inc.

**SPECint\_rate2006 = 106**

**SPECint\_rate\_base2006 = 91.9**

Test date: Aug-2008

Hardware Availability: Aug-2008

Software Availability: May-2008

## Peak Optimization Flags (Continued)

C++ benchmarks:

471.omnetpp: basepeak = yes

473.astar: -march=barcelona -Ofast -TENV:frame\_pointer=off  
-WOPT;if\_conv=0 -GRA:optimize\_boundary=on -IPA:plimit=525  
-m32 -lsmartheap

483.xalancbmk: -march=barcelona -Ofast -m32 -OPT:unroll\_times\_max=8  
-CG:push\_pop\_int\_saved\_regs=off -CG:ptr\_load\_use=0  
-lsmartheap

## Peak Other Flags

C benchmarks (except as noted below):

-w -Mipa=jobs:4(pass 2)

400.perlbench: No flags used

401.bzip2: -w

403.gcc: No flags used

445.gobmk: No flags used

C++ benchmarks (except as noted below):

-L/root/work/cpu2006/amd123GH.libs/32

471.omnetpp: -w -Mipa=jobs:4

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/amd123GH-flags.20090713.01.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/amd123GH-flags.20090713.01.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.0.

Report generated on Tue Jul 22 19:25:57 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 19 August 2008.