



SPEC[®] CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

SPECfp[®]2006 = 22.3

PRIMERGY RX300 S4, Intel Xeon E5440, 2.83 GHz

SPECfp_base2006 = 18.9

CPU2006 license: 22


Test sponsor: Fujitsu Siemens Computers

Tested by: Fujitsu Siemens Computers

Test date: Jun-2008

Hardware Availability: Dec-2007

Software Availability: Nov-2007

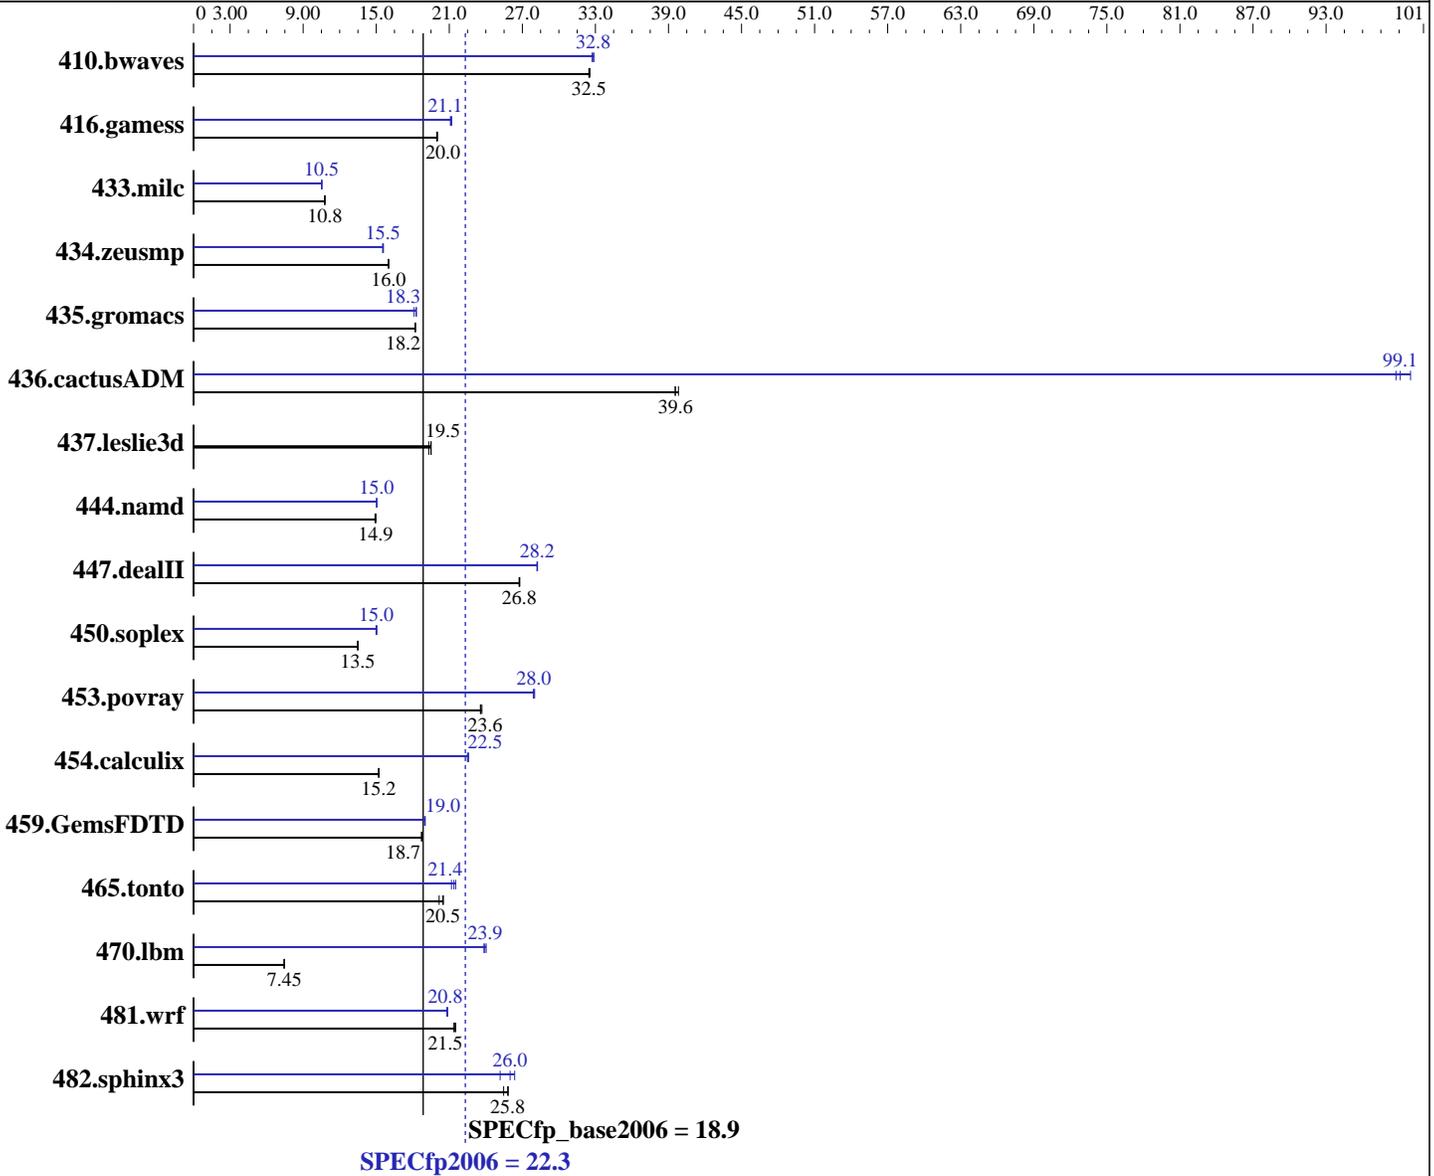

Hardware

CPU Name: Intel Xeon E5440
 CPU Characteristics: 1333 MHz system bus
 CPU MHz: 2833
 FPU: Integrated
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 12 MB I+D on chip per chip, 6 MB shared / 2 cores

Continued on next page

Software

Operating System: SUSE Linux Enterprise Server 10 (x86_64) SP1, Kernel 2.6.16.46-0.12-smp
 Compiler: Intel C++ and Fortran Compiler for Linux32 and Linux64, version 10.1, Build 20070913
 Auto Parallel: Yes
 File System: ext2
 System State: Multi-User Run Level 3
 Base Pointers: 64-bit
 Peak Pointers: 32/64-bit

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

SPECfp2006 = **22.3**

PRIMERGY RX300 S4, Intel Xeon E5440, 2.83 GHz

SPECfp_base2006 = **18.9**

CPU2006 license: 22

Test date: Jun-2008

Test sponsor: Fujitsu Siemens Computers

Hardware Availability: Dec-2007

Tested by: Fujitsu Siemens Computers

Software Availability: Nov-2007

L3 Cache: None
Other Cache: None
Memory: 16 GB (8x2 GB PC2-5300F, 2 rank, CL 5-5-5, ECC)
Disk Subsystem: 1x SAS, 73 GB, 15000 rpm
Other Hardware: None

Other Software: binutils-2.17.50.0.5-0.1.x86_64

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	417	32.6	419	32.5	419	32.5	415	32.7	413	32.9	414	32.8
416.gamess	980	20.0	979	20.0	977	20.0	927	21.1	924	21.2	928	21.1
433.milc	850	10.8	853	10.8	852	10.8	870	10.5	873	10.5	872	10.5
434.zeusmp	568	16.0	569	16.0	568	16.0	584	15.6	585	15.5	585	15.5
435.gromacs	392	18.2	392	18.2	392	18.2	390	18.3	391	18.3	394	18.1
436.cactusADM	300	39.8	302	39.6	302	39.5	121	99.1	120	99.9	121	98.7
437.leslie3d	482	19.5	482	19.5	487	19.3	482	19.5	482	19.5	487	19.3
444.namd	538	14.9	536	15.0	537	14.9	533	15.0	533	15.0	533	15.0
447.dealII	427	26.8	427	26.8	428	26.7	405	28.2	405	28.2	406	28.2
450.soplex	618	13.5	618	13.5	619	13.5	554	15.1	556	15.0	557	15.0
453.povray	226	23.6	225	23.7	226	23.6	191	27.9	190	28.0	190	28.0
454.calculix	542	15.2	543	15.2	542	15.2	365	22.6	367	22.5	366	22.5
459.GemsFDTD	566	18.8	566	18.7	567	18.7	558	19.0	558	19.0	560	19.0
465.tonto	480	20.5	481	20.5	488	20.2	457	21.5	465	21.2	460	21.4
470.lbm	1844	7.45	1849	7.43	1844	7.45	572	24.0	574	23.9	576	23.8
481.wrf	519	21.5	520	21.5	522	21.4	537	20.8	536	20.9	536	20.8
482.sphinx3	754	25.8	765	25.5	756	25.8	774	25.2	750	26.0	739	26.4

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run
OMP_NUM_THREADS set to number of cores (default)

Platform Notes

Hardware Prefetch = Enable, Adjacent Sector Prefetch = Enable

General Notes

All binaries were built with 64-bit Intel compiler except:
450.soplex, 470.lbm and 482.sphinx3 in peak were built with
32-bit Intel compiler by changing the path
for include and library files.

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

SPECfp2006 = 22.3

PRIMERGY RX300 S4, Intel Xeon E5440, 2.83 GHz

SPECfp_base2006 = 18.9

CPU2006 license: 22

Test sponsor: Fujitsu Siemens Computers

Tested by: Fujitsu Siemens Computers

Test date: Jun-2008

Hardware Availability: Dec-2007

Software Availability: Nov-2007

General Notes (Continued)

For information about Fujitsu Siemens Computers please see:
<http://www.fujitsu-siemens.com>

Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

icc ifort

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
 416.gamess: -DSPEC_CPU_LP64
 433.milc: -DSPEC_CPU_LP64
 434.zeusmp: -DSPEC_CPU_LP64
 435.gromacs: -DSPEC_CPU_LP64 -nofor_main
 436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
 437.leslie3d: -DSPEC_CPU_LP64
 444.namd: -DSPEC_CPU_LP64
 447.dealII: -DSPEC_CPU_LP64
 450.soplex: -DSPEC_CPU_LP64
 453.povray: -DSPEC_CPU_LP64
 454.calculix: -DSPEC_CPU_LP64 -nofor_main
 459.GemsFDTD: -DSPEC_CPU_LP64
 465.tonto: -DSPEC_CPU_LP64
 470.lbm: -DSPEC_CPU_LP64
 481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
 482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:

-fast -parallel

C++ benchmarks:

-fast -parallel

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

SPECfp2006 = 22.3

PRIMERGY RX300 S4, Intel Xeon E5440, 2.83 GHz

SPECfp_base2006 = 18.9

CPU2006 license: 22

Test date: Jun-2008

Test sponsor: Fujitsu Siemens Computers

Hardware Availability: Dec-2007

Tested by: Fujitsu Siemens Computers

Software Availability: Nov-2007

Base Optimization Flags (Continued)

Fortran benchmarks:

-fast -parallel

Benchmarks using both Fortran and C:

-fast -parallel

Peak Compiler Invocation

C benchmarks (except as noted below):

/opt/intel/cc/10.1.008/bin/icc -L/opt/intel/cc/10.1.008/lib
-I/opt/intel/cc/10.1.008/include

433.milc: icc

C++ benchmarks (except as noted below):

icpc

450.soplex: /opt/intel/cc/10.1.008/bin/icpc -L/opt/intel/cc/10.1.008/lib
-I/opt/intel/cc/10.1.008/include

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

icc ifort

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

SPECfp2006 = 22.3

PRIMERGY RX300 S4, Intel Xeon E5440, 2.83 GHz

SPECfp_base2006 = 18.9

CPU2006 license: 22

Test sponsor: Fujitsu Siemens Computers

Tested by: Fujitsu Siemens Computers

Test date: Jun-2008

Hardware Availability: Dec-2007

Software Availability: Nov-2007

Peak Optimization Flags

C benchmarks:

433.milc: -prof-gen(pass 1) -prof-use(pass 2) -fast -fno-alias
-auto-ilp32

470.lbm: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2
-scalar-rep- -prefetch -opt-malloc-options=3

482.sphinx3: -fast -unroll2

C++ benchmarks:

444.namd: -prof-gen(pass 1) -prof-use(pass 2) -fast -fno-alias
-auto-ilp32

447.dealII: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2
-ansi-alias -scalar-rep-

450.soplex: -prof-gen(pass 1) -prof-use(pass 2) -fast
-opt-malloc-options=3

453.povray: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll4
-ansi-alias

Fortran benchmarks:

410.bwaves: -fast -prefetch -parallel

416.gamess: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2 -Ob0
-ansi-alias -scalar-rep-

434.zeusmp: -prof-gen(pass 1) -prof-use(pass 2) -fast

437.leslie3d: basepeak = yes

459.GemsFDTD: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2 -Ob0
-prefetch -parallel

465.tonto: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll4 -auto

Benchmarks using both Fortran and C:

435.gromacs: -prof-gen(pass 1) -prof-use(pass 2) -fast -prefetch
-auto-ilp32

436.cactusADM: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2
-prefetch -parallel -auto-ilp32

454.calculix: -fast -unroll-aggressive -auto-ilp32

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

SPECfp2006 = 22.3

PRIMERGY RX300 S4, Intel Xeon E5440, 2.83 GHz

SPECfp_base2006 = 18.9

CPU2006 license: 22

Test sponsor: Fujitsu Siemens Computers

Tested by: Fujitsu Siemens Computers

Test date: Jun-2008

Hardware Availability: Dec-2007

Software Availability: Nov-2007

Peak Optimization Flags (Continued)

481.wrf: -fast -parallel -prefetch -auto-ilp32

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/flags-ic101-linux-intel64.20090713.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/flags-ic101-linux-intel64.20090713.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Jul 22 19:16:55 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 2 September 2008.