SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

PRIMERGY TX150 S6, Intel Xeon X3370, 3.0 GHz

SPECint®_rate2006 = 77.6

SPECint_rate_base2006 = 66.2

CPU2006 license: 22
Test sponsor: Fujitsu Siemens Computers
Tested by: Fujitsu Siemens Computers

Test date: Jul-2008
Hardware Availability: Oct-2008
Software Availability: May-2008

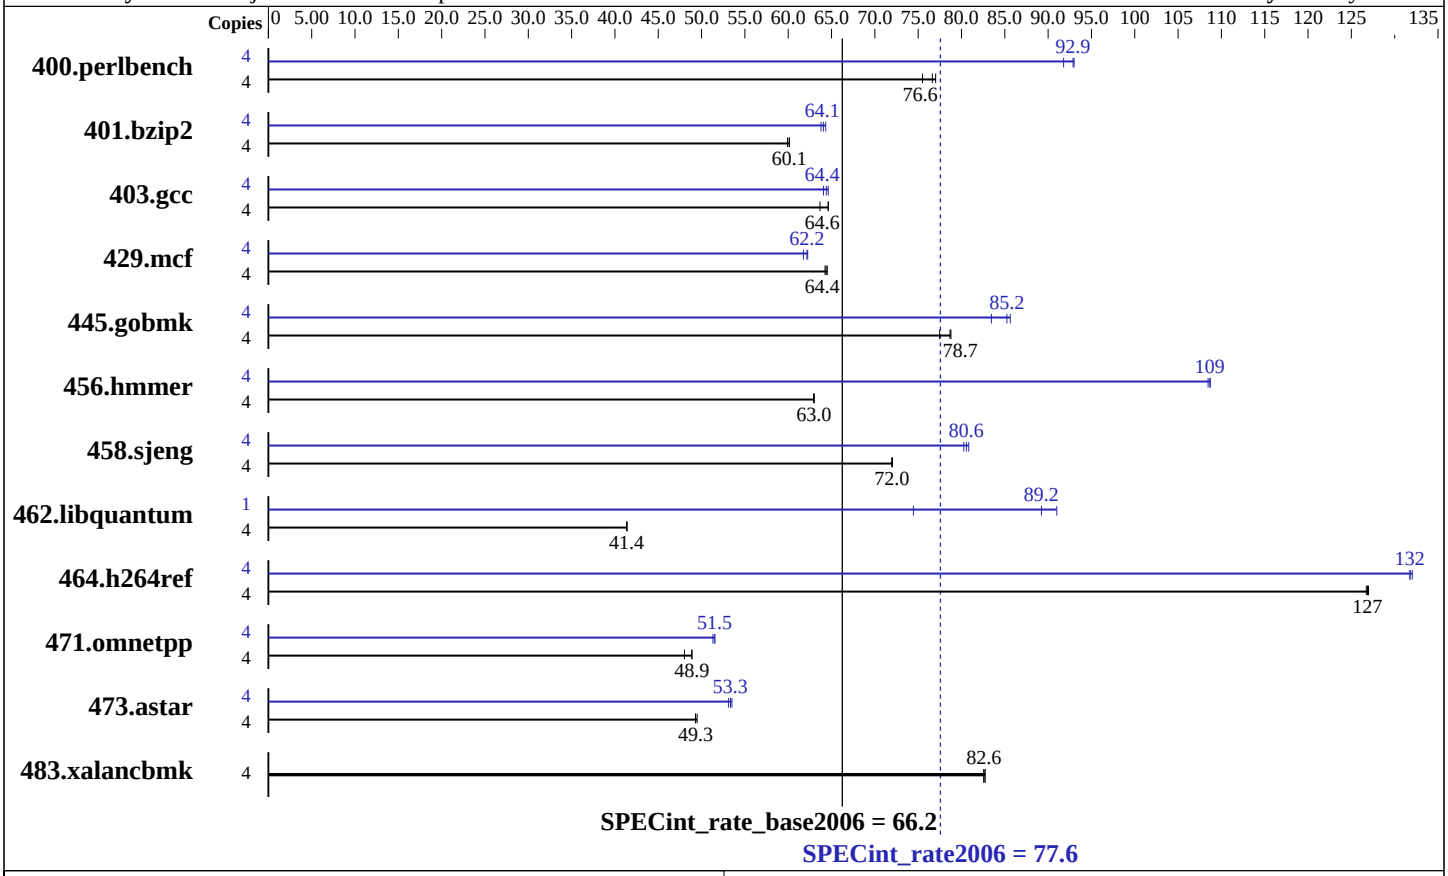

Hardware

CPU Name:	Intel Xeon X3370
CPU Characteristics:	1333 MHz system bus
CPU MHz:	3000
FPU:	Integrated
CPU(s) enabled:	4 cores, 1 chip, 4 cores/chip
CPU(s) orderable:	1 chip
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	12 MB I+D on chip per chip, 6 MB shared / 2 cores
L3 Cache:	None
Other Cache:	None
Memory:	8 GB (4x2 GB PC2-6400E, 2 rank, CL 6-6-6, ECC)
Disk Subsystem:	1x SATA, 80 GB, 7200 rpm
Other Hardware:	None

Software

Operating System:	SuSE Linux Enterprise Server 10 (x86_64) with SP2, kernel 2.6.16.60-0.21-smp
Compiler:	Intel C++ Compiler for Linux32 and Linux64, Version 10.1, Build 20070913
Auto Parallel:	Yes
File System:	ext3
System State:	Multi-User Run Level 3
Base Pointers:	32-bit
Peak Pointers:	32/64-bit
Other Software:	Microquill SmartHeap Library, Version 8.1 binutils-2.17.50.0.5-0.1.x86_64

SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

PRIMERGY TX150 S6, Intel Xeon X3370, 3.0 GHz

SPECint_rate2006 = 77.6

SPECint_rate_base2006 = 66.2

CPU2006 license: 22
Test sponsor: Fujitsu Siemens Computers
Tested by: Fujitsu Siemens Computers

Test date: Jul-2008
Hardware Availability: Oct-2008
Software Availability: May-2008

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	4	507	77.0	**510**	**76.6**	518	75.5	4	**421**	**92.9**	420	93.0	426	91.8
401.bzip2	4	644	59.9	642	60.1	**642**	**60.1**	4	600	64.3	605	63.8	**603**	**64.1**
403.gcc	4	498	64.6	**498**	**64.6**	506	63.7	4	503	64.1	**500**	**64.4**	498	64.6
429.mcf	4	568	64.2	**567**	**64.4**	565	64.5	4	591	61.8	586	62.3	**587**	**62.2**
445.gobmk	4	542	77.5	**533**	**78.7**	533	78.8	4	503	83.5	**492**	**85.2**	490	85.6
456.hmmer	4	593	62.9	592	63.0	**593**	**63.0**	4	344	108	**343**	**109**	343	109
458.sjeng	4	672	72.0	**672**	**72.0**	672	72.0	4	**601**	**80.6**	599	80.8	603	80.3
462.libquantum	4	2004	41.4	2002	41.4	**2004**	**41.4**	1	**232**	**89.2**	228	91.0	278	74.4
464.h264ref	4	**698**	**127**	699	127	697	127	4	670	132	**672**	**132**	672	132
471.omnetpp	4	521	48.0	511	48.9	**511**	**48.9**	4	485	51.5	487	51.3	**485**	**51.5**
473.astar	4	570	49.3	567	49.5	**569**	**49.3**	4	**526**	**53.3**	525	53.5	529	53.1
483.xalancbmk	4	334	82.7	334	82.6	**334**	**82.6**	4	334	82.7	334	82.6	**334**	**82.6**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Invocation Notes

All binaries were built with 32-bit Intel compiler except:
401.bzip2 and 456.hmmer in peak were built with 64-bit Intel compiler.

Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run
OMP_NUM_THREADS set to number of cores (default)

Platform Notes

BIOS configuration:
Hardware Prefetch = Disable, Adjacent Sector Prefetch = Disable

General Notes

For information about Fujitsu Siemens Computers please see:
http://www.fujitsu-siemens.com

Base Compiler Invocation

C benchmarks:
/opt/intel/cc/10.1.008/bin/icc -L/opt/intel/cc/10.1.008/lib
-I/opt/intel/cc/10.1.008/include

Continued on next page

Base Compiler Invocation (Continued)

C++ benchmarks:
/opt/intel/cc/10.1.008/bin/icpc -L/opt/intel/cc/10.1.008/lib
-I/opt/intel/cc/10.1.008/include

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
-fast -inline-calloc -opt-malloc-options=3

C++ benchmarks:
-xT -ipo -O3 -no-prec-div -Wl,-z,muldefs
-L/opt/SmartHeap_8.1/lib -lsmartheap

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):
/opt/intel/cc/10.1.008/bin/icc -L/opt/intel/cc/10.1.008/lib
-I/opt/intel/cc/10.1.008/include

401.bzip2: icc

456.hmmer: icc

C++ benchmarks:
/opt/intel/cc/10.1.008/bin/icpc -L/opt/intel/cc/10.1.008/lib
-I/opt/intel/cc/10.1.008/include

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
401.bzip2: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -prof-gen(pass 1) -prof-use(pass 2) -fast -ansi-alias -prefetch

401.bzip2: -prof-gen(pass 1) -prof-use(pass 2) -fast -prefetch

403.gcc: -fast -inline-calloc -opt-malloc-options=3

429.mcf: -fast -prefetch

445.gobmk: -prof-gen(pass 1) -prof-use(pass 2) -xT -O2 -ipo -no-prec-div -ansi-alias

456.hmmer: -fast -unroll2 -ansi-alias -opt-multi-version-aggressive

458.sjeng: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll4

462.libquantum: -fast -unroll4 -Ob0 -prefetch -opt-streaming-stores always -vec-guard-write -opt-malloc-options=3 -parallel -par-runtime-control

464.h264ref: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -prof-gen(pass 1) -prof-use(pass 2) -xT -O3 -ipo -no-prec-div -ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs -L/opt/SmartHeap_8.1/lib -lsmartheap

473.astar: -prof-gen(pass 1) -prof-use(pass 2) -xT -O3 -ipo -no-prec-div -ansi-alias -opt-ra-region-strategy=routine -Wl,-z,muldefs -L/opt/SmartHeap_8.1/lib -lsmartheap

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

The flags file that was used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/flags-ic101-linux-intel64.html`

You can also download the XML flags source by saving the following link:
`http://www.spec.org/cpu2006/flags/flags-ic101-linux-intel64.xml`

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Tue Jul 22 19:10:12 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 2 September 2008.