



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

### SPECfp®\_rate2006 = 103

ProLiant DL580 G5  
(2.40 GHz, Intel Xeon E7330)

### SPECfp\_rate\_base2006 = 96.2

CPU2006 license: 3


Test date: Jun-2008

Test sponsor: Hewlett-Packard Company

Hardware Availability: Jan-2008

Tested by: Hewlett-Packard Company

Software Availability: Jun-2008

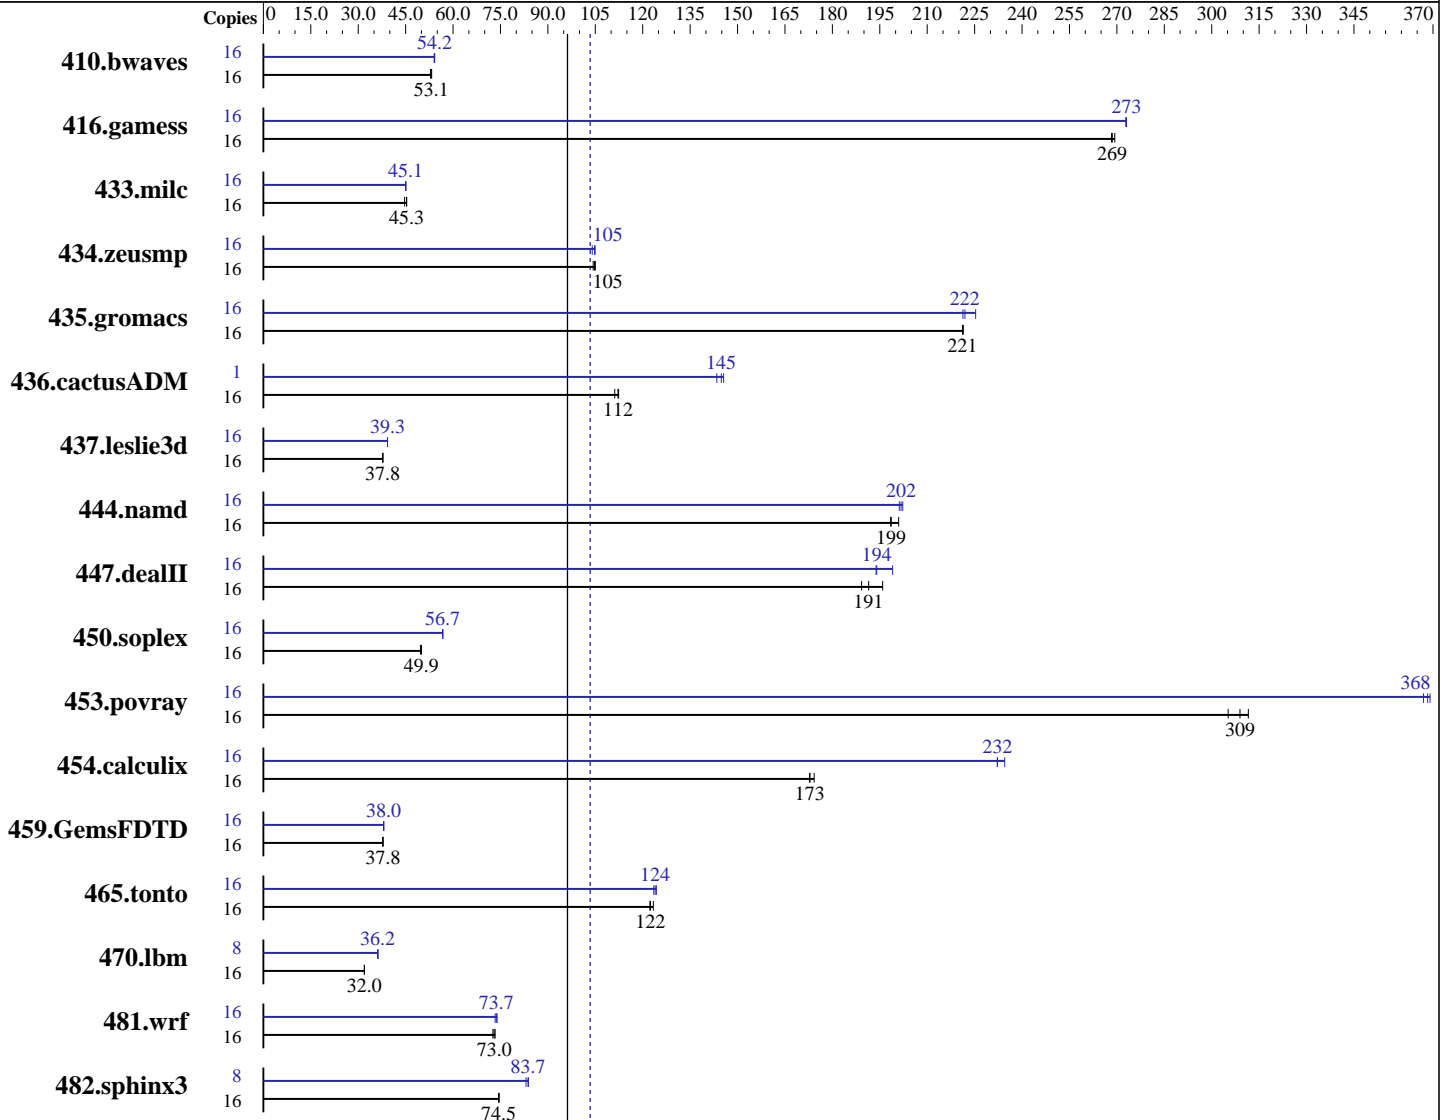

SPECfp\_rate\_base2006 = 96.2

SPECfp\_rate2006 = 103

### Hardware

CPU Name: Intel Xeon E7330  
 CPU Characteristics: 2.40 GHz, 2x3 MB L2 shared, 1066 MHz system bus  
 CPU MHz: 2400  
 FPU: Integrated  
 CPU(s) enabled: 16 cores, 4 chips, 4 cores/chip  
 CPU(s) orderable: 2,4 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 6 MB I+D on chip per chip, 3 MB shared / 2 cores

Continued on next page

### Software

Operating System: SUSE Linux Enterprise Server 10 (x86\_64) SP1, Kernel 2.6.16.46-0.12-smp  
 Compiler: Intel C++ Compiler 10.1 for Linux Build 20070913 Package ID: l\_cc\_p\_10.1.008  
 Intel Fortran Compiler 10.1 for Linux Build 20070913 Package ID: l\_cc\_p\_10.1.008  
 Auto Parallel: Yes  
 File System: ext2  
 System State: Run level 3 (multi-user)

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

SPECfp\_rate2006 = 103

ProLiant DL580 G5  
(2.40 GHz, Intel Xeon E7330)

SPECfp\_rate\_base2006 = 96.2

CPU2006 license: 3  
Test sponsor: Hewlett-Packard Company  
Tested by: Hewlett-Packard Company

Test date: Jun-2008  
Hardware Availability: Jan-2008  
Software Availability: Jun-2008

L3 Cache: None  
Other Cache: None  
Memory: 32 GB (16x2 GB PC2-5300F CL5)  
Disk Subsystem: 1x72 GB 15 K SAS  
Other Hardware: None

Base Pointers: 64-bit  
Peak Pointers: 32/64-bit  
Other Software: binutils-2.17.50

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	16	4114	52.9	4084	53.2	<b>4095</b>	<b>53.1</b>	16	<b>4015</b>	<b>54.2</b>	4014	54.2	4025	54.0
416.gamess	16	1168	268	<b>1167</b>	<b>269</b>	1163	269	16	<b>1147</b>	<b>273</b>	1148	273	1147	273
433.milc	16	3287	44.7	3240	45.3	<b>3243</b>	<b>45.3</b>	16	3264	45.0	<b>3260</b>	<b>45.1</b>	3259	45.1
434.zeusmp	16	1396	104	<b>1390</b>	<b>105</b>	1386	105	16	1400	104	1388	105	<b>1389</b>	<b>105</b>
435.gromacs	16	<b>517</b>	<b>221</b>	516	221	517	221	16	<b>515</b>	<b>222</b>	507	225	516	221
436.cactusADM	16	1720	111	1702	112	<b>1704</b>	<b>112</b>	1	82.1	146	<b>82.5</b>	<b>145</b>	83.3	143
437.leslie3d	16	<b>3981</b>	<b>37.8</b>	3983	37.8	3979	37.8	16	<b>3830</b>	<b>39.3</b>	3829	39.3	3831	39.3
444.namd	16	639	201	647	198	<b>646</b>	<b>199</b>	16	634	202	<b>636</b>	<b>202</b>	638	201
447.dealII	16	967	189	934	196	<b>956</b>	<b>191</b>	16	920	199	<b>943</b>	<b>194</b>	944	194
450.soplex	16	2685	49.7	<b>2672</b>	<b>49.9</b>	2670	50.0	16	2353	56.7	2351	56.8	<b>2351</b>	<b>56.7</b>
453.povray	16	279	305	<b>276</b>	<b>309</b>	273	312	16	<b>231</b>	<b>368</b>	232	367	231	369
454.calculix	16	758	174	764	173	<b>763</b>	<b>173</b>	16	569	232	<b>568</b>	<b>232</b>	563	235
459.GemsFDTD	16	4481	37.9	<b>4492</b>	<b>37.8</b>	4496	37.8	16	4464	38.0	4456	38.1	<b>4462</b>	<b>38.0</b>
465.tonto	16	1276	123	<b>1286</b>	<b>122</b>	1288	122	16	1275	123	<b>1270</b>	<b>124</b>	1266	124
470.lbm	16	6883	31.9	6877	32.0	<b>6877</b>	<b>32.0</b>	8	3036	36.2	3036	36.2	<b>3036</b>	<b>36.2</b>
481.wrf	16	<b>2448</b>	<b>73.0</b>	2461	72.6	2438	73.3	16	2438	73.3	<b>2425</b>	<b>73.7</b>	2417	73.9
482.sphinx3	16	4192	74.4	4181	74.6	<b>4188</b>	<b>74.5</b>	8	<b>1862</b>	<b>83.7</b>	1860	83.8	1877	83.1

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.  
'/usr/bin/taskset' was used to bind processes to CPUs, except for 436.cactusADM at peak

## Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run  
OMP\_NUM\_THREADS set to number of cores  
KMP\_AFFINITY set to physical,0  
KMP\_STACKSIZE set to 64M



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Hewlett-Packard Company**

**SPECfp\_rate2006 = 103**

ProLiant DL580 G5  
(2.40 GHz, Intel Xeon E7330)

**SPECfp\_rate\_base2006 = 96.2**

**CPU2006 license:** 3

**Test date:** Jun-2008

**Test sponsor:** Hewlett-Packard Company

**Hardware Availability:** Jan-2008

**Tested by:** Hewlett-Packard Company

**Software Availability:** Jun-2008

## Platform Notes

BIOS configuration:

Power Regulator set to Static High Performance Mode  
Adjacent Sector Prefetch Disabled  
Hardware Prefetcher Disabled

## Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

icc ifort

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:

-fast

C++ benchmarks:

-fast

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Hewlett-Packard Company**

**SPECfp\_rate2006 = 103**

ProLiant DL580 G5  
(2.40 GHz, Intel Xeon E7330)

**SPECfp\_rate\_base2006 = 96.2**

**CPU2006 license:** 3

**Test date:** Jun-2008

**Test sponsor:** Hewlett-Packard Company

**Hardware Availability:** Jan-2008

**Tested by:** Hewlett-Packard Company

**Software Availability:** Jun-2008

## Base Optimization Flags (Continued)

Fortran benchmarks:

-fast

Benchmarks using both Fortran and C:

-fast

## Peak Compiler Invocation

C benchmarks (except as noted below):

/opt/intel/cc/10.1.008/bin/icc -L/opt/intel/cc/10.1.008/lib  
-I/opt/intel/cc/10.1.008/include

433.milc: icc

C++ benchmarks (except as noted below):

icpc

450.soplex: /opt/intel/cc/10.1.008/bin/icpc -L/opt/intel/cc/10.1.008/lib  
-I/opt/intel/cc/10.1.008/include

Fortran benchmarks (except as noted below):

ifort

437.leslie3d: /opt/intel/fc/10.1.008/bin/ifort -L/opt/intel/fc/10.1.008/lib  
-I/opt/intel/fc/10.1.008/include

Benchmarks using both Fortran and C:

icc ifort

## Peak Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

**SPECfp\_rate2006 = 103**

ProLiant DL580 G5  
(2.40 GHz, Intel Xeon E7330)

**SPECfp\_rate\_base2006 = 96.2**

**CPU2006 license:** 3

**Test date:** Jun-2008

**Test sponsor:** Hewlett-Packard Company

**Hardware Availability:** Jan-2008

**Tested by:** Hewlett-Packard Company

**Software Availability:** Jun-2008

## Peak Optimization Flags

### C benchmarks:

433.milc: -prof-gen(pass 1) -prof-use(pass 2) -fast -fno-alias  
-auto-ilp32

470.lbm: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2  
-scalar-rep- -prefetch -opt-malloc-options=3

482.sphinx3: -fast -unroll2

### C++ benchmarks:

444.namd: -prof-gen(pass 1) -prof-use(pass 2) -fast -fno-alias  
-auto-ilp32

447.dealII: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2  
-ansi-alias -scalar-rep-

450.soplex: -prof-gen(pass 1) -prof-use(pass 2) -fast  
-opt-malloc-options=3

453.povray: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll4  
-ansi-alias

### Fortran benchmarks:

410.bwaves: -fast -prefetch

416.gamess: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2 -Ob0  
-ansi-alias -scalar-rep-

434.zeusmp: -prof-gen(pass 1) -prof-use(pass 2) -fast

437.leslie3d: -prof-gen(pass 1) -prof-use(pass 2) -fast -prefetch  
-opt-malloc-options=3

459.GemsFDTD: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2 -Ob0  
-prefetch

465.tonto: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll4 -auto

### Benchmarks using both Fortran and C:

435.gromacs: -prof-gen(pass 1) -prof-use(pass 2) -fast -prefetch  
-auto-ilp32

436.cactusADM: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2  
-prefetch -parallel -auto-ilp32

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Hewlett-Packard Company**

**SPECfp\_rate2006 = 103**

ProLiant DL580 G5  
(2.40 GHz, Intel Xeon E7330)

**SPECfp\_rate\_base2006 = 96.2**

**CPU2006 license:** 3

**Test date:** Jun-2008

**Test sponsor:** Hewlett-Packard Company

**Hardware Availability:** Jan-2008

**Tested by:** Hewlett-Packard Company

**Software Availability:** Jun-2008

## Peak Optimization Flags (Continued)

454.calculix: -fast -unroll-aggressive -auto-ilp32

481.wrf: -fast -auto-ilp32

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/HP-Intel-ic10.1-linux-fp-flags.20090714.00.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/HP-Intel-ic10.1-linux-fp-flags.20090714.00.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.  
Report generated on Tue Jul 22 19:04:19 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 2 September 2008.