



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Intel Corporation

### SPECfp®\_rate2006 = 95.6

### SuperMicro X7DWA-N (Intel Xeon X5492)

### SPECfp\_rate\_base2006 = 87.2

CPU2006 license: 13


Test sponsor: Intel Corporation

Tested by: Intel Corporation

Test date: Sep-2008

Hardware Availability: Nov-2008

Software Availability: Sep-2008

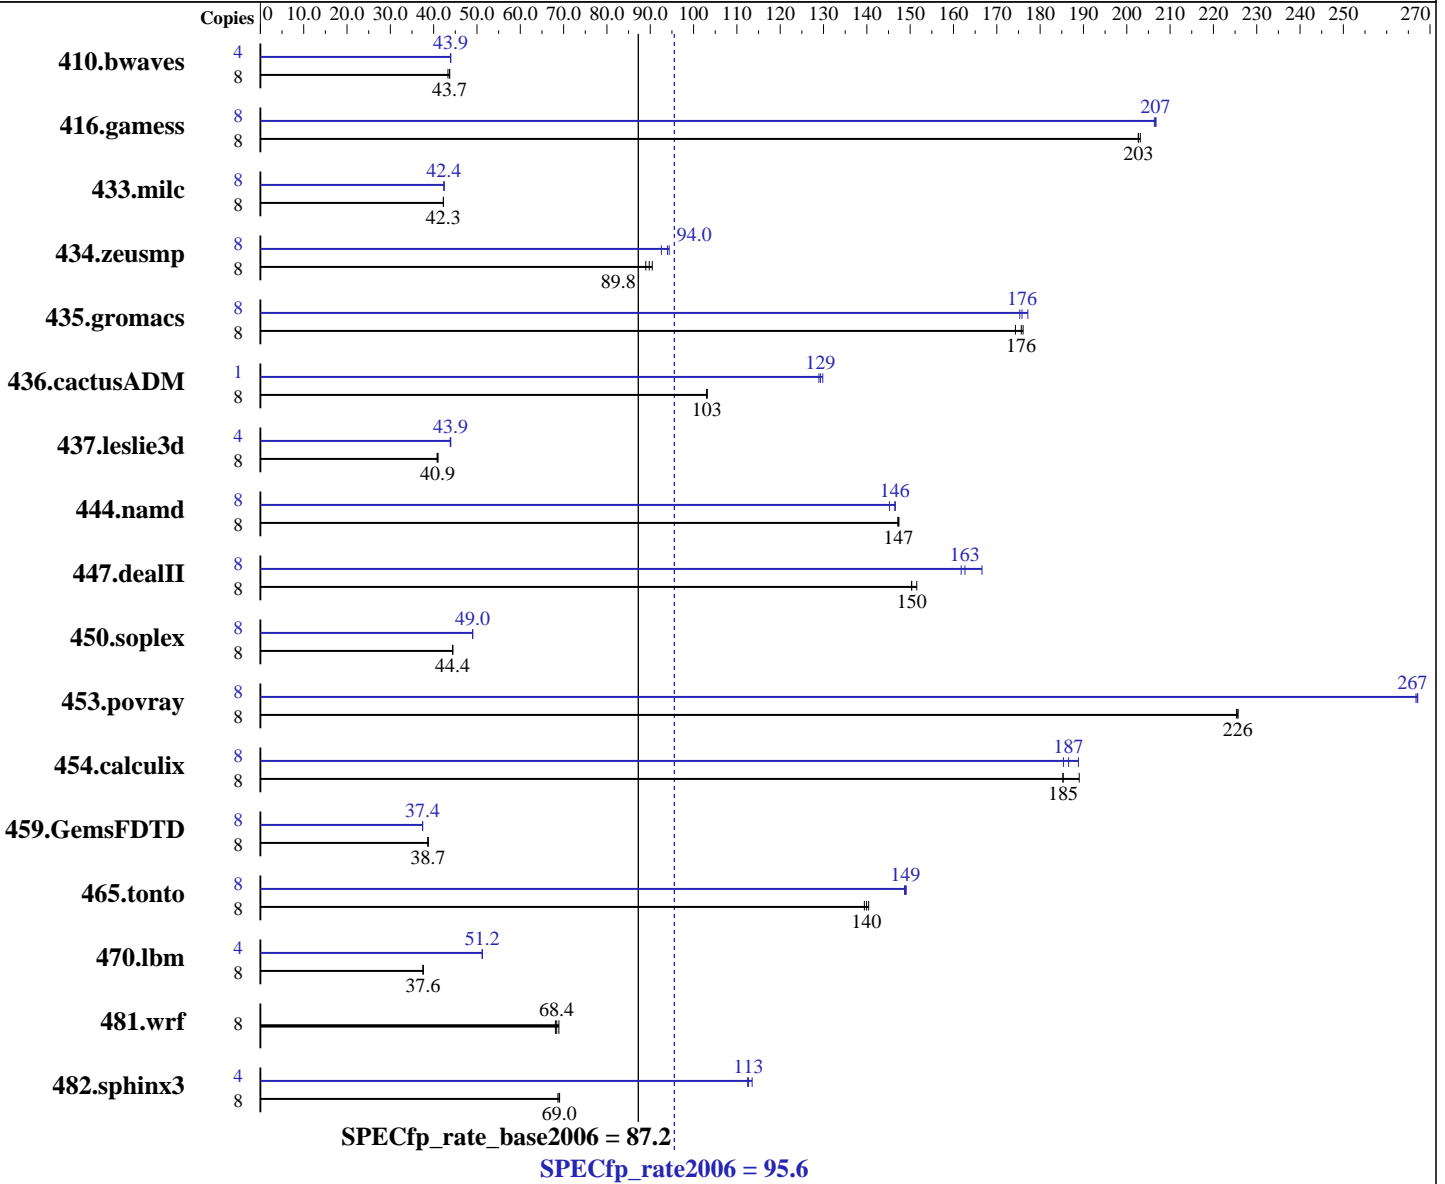

#### Hardware

CPU Name: Intel Xeon X5492  
 CPU Characteristics: 1600MHz system bus  
 CPU MHz: 3400  
 FPU: Integrated  
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip  
 CPU(s) orderable: 1,2 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 12 MB I+D on chip per chip, 6 MB shared / 2 cores

Continued on next page

#### Software

Operating System: SuSe Linux SLES10 SP2  
 Compiler: Intel C++ and Fortran Compiler 11.0 for Linux  
 Build 20080730 Package ID: l\_cproc\_b\_11.0.042,  
 l\_fproc\_b\_11.0.042  
 Auto Parallel: Yes  
 File System: ReiserFS  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECfp\_rate2006 = 95.6

SuperMicro X7DWA-N (Intel Xeon X5492)

SPECfp\_rate\_base2006 = 87.2

CPU2006 license: 13

Test date: Sep-2008

Test sponsor: Intel Corporation

Hardware Availability: Nov-2008

Tested by: Intel Corporation

Software Availability: Sep-2008

L3 Cache: None  
Other Cache: None  
Memory: 16 GB(8 x 2 GB hynix DDR2-6400F CL5-5-5 ECC)  
Disk Subsystem: 1 x 164 GB SATA, 7200RPM  
Other Hardware: None

Other Software: Microquill SmartHeap V8.1  
Binutils 2.18.50.0.7.20080502

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	8	2511	43.3	<u>2489</u>	<u>43.7</u>	2488	43.7	4	<u>1238</u>	<u>43.9</u>	1237	43.9	1238	43.9
416.gamess	8	771	203	<u>773</u>	<u>203</u>	773	203	8	<u>758</u>	<u>207</u>	759	206	758	207
433.milc	8	<u>1738</u>	<u>42.3</u>	1738	42.3	1738	42.3	8	1732	42.4	<u>1732</u>	<u>42.4</u>	1733	42.4
434.zeusmp	8	805	90.5	<u>811</u>	<u>89.8</u>	818	89.0	8	771	94.4	786	92.6	<u>775</u>	<u>94.0</u>
435.gromacs	8	<u>325</u>	<u>176</u>	328	174	324	176	8	326	175	<u>325</u>	<u>176</u>	322	177
436.cactusADM	8	<u>927</u>	<u>103</u>	928	103	927	103	1	<u>92.4</u>	<u>129</u>	92.0	130	92.7	129
437.leslie3d	8	1834	41.0	<u>1838</u>	<u>40.9</u>	1843	40.8	4	858	43.8	<u>856</u>	<u>43.9</u>	856	43.9
444.namd	8	436	147	435	147	<u>436</u>	<u>147</u>	8	438	147	442	145	<u>438</u>	<u>146</u>
447.dealII	8	604	152	<u>609</u>	<u>150</u>	609	150	8	<u>563</u>	<u>163</u>	549	167	566	162
450.soplex	8	1501	44.4	1504	44.4	<u>1504</u>	<u>44.4</u>	8	<u>1362</u>	<u>49.0</u>	1361	49.0	1363	49.0
453.povray	8	<u>189</u>	<u>226</u>	189	225	189	226	8	<u>159</u>	<u>267</u>	159	267	160	267
454.calculix	8	<u>356</u>	<u>185</u>	356	185	349	189	8	356	185	<u>354</u>	<u>187</u>	349	189
459.GemsFDTD	8	2195	38.7	2191	38.7	<u>2193</u>	<u>38.7</u>	8	2267	37.4	2268	37.4	<u>2267</u>	<u>37.4</u>
465.tonto	8	561	140	<u>563</u>	<u>140</u>	565	139	8	529	149	<u>529</u>	<u>149</u>	528	149
470.lbm	8	2927	37.6	<u>2926</u>	<u>37.6</u>	2924	37.6	4	1073	51.2	<u>1073</u>	<u>51.2</u>	1073	51.2
481.wrf	8	1297	68.9	<u>1306</u>	<u>68.4</u>	1312	68.1	8	1297	68.9	<u>1306</u>	<u>68.4</u>	1312	68.1
482.sphinx3	8	2270	68.7	<u>2261</u>	<u>69.0</u>	2257	69.1	4	693	112	<u>692</u>	<u>113</u>	687	114

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.

## General Notes

All benchmarks compiled in 64-bit mode except 437.leslie3d, 450.soplex and 482.sphinx3, at peak, are compiled in 32-bit mode  
taskset was used to bind processes to cores except for 436.cactusADM peak  
OMP\_NUM\_THREADS set to number of processors  
KMP\_AFFINITY set to "physical,0"  
KMP\_STACKSIZE set to 64M



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECfp\_rate2006 = 95.6

SuperMicro X7DWA-N (Intel Xeon X5492)

SPECfp\_rate\_base2006 = 87.2

CPU2006 license: 13

Test sponsor: Intel Corporation

Tested by: Intel Corporation

Test date: Sep-2008

Hardware Availability: Nov-2008

Software Availability: Sep-2008

## Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

icc ifort

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:

-xSSE4.1 -ipo -O3 -no-prec-div -static -opt-prefetch

C++ benchmarks:

-xSSE4.1 -ipo -O3 -no-prec-div -static -opt-prefetch

Fortran benchmarks:

-xSSE4.1 -ipo -O3 -no-prec-div -static -opt-prefetch

Benchmarks using both Fortran and C:

-xSSE4.1 -ipo -O3 -no-prec-div -static -opt-prefetch



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECfp\_rate2006 = 95.6

SuperMicro X7DWA-N (Intel Xeon X5492)

SPECfp\_rate\_base2006 = 87.2

CPU2006 license: 13

Test date: Sep-2008

Test sponsor: Intel Corporation

Hardware Availability: Nov-2008

Tested by: Intel Corporation

Software Availability: Sep-2008

## Peak Compiler Invocation

C benchmarks (except as noted below):

icc

```
482.sphinx3: /opt/intel/Compiler/11.0/042/bin/ia32/icc
             -L/opt/intel/Compiler/11.0/042/ipp/ia32/lib
             -I/opt/intel/Compiler/11.0/042/ipp/ia32/include
```

C++ benchmarks (except as noted below):

icpc

```
450.soplex: /opt/intel/Compiler/11.0/042/bin/ia32/icpc
            -L/opt/intel/Compiler/11.0/042/ipp/ia32/lib
            -I/opt/intel/Compiler/11.0/042/ipp/ia32/include
```

Fortran benchmarks (except as noted below):

ifort

```
437.leslie3d: /opt/intel/Compiler/11.0/042/bin/ia32/ifort
              -L/opt/intel/Compiler/11.0/042/ipp/ia32/lib
              -I/opt/intel/Compiler/11.0/042/ipp/ia32/include
```

Benchmarks using both Fortran and C:

icc ifort

## Peak Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
444.namd: -DSPEC_CPU_LP64
447.deallI: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
```

## Peak Optimization Flags

C benchmarks:

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECfp\_rate2006 = 95.6

SuperMicro X7DWA-N (Intel Xeon X5492)

SPECfp\_rate\_base2006 = 87.2

CPU2006 license: 13

Test date: Sep-2008

Test sponsor: Intel Corporation

Hardware Availability: Nov-2008

Tested by: Intel Corporation

Software Availability: Sep-2008

## Peak Optimization Flags (Continued)

433.milc: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3  
-no-prec-div -static -fno-alias

470.lbm: -xSSE4.1 -ipo -O3 -no-prec-div -static -opt-prefetch  
-auto-ilp32

482.sphinx3: -xSSE4.1 -ipo -O3 -no-prec-div -static -unroll2

### C++ benchmarks:

444.namd: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3  
-no-prec-div -static -fno-alias -auto-ilp32

447.dealIII: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3  
-no-prec-div -static -unroll2 -ansi-alias -scalar-rep-

450.soplex: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3  
-no-prec-div -static -opt-malloc-options=3

453.povray: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3  
-no-prec-div -static -unroll4 -ansi-alias

### Fortran benchmarks:

410.bwaves: -xSSE4.1 -ipo -O3 -no-prec-div -static -opt-prefetch

416.gamess: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3  
-no-prec-div -static -unroll2 -Ob0 -ansi-alias  
-scalar-rep-

434.zeusmp: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3  
-no-prec-div -static

437.leslie3d: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3  
-no-prec-div -static -opt-malloc-options=3 -opt-prefetch

459.GemsFDTD: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3  
-no-prec-div -static -unroll2 -Ob0 -opt-prefetch

465.tonto: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3  
-no-prec-div -static -unroll4 -auto

### Benchmarks using both Fortran and C:

435.gromacs: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3  
-no-prec-div -static -opt-prefetch -auto-ilp32

436.cactusADM: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3  
-no-prec-div -static -unroll2 -opt-prefetch -parallel  
-auto-ilp32

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECfp\_rate2006 = 95.6

SuperMicro X7DWA-N (Intel Xeon X5492)

SPECfp\_rate\_base2006 = 87.2

CPU2006 license: 13

Test sponsor: Intel Corporation

Tested by: Intel Corporation

Test date: Sep-2008

Hardware Availability: Nov-2008

Software Availability: Sep-2008

## Peak Optimization Flags (Continued)

454.calculix: -xSSE4.1 -ipo -O3 -no-prec-div -static -auto-ilp32

481.wrf: basepeak = yes

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-fp-linux64-revA.20090713.09.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-fp-linux64-revA.20090713.09.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.  
Report generated on Tue Jul 22 21:04:15 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 1 October 2008.