SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge 2950 III (Intel Xeon X5470, 3.33 GHz)

SPECfp®_rate2006 = 81.6

SPECfp_rate_base2006 = 74.5

CPU2006 license: 55
Test sponsor: Dell Inc.
Tested by: Dell Inc.

Test date: Sep-2008
Hardware Availability: Sep-2008
Software Availability: Nov-2008

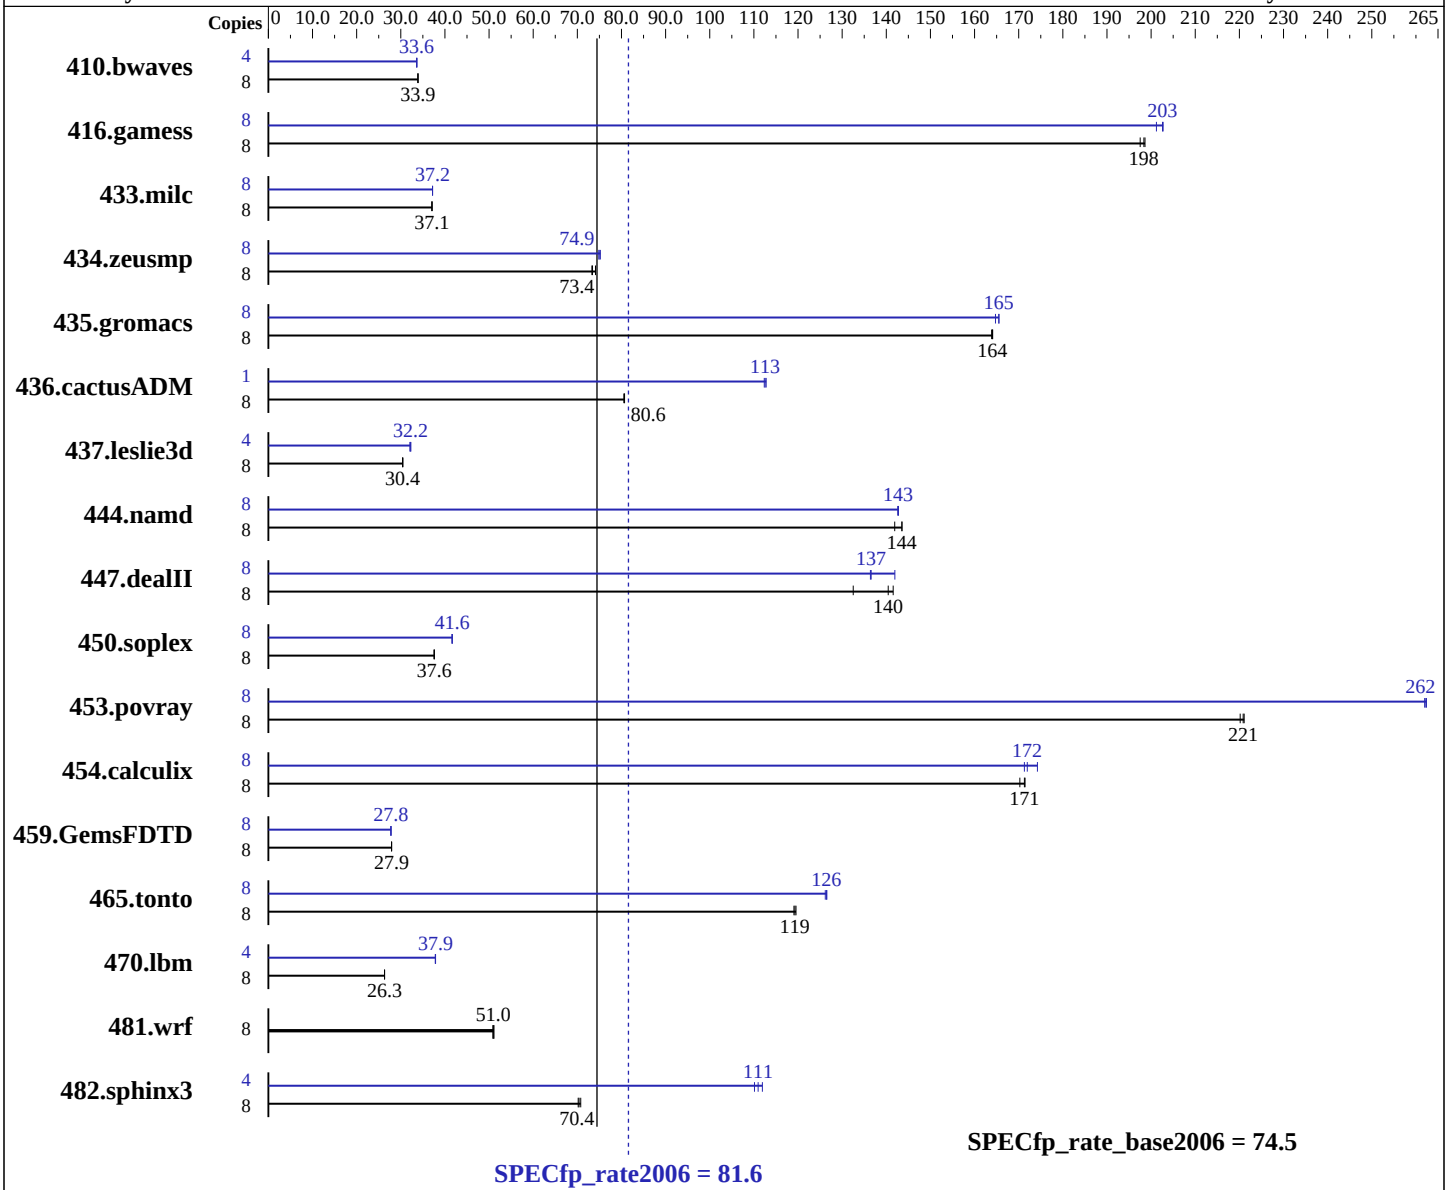

Hardware

CPU Name:	Intel Xeon X5470
CPU Characteristics:	
CPU MHz:	3333
FPU:	Integrated
CPU(s) enabled:	8 cores, 2 chips, 4 cores/chip
CPU(s) orderable:	1,2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	12 MB I+D on chip per chip, 6 MB shared / 2 cores

Continued on next page

Software

Operating System:	SUSE Linux Enterprise Server 10 (x86_64) SP2, Kernel 2.6.16-60.0.21-smp
Compiler:	Intel C++ and Fortran Compiler 11.0 for Linux Build 20080730 Package ID: l_cc_b_11.0.042, l_fc_b_11.0.042
Auto Parallel:	Yes
File System:	ReiserFS
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge 2950 III (Intel Xeon X5470, 3.33 GHz)

SPECfp_rate2006 = 81.6

SPECfp_rate_base2006 = 74.5

CPU2006 license: 55
Test sponsor: Dell Inc.
Tested by: Dell Inc.

Test date: Sep-2008
Hardware Availability: Sep-2008
Software Availability: Nov-2008

L3 Cache: None
Other Cache: None
Memory: 16 GB (4x4GB 667 MHz ECC CL5 FB-DIMM)
Disk Subsystem: 1 x 73 GB 15000 RPM SAS, 1 x 73 GB 10000 RPM SAS
Other Hardware: None

Peak Pointers: 32/64-bit
Other Software: Binutils 2.18.50.0.7.20080502

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	8	**3208**	**33.9**	3208	33.9	3208	33.9	4	1619	33.6	**1616**	**33.6**	1616	33.6
416.gamess	8	793	198	789	199	**790**	**198**	8	773	203	**773**	**203**	779	201
433.milc	8	1982	37.1	**1981**	**37.1**	1981	37.1	8	**1974**	**37.2**	1974	37.2	1975	37.2
434.zeusmp	8	**991**	**73.4**	982	74.1	993	73.3	8	968	75.2	972	74.9	**972**	**74.9**
435.gromacs	8	**348**	**164**	349	164	348	164	8	345	166	**345**	**165**	347	165
436.cactusADM	8	1186	80.6	**1186**	**80.6**	1185	80.7	1	**106**	**113**	106	112	106	113
437.leslie3d	8	**2471**	**30.4**	2468	30.5	2475	30.4	4	1173	32.1	1166	32.2	**1166**	**32.2**
444.namd	8	447	144	452	142	**447**	**144**	8	**450**	**143**	450	143	449	143
447.dealII	8	691	133	**652**	**140**	647	142	8	**670**	**137**	645	142	671	136
450.soplex	8	1776	37.6	**1776**	**37.6**	1775	37.6	8	1602	41.6	1602	41.6	**1602**	**41.6**
453.povray	8	193	220	**193**	**221**	193	221	8	162	262	162	262	**162**	**262**
454.calculix	8	**385**	**171**	385	171	388	170	8	**384**	**172**	385	171	379	174
459.GemsFDTD	8	3041	27.9	**3041**	**27.9**	3041	27.9	8	3059	27.7	**3056**	**27.8**	3055	27.8
465.tonto	8	661	119	659	120	**660**	**119**	8	622	127	624	126	**623**	**126**
470.lbm	8	**4177**	**26.3**	4177	26.3	4175	26.3	4	**1451**	**37.9**	1451	37.9	1454	37.8
481.wrf	8	1757	50.9	**1753**	**51.0**	1748	51.1	8	1757	50.9	**1753**	**51.0**	1748	51.1
482.sphinx3	8	**2215**	**70.4**	2203	70.8	2221	70.2	4	708	110	**703**	**111**	697	112

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The config file option 'submit' was used.
```

Operating System Notes

```
'ulimit -s unlimited' was used to set the stack size to unlimited prior to run
```

Platform Notes

```
BIOS Settings:
Hardware Prefetcher = Disabled (Default = Enabled)
Adjacent Cache Line Prefetch = Disabled (Default = Enabled)
```

General Notes

```
All benchmarks compiled in 64-bit mode except 437.leslie3d, 450.soplex
and 482.sphinx3, at peak, are compiled in 32-bit mode
taskset was used to bind processes to cores except
for 436.cactusADM peak
OMP_NUM_THREADS set to number of processors
KMP_AFFINITY set to "physical,0"
KMP_STACKSIZE set to 64M
```

Base Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc

Fortran benchmarks:
ifort

Benchmarks using both Fortran and C:
icc ifort

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
-xSSE4.1 -ipo -O3 -no-prec-div -static -opt-prefetch

Continued on next page

Base Optimization Flags (Continued)

C++ benchmarks:
`-xSSE4.1 -ipo -O3 -no-prec-div -static -opt-prefetch`

Fortran benchmarks:
`-xSSE4.1 -ipo -O3 -no-prec-div -static -opt-prefetch`

Benchmarks using both Fortran and C:
`-xSSE4.1 -ipo -O3 -no-prec-div -static -opt-prefetch`

Peak Compiler Invocation

C benchmarks (except as noted below):
`icc`

482.sphinx3: `/opt/intel/Compiler/11.0/042/bin/ia32/icc -L/opt/intel/Compiler/11.0/042/ipp/ia32/lib -I/opt/intel/Compiler/11.0/042/ipp/ia32/include`

C++ benchmarks (except as noted below):
`icpc`

450.soplex: `/opt/intel/Compiler/11.0/042/bin/ia32/icpc -L/opt/intel/Compiler/11.0/042/ipp/ia32/lib -I/opt/intel/Compiler/11.0/042/ipp/ia32/include`

Fortran benchmarks (except as noted below):
`ifort`

437.leslie3d: `/opt/intel/Compiler/11.0/042/bin/ia32/ifort -L/opt/intel/Compiler/11.0/042/ipp/ia32/lib -I/opt/intel/Compiler/11.0/042/ipp/ia32/include`

Benchmarks using both Fortran and C:
`icc ifort`

Peak Portability Flags

410.bwaves: `-DSPEC_CPU_LP64`
416.gamess: `-DSPEC_CPU_LP64`
433.milc: `-DSPEC_CPU_LP64`
434.zeusmp: `-DSPEC_CPU_LP64`
435.gromacs: `-DSPEC_CPU_LP64 -nofor_main`
436.cactusADM: `-DSPEC_CPU_LP64 -nofor_main`
444.namd: `-DSPEC_CPU_LP64`
447.dealII: `-DSPEC_CPU_LP64`

Continued on next page

Peak Portability Flags (Continued)

453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

433.milc: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3 -no-prec-div -static -fno-alias

470.lbm: -xSSE4.1 -ipo -O3 -no-prec-div -static -opt-prefetch -auto-ilp32

482.sphinx3: -xSSE4.1 -ipo -O3 -no-prec-div -static -unroll2

C++ benchmarks:

444.namd: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3 -no-prec-div -static -fno-alias -auto-ilp32

447.dealII: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3 -no-prec-div -static -unroll2 -ansi-alias -scalar-rep-

450.soplex: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3 -no-prec-div -static -opt-malloc-options=3

453.povray: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3 -no-prec-div -static -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: -xSSE4.1 -ipo -O3 -no-prec-div -static -opt-prefetch

416.gamess: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3 -no-prec-div -static -unroll2 -Ob0 -ansi-alias -scalar-rep-

434.zeusmp: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3 -no-prec-div -static

437.leslie3d: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3 -no-prec-div -static -opt-malloc-options=3 -opt-prefetch

Continued on next page

Peak Optimization Flags (Continued)

459.GemsFDTD: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-xSSE4.1 -ipo -O3 -no-prec-div -static -unroll2 -Ob0 -opt-prefetch`

465.tonto: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-xSSE4.1 -ipo -O3 -no-prec-div -static -unroll4 -auto`

Benchmarks using both Fortran and C:

435.gromacs: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-xSSE4.1 -ipo -O3 -no-prec-div -static -opt-prefetch -auto-ilp32`

436.cactusADM: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-xSSE4.1 -ipo -O3 -no-prec-div -static -unroll2 -opt-prefetch -parallel -auto-ilp32`

454.calculix: `-xSSE4.1 -ipo -O3 -no-prec-div -static -auto-ilp32`

481.wrf: `basepeak = yes`

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Intel-ic11.0-fp-linux64-revA.20090713.05.html
http://www.spec.org/cpu2006/flags/Intel-Linux64-Platform.20090713.02.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2006/flags/Intel-ic11.0-fp-linux64-revA.20090713.05.xml
http://www.spec.org/cpu2006/flags/Intel-Linux64-Platform.20090713.02.xml

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Tue Jul 22 22:17:54 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 14 October 2008.