SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM Power 570 (4.2 GHz, 32 core)

SPECint®_rate2006 = 832

SPECint_rate_base2006 = 661

CPU2006 license: 11
Test sponsor: IBM Corporation
Tested by: IBM Corporation

Test date: Sep-2008
Hardware Availability: Nov-2008
Software Availability: Nov-2008

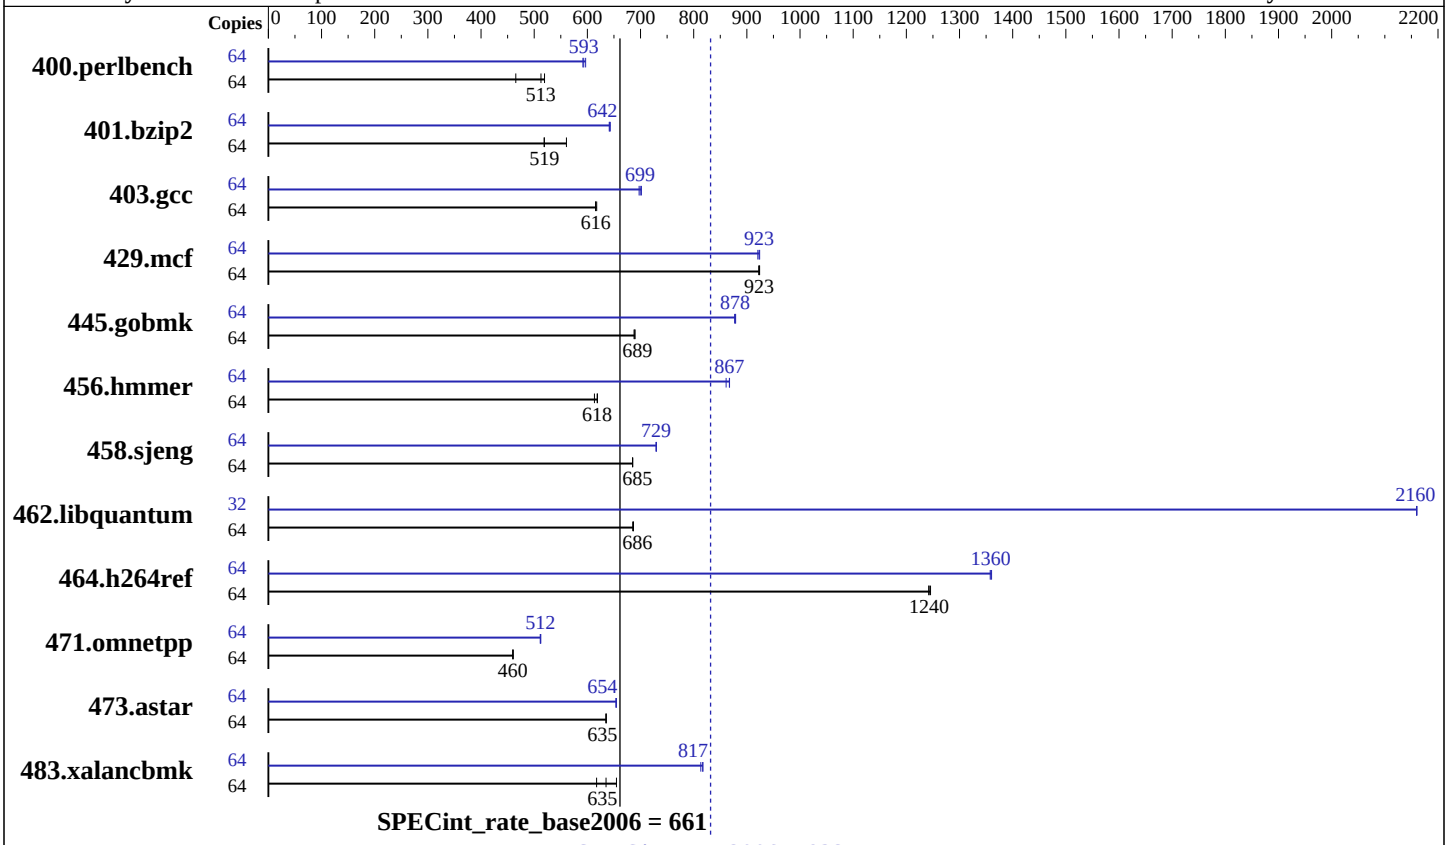

Hardware

CPU Name:	POWER6+
CPU Characteristics:	
CPU MHz:	4200
FPU:	Integrated
CPU(s) enabled:	32 cores, 16 chips, 2 cores/chip, 2 threads/core
CPU(s) orderable:	4,8,16,24,32 cores
Primary Cache:	64 KB I + 64 KB D on chip per core
Secondary Cache:	4 MB I+D on chip per core
L3 Cache:	32 MB I+D off chip per chip
Other Cache:	None
Memory:	128 GB (64x2 GB) DDR2 667 MHz
Disk Subsystem:	4x73 GB 4x146 GB SAS 15K RPM
Other Hardware:	None

Software

Operating System:	IBM AIX V6.1 with the 6100-02 Technology Level
Compiler:	IBM XL C/C++ V10.1 for AIX
Auto Parallel:	No
File System:	AIX/JFS2
System State:	Multi-user
Base Pointers:	32-bit
Peak Pointers:	32/64-bit
Other Software:	None

SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM Power 570 (4.2 GHz, 32 core)

SPECint_rate2006 = 832

SPECint_rate_base2006 = 661

CPU2006 license: 11
Test sponsor: IBM Corporation
Tested by: IBM Corporation

Test date: Sep-2008
Hardware Availability: Nov-2008
Software Availability: Nov-2008

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	64	1204	519	1344	465	**1219**	**513**	64	1048	597	**1054**	**593**	1057	592
401.bzip2	64	1102	561	1191	519	**1190**	**519**	64	960	643	963	641	**962**	**642**
403.gcc	64	**837**	**616**	834	618	837	616	64	**737**	**699**	734	702	739	697
429.mcf	64	**632**	**923**	633	922	632	924	64	632	924	**632**	**923**	634	921
445.gobmk	64	976	688	**974**	**689**	974	689	64	764	879	**765**	**878**	766	877
456.hmmer	64	965	619	974	613	**965**	**618**	64	688	867	**689**	**867**	694	861
458.sjeng	64	1131	685	1130	685	**1130**	**685**	64	**1062**	**729**	1061	730	1062	729
462.libquantum	64	1931	687	1935	685	**1932**	**686**	32	307	2160	**307**	**2160**	307	2160
464.h264ref	64	1140	1240	1137	1250	**1139**	**1240**	64	**1042**	**1360**	1043	1360	1041	1360
471.omnetpp	64	870	460	868	461	**870**	**460**	64	**781**	**512**	781	512	782	511
473.astar	64	**707**	**635**	707	635	708	635	64	687	654	**687**	**654**	686	655
483.xalancbmk	64	674	655	**695**	**635**	715	617	64	**541**	**817**	540	817	543	813

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Peak Tuning Notes

```
fdpr binary optimization tool used for 400.perlbench 401.bzip2 403.gcc 456.hmmer 458.sjeng
                                       464.h264ref 471.omnetpp 473.astar 483.xalancbmk
  with options -O4 -vrox -pbsi
fdpr binary optimization tool used for 445.gobmk
  with options -O3 -vrox -sdp 9
fdpr binary optimization tool used for 429.mcf
  with options -kr -lap -lro -nop -nopr -RC -tb -tlo -vro -lu 9 -rt 0.95 -sdpla 8
               -sdpms 512 -shci 15 -si -sidf 45 -siht 10 -lun 13 -m ppc405 -vrox -gcpyp
fdpr binary optimization tool used for 462.libquantum
  with options -bf -bp -dp -hr -kr -las -lro -nop -RC -RD -tlo -vro -A 32 -isf 12
               -lu 9 -rt 0.00 -ihf 20 -sdp 9 -shci 90 -si -sidf 50 -vrox -dce
```

Submit Notes

```
The config file option 'submit' was used
to assign benchmark copy to specific kernel thread using
the "bindprocessor" command (see flags file for details).
```

Operating System Notes

```
all ulimits set to unlimited.
6400 16M large pages defined with vmo command
```

Platform Notes

```
System set to "Enhanced" mode when defining partition on HMC.
```

General Notes

```
Environment variables set by runspec before the start of the run:
MALLOCOPTIONS = "pool"
MEMORY_AFFINITY = "MCM"
XLFRTEOPTS = "intrinthds=1"

 See the flags file for details on settings.
```

Base Compiler Invocation

C benchmarks:
```
/usr/vac/bin/xlc -qlanglvl=extc99
```

C++ benchmarks:
```
/usr/vacpp/bin/xlC
```

Base Portability Flags

400.perlbench: `-DSPEC_CPU_AIX`
462.libquantum: `-DSPEC_CPU_AIX`
464.h264ref: `-DSPEC_CPU_AIX -qchars=signed`
483.xalancbmk: `-DSPEC_CPU_AIX`

Base Optimization Flags

C benchmarks:
```
-bmaxdata:0x50000000 -O5 -qlargepage -D_ILS_MACROS -qalias=noansi
-qalloca -blpdata
```

C++ benchmarks:
```
-bmaxdata:0x20000000 -O5 -qlargepage -D_ILS_MACROS -qrtti=all
-D__IBM_FAST_SET_MAP_ITERATOR -blpdata
```

Base Other Flags

C benchmarks:
```
-qipa=threads -qipa=noobject -qsuppress=1500-036
```

C++ benchmarks:
```
-qipa=threads -qipa=noobject -qsuppress=1500-036
```

Peak Compiler Invocation

C benchmarks:
```
/usr/vac/bin/xlc -qlanglvl=extc99
```

C++ benchmarks:
```
/usr/vacpp/bin/xlC
```

Peak Portability Flags

400.perlbench: -DSPEC_CPU_AIX
462.libquantum: -DSPEC_CPU_AIX
464.h264ref: -DSPEC_CPU_AIX -qchars=signed
483.xalancbmk: -DSPEC_CPU_AIX

Peak Optimization Flags

C benchmarks:

400.perlbench: -bmaxdata:0x50000000 -qpdf1(pass 1) -qpdf2(pass 2) -O5
-qlargepage -D_ILS_MACROS -qalias=noansi -qfdpr -blpdata

401.bzip2: -bmaxdata:0x4fffffc -qpdf1(pass 1) -qpdf2(pass 2) -O4
-qlargepage -D_ILS_MACROS -qfdpr -blpdata

403.gcc: -bmaxdata:0x50000000 -qpdf1(pass 1) -qpdf2(pass 2) -O4
-qlargepage -D_ILS_MACROS -qalloca -qfdpr -blpdata

429.mcf: -bmaxdata:0x50000000 -O5 -qlargepage -D_ILS_MACROS -qfdpr
-blpdata

445.gobmk: -qpdf1(pass 1) -qpdf2(pass 2) -O3 -qarch=auto -qtune=auto
-qlargepage -D_ILS_MACROS -qfdpr -blpdata

456.hmmer: -qpdf1(pass 1) -qpdf2(pass 2) -O5 -qenablevmx -qvecnvol
-D_ILS_MACROS -qfdpr -bdatapsize:64K -bstackpsize:64K
-btextpsize:64K

458.sjeng: -O5 -qlargepage -qenablevmx -qvecnvol -D_ILS_MACROS
-qfdpr -blpdata

462.libquantum: -qpdf1(pass 1) -qpdf2(pass 2) -O5 -qlargepage -q64
-D_ILS_MACROS -qfdpr -blpdata

464.h264ref: -qpdf1(pass 1) -qpdf2(pass 2) -O5 -D_ILS_MACROS -qfdpr
-bdatapsize:64K -bstackpsize:64K -btextpsize:64K

Continued on next page

Peak Optimization Flags (Continued)

C++ benchmarks:

471.omnetpp: -bmaxdata:0x20000000 -qpdf1(pass 1) -qpdf2(pass 2) -O5 -qlargepage -D_ILS_MACROS -qfdpr -qalign=natural -qrtti=all -qinlglue -D__IBM_FAST_SET_MAP_ITERATOR -blpdata

473.astar: -bmaxdata:0x20000000 -O5 -qlargepage -D_ILS_MACROS -qfdpr -qenablevmx -qvecnvol -qinlglue -qalign=natural -blpdata

483.xalancbmk: -bmaxdata:0x20000000 -qpdf1(pass 1) -qpdf2(pass 2) -O5 -qlargepage -D_ILS_MACROS -qfdpr -qinlglue -D__IBM_FAST_VECTOR -blpdata

Peak Other Flags

C benchmarks:
-qipa=threads -qipa=noobject -qsuppress=1500-036

C++ benchmarks:
-qipa=threads -qipa=noobject -qsuppress=1500-036

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/IBM-AIX.html
http://www.spec.org/cpu2006/flags/IBM-XL.20090713.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2006/flags/IBM-AIX.xml
http://www.spec.org/cpu2006/flags/IBM-XL.20090713.xml

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Tue Jul 22 20:42:26 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 29 October 2008.