SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

NovaScale B260
(Intel Xeon E5405, 2.00 GHz)

SPECfp®2006 = 17.3

SPECfp_base2006 = 14.7

CPU2006 license: 20
Test sponsor: Bull SAS
Tested by: Bull SAS

Test date: Sep-2008
Hardware Availability: Jan-2008
Software Availability: Nov-2007

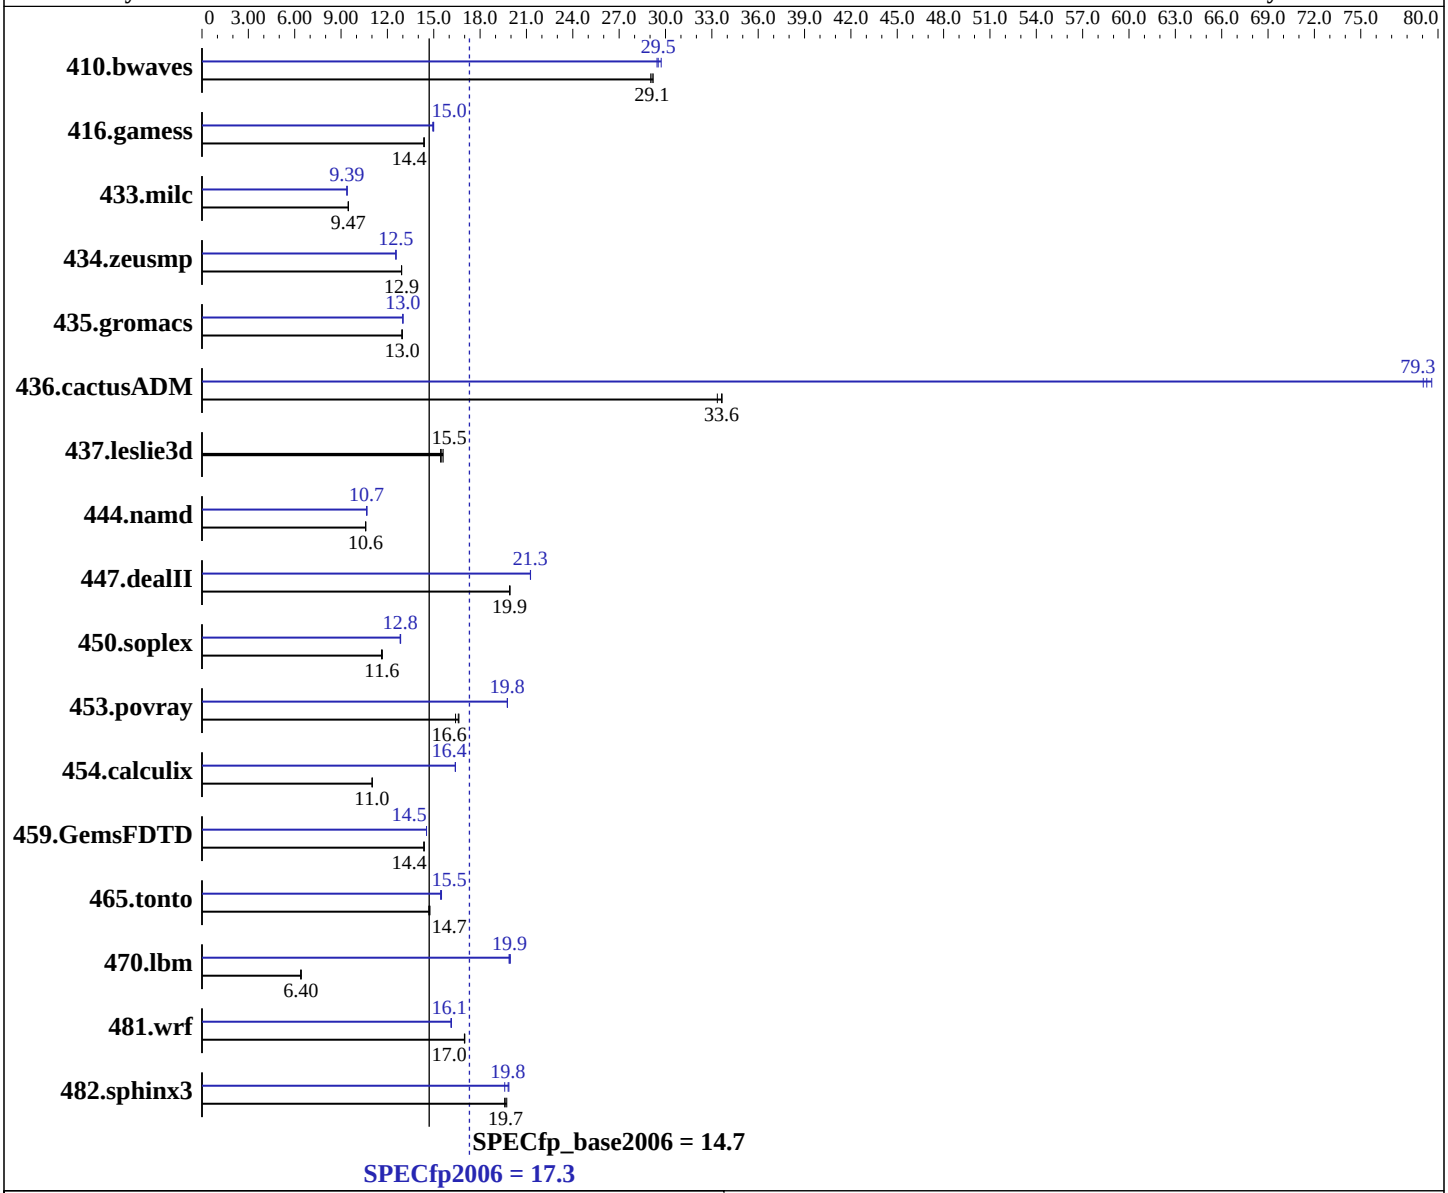

Hardware

CPU Name:	Intel Xeon E5405
CPU Characteristics:	1333 MHz system bus
CPU MHz:	2000
FPU:	Integrated
CPU(s) enabled:	8 cores, 2 chips, 4 cores/chip
CPU(s) orderable:	1,2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	12 MB I+D on chip per chip, 6 MB shared / 2 cores

Continued on next page

Software

Operating System:	SUSE LINUX Enterprise Server 10 (x86_64) SP1 Kernel 2.6.16.46-0.12-smp
Compiler:	Intel C++ and Fortran Compiler 10.1 for Linux Build 20070913 Package ID: l_cc_p_10.1.008, l_fc_p_10.1.008
Auto Parallel:	Yes
File System:	ext2
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

NovaScale B260
(Intel Xeon E5405, 2.00 GHz)

SPECfp2006 = 17.3

SPECfp_base2006 = 14.7

CPU2006 license: 20
Test sponsor: Bull SAS
Tested by: Bull SAS

Test date: Sep-2008
Hardware Availability: Jan-2008
Software Availability: Nov-2007

L3 Cache: None
Other Cache: None
Memory: 16 GB (4x4 GB) FB-DIMM PC2-5300F ECC CL5
Disk Subsystem: 1x73 GB SAS, 15000 RPM
Other Hardware: None

Peak Pointers: 32/64-bit
Other Software: Binutils 2.17.50.0.15

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	468	29.0	**467**	**29.1**	465	29.2	457	29.7	461	29.5	**460**	**29.5**
416.gamess	**1362**	**14.4**	1364	14.4	1361	14.4	1306	15.0	**1307**	**15.0**	1311	14.9
433.milc	**969**	**9.47**	970	9.47	969	9.48	977	9.39	979	9.38	**978**	**9.39**
434.zeusmp	705	12.9	**705**	**12.9**	704	12.9	724	12.6	725	12.5	**725**	**12.5**
435.gromacs	**551**	**13.0**	552	12.9	551	13.0	549	13.0	549	13.0	**549**	**13.0**
436.cactusADM	**355**	**33.6**	358	33.4	355	33.7	**151**	**79.3**	151	79.0	150	79.6
437.leslie3d	**606**	**15.5**	609	15.4	602	15.6	**606**	**15.5**	609	15.4	602	15.6
444.namd	757	10.6	757	10.6	**757**	**10.6**	**752**	**10.7**	753	10.7	751	10.7
447.dealII	574	19.9	**574**	**19.9**	575	19.9	538	21.3	538	21.3	**538**	**21.3**
450.soplex	**716**	**11.6**	718	11.6	714	11.7	650	12.8	649	12.9	**649**	**12.8**
453.povray	320	16.6	324	16.4	**321**	**16.6**	**269**	**19.8**	269	19.8	269	19.8
454.calculix	749	11.0	**749**	**11.0**	749	11.0	503	16.4	**503**	**16.4**	503	16.4
459.GemsFDTD	739	14.4	**739**	**14.4**	737	14.4	730	14.5	**730**	**14.5**	730	14.5
465.tonto	**669**	**14.7**	667	14.8	670	14.7	635	15.5	**637**	**15.5**	637	15.5
470.lbm	2151	6.39	**2148**	**6.40**	2138	6.43	**690**	**19.9**	691	19.9	688	20.0
481.wrf	657	17.0	658	17.0	**657**	**17.0**	**692**	**16.1**	692	16.1	693	16.1
482.sphinx3	988	19.7	**991**	**19.7**	995	19.6	981	19.9	995	19.6	**984**	**19.8**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

```
'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run
OMP_NUM_THREADS set to number of cores
KMP_AFFINITY set to physical,0
KMP_STACKSIZE set to 200M
```

Platform Notes

```
BIOS configuration:
Hardware Prefetcher Enabled
Adjacent Cache-Line Prefetch Enabled
```

General Notes

```
All benchmarks compiled in 64-bit mode except 450.soplex,
470.lbm and 482.sphinx3, at peak, are compiled in 32-bit mode
```

Base Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc

Fortran benchmarks:
ifort

Benchmarks using both Fortran and C:
icc ifort

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
-fast -parallel

C++ benchmarks:
-fast -parallel

Continued on next page

Base Optimization Flags (Continued)

Fortran benchmarks:
`-fast -parallel`

Benchmarks using both Fortran and C:
`-fast -parallel`

Peak Compiler Invocation

C benchmarks (except as noted below):
`/opt/intel/cc/10.1.008/bin/icc -L/opt/intel/cc/10.1.008/lib -I/opt/intel/cc/10.1.008/include`

433.milc: `icc`

C++ benchmarks (except as noted below):
`icpc`

450.soplex: `/opt/intel/cc/10.1.008/bin/icpc -L/opt/intel/cc/10.1.008/lib -I/opt/intel/cc/10.1.008/include`

Fortran benchmarks:
`ifort`

Benchmarks using both Fortran and C:
`icc ifort`

Peak Portability Flags

410.bwaves: `-DSPEC_CPU_LP64`
416.gamess: `-DSPEC_CPU_LP64`
433.milc: `-DSPEC_CPU_LP64`
434.zeusmp: `-DSPEC_CPU_LP64`
435.gromacs: `-DSPEC_CPU_LP64 -nofor_main`
436.cactusADM: `-DSPEC_CPU_LP64 -nofor_main`
437.leslie3d: `-DSPEC_CPU_LP64`
444.namd: `-DSPEC_CPU_LP64`
447.dealII: `-DSPEC_CPU_LP64`
453.povray: `-DSPEC_CPU_LP64`
454.calculix: `-DSPEC_CPU_LP64 -nofor_main`
459.GemsFDTD: `-DSPEC_CPU_LP64`
465.tonto: `-DSPEC_CPU_LP64`
481.wrf: `-DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX`

Peak Optimization Flags

C benchmarks:

433.milc: -prof-gen(pass 1) -prof-use(pass 2) -fast -fno-alias -auto-ilp32

470.lbm: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2 -scalar-rep- -prefetch -opt-malloc-options=3

482.sphinx3: -fast -unroll2

C++ benchmarks:

444.namd: -prof-gen(pass 1) -prof-use(pass 2) -fast -fno-alias -auto-ilp32

447.dealII: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2 -ansi-alias -scalar-rep-

450.soplex: -prof-gen(pass 1) -prof-use(pass 2) -fast -opt-malloc-options=3

453.povray: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: -fast -prefetch -parallel

416.gamess: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2 -Ob0 -ansi-alias -scalar-rep-

434.zeusmp: -prof-gen(pass 1) -prof-use(pass 2) -fast

437.leslie3d: basepeak = yes

459.GemsFDTD: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2 -Ob0 -prefetch -parallel

465.tonto: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll4 -auto

Benchmarks using both Fortran and C:

435.gromacs: -prof-gen(pass 1) -prof-use(pass 2) -fast -prefetch -auto-ilp32

436.cactusADM: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2 -prefetch -parallel -auto-ilp32

454.calculix: -fast -unroll-aggressive -auto-ilp32

Continued on next page

Peak Optimization Flags (Continued)

481.wrf: `-fast -parallel -prefetch -auto-ilp32`

The flags file that was used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/EM64T_Intel101_fp_flags.20090713.html`

You can also download the XML flags source by saving the following link:
`http://www.spec.org/cpu2006/flags/EM64T_Intel101_fp_flags.20090713.xml`

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Tue Jul 22 20:36:48 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 29 October 2008.