



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge M905 (AMD Opteron 8360 SE, 2.50 GHz)

SPECfp®2006 = 15.9

SPECfp_base2006 = 14.1

CPU2006 license: 55


Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date: Sep-2008

Hardware Availability: Oct-2008

Software Availability: Aug-2008

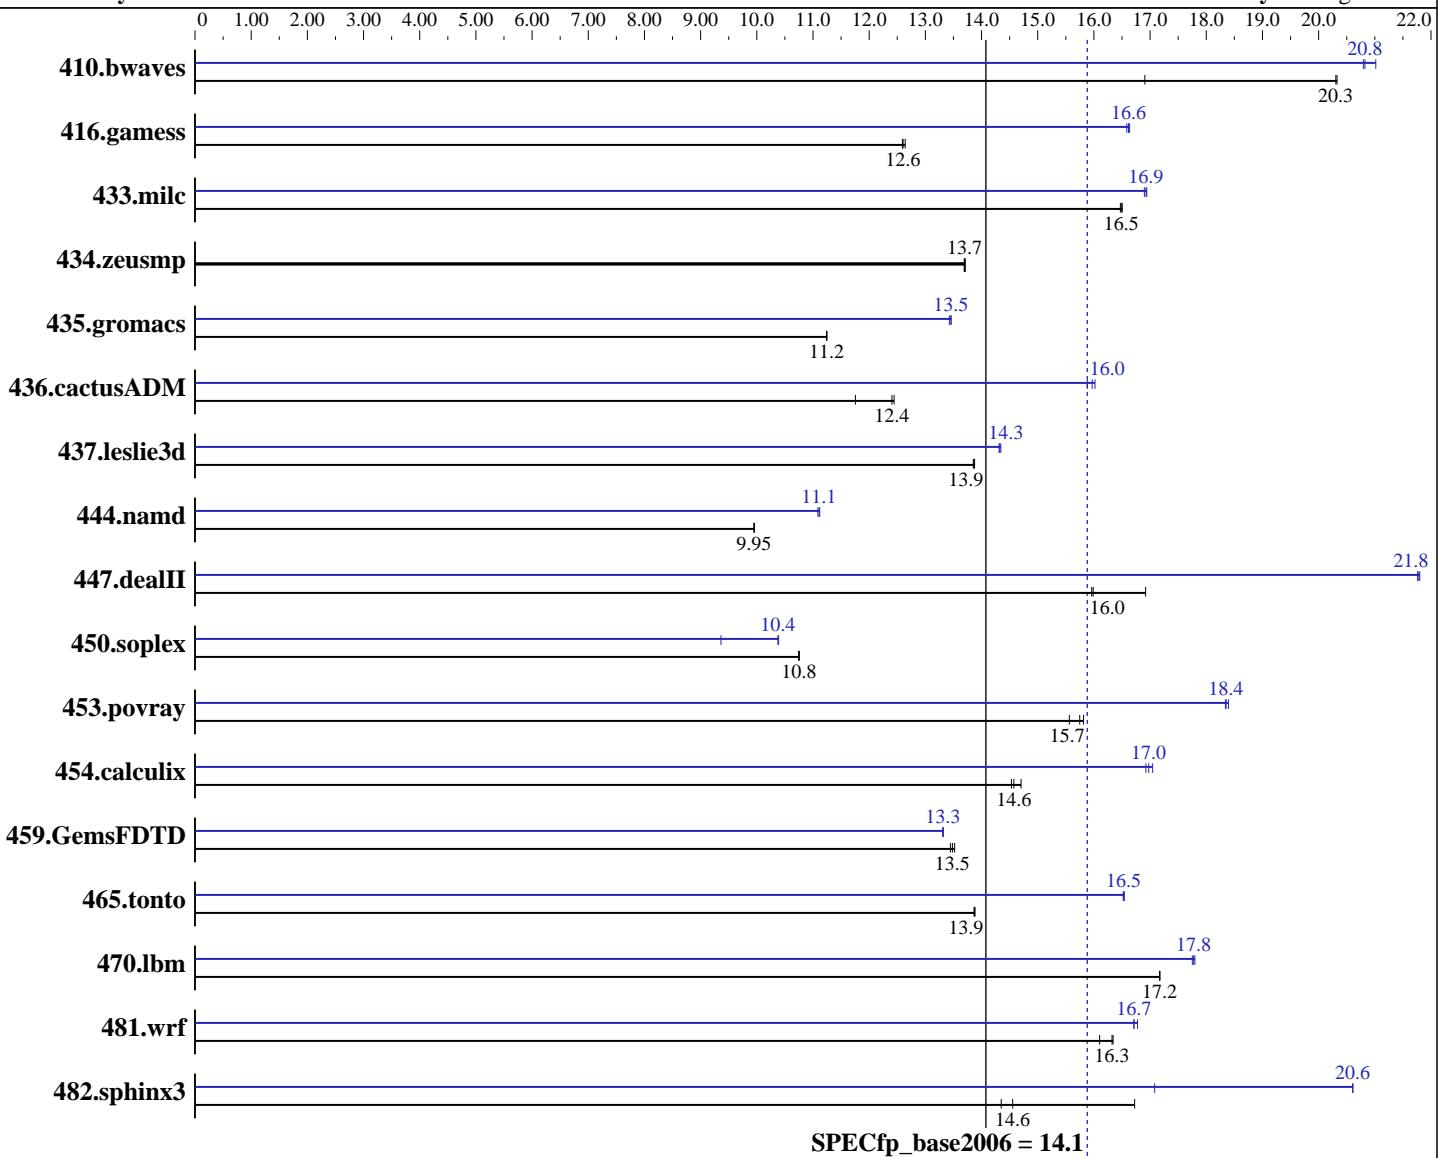

Hardware		Software	
CPU Name:	AMD Opteron 8360 SE	Operating System:	SUSE Linux Enterprise Server 10 (x86_64) SP2, Kernel 2.6.16-60.0.21-smp
CPU Characteristics:		Compiler:	PGI Server Complete Version 7.2
CPU MHz:	2500	Auto Parallel:	PathScale Compiler Suite Version 3.2
FPU:	Integrated	File System:	No
CPU(s) enabled:	16 cores, 4 chips, 4 cores/chip	System State:	ReiserFS
CPU(s) orderable:	4 chips	Base Pointers:	Run level 3 (multi-user)
Primary Cache:	64 KB I + 64 KB D on chip per core	Peak Pointers:	64-bit
Secondary Cache:	512 KB I+D on chip per core		32/64-bit

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp2006 = 15.9

PowerEdge M905 (AMD Opteron 8360 SE, 2.50 GHz)

SPECfp_base2006 = 14.1

CPU2006 license: 55

Test date: Sep-2008

Test sponsor: Dell Inc.

Hardware Availability: Oct-2008

Tested by: Dell Inc.

Software Availability: Aug-2008

L3 Cache: 2 MB I+D on chip per chip
 Other Cache: None
 Memory: 32 GB (16 x 2 GB 667 MHz CL5 DDR2 Dual Rank)
 Disk Subsystem: 1 x 36 GB SAS 15000 RPM (OS), 1 x 73 GB SAS 10000 RPM (CPU2006)
 Other Hardware: None

Other Software: None

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	669	20.3	669	20.3	804	16.9	647	21.0	653	20.8	653	20.8
416.gamess	1555	12.6	1549	12.6	1554	12.6	1177	16.6	1178	16.6	1181	16.6
433.milc	557	16.5	556	16.5	557	16.5	543	16.9	542	16.9	542	16.9
434.zeusmp	664	13.7	665	13.7	664	13.7	664	13.7	665	13.7	664	13.7
435.gromacs	635	11.2	635	11.2	635	11.2	531	13.5	531	13.5	532	13.4
436.cactusADM	960	12.4	963	12.4	1017	11.8	746	16.0	752	15.9	748	16.0
437.leslie3d	679	13.9	678	13.9	677	13.9	656	14.3	657	14.3	655	14.3
444.namd	806	9.95	806	9.95	805	9.96	722	11.1	723	11.1	721	11.1
447.dealII	676	16.9	716	16.0	717	16.0	525	21.8	525	21.8	526	21.8
450.soplex	775	10.8	776	10.7	776	10.8	804	10.4	803	10.4	891	9.36
453.povray	336	15.8	338	15.7	342	15.6	290	18.4	289	18.4	290	18.3
454.calculix	561	14.7	568	14.5	566	14.6	487	16.9	486	17.0	484	17.0
459.GemsFDTD	789	13.4	785	13.5	787	13.5	797	13.3	797	13.3	797	13.3
465.tonto	709	13.9	710	13.9	709	13.9	596	16.5	595	16.5	595	16.5
470.lbm	800	17.2	800	17.2	800	17.2	774	17.8	773	17.8	772	17.8
481.wrf	684	16.3	684	16.3	694	16.1	668	16.7	668	16.7	666	16.8
482.sphinx3	1165	16.7	1339	14.6	1358	14.4	946	20.6	1141	17.1	946	20.6

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
 'numactl' was used to bind copies to the cores

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size
 'ulimit -l 4915200' was used to set environment locked pages in memory limit
 Environment variable PGI_HUGE_PAGES set to 896
 Set vm.nr_hugepages=3584 in /etc/sysctl.conf
 mount -t hugetlbfs nodev /mnt/hugepages



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge M905 (AMD Opteron 8360 SE, 2.50 GHz)

SPECfp2006 = 15.9

CPU2006 license: 55

Test date: Sep-2008

Test sponsor: Dell Inc.

Hardware Availability: Oct-2008

Tested by: Dell Inc.

Software Availability: Aug-2008

General Notes

Environment variables set by runspec before the start of the run:

```
LD_LIBRARY_PATH = "/root/cpu2006-1.1/amd729gh-libs:/root/cpu2006-1.1/amd729gh-libs/32:\$LD_LIBRARY_PATH"
```

Base Compiler Invocation

C benchmarks:

pgcc

C++ benchmarks:

pgcpp

Fortran benchmarks:

pgf95

Benchmarks using both Fortran and C:

pgcc pgf95

Base Portability Flags

```

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
        433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -Mnomain
436.cactusADM: -DSPEC_CPU_LP64 -Mnomain
        437.leslie3d: -DSPEC_CPU_LP64
        444.namd: -DSPEC_CPU_LP64
        447.dealII: -DSPEC_CPU_LP64
        450.soplex: -DSPEC_CPU_LP64
        453.povray: -DSPEC_CPU_LP64
        454.calculix: -DSPEC_CPU_LP64 -Mnomain
459.GemsFDTD: -DSPEC_CPU_LP64
        465.tonto: -DSPEC_CPU_LP64
        470.lbm: -DSPEC_CPU_LP64
        481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

Base Optimization Flags

C benchmarks:

```
-fastsse -Msmartralloc=huge:150 -Mfprelaxed -Mipa=fast -Mipa=inline
-tp barcelona-64 -Bstatic_pgi
```

C++ benchmarks:

```
-fastsse -Msmartralloc=huge:150 -Mfprelaxed --zc_eh -Mipa=fast
-Mipa=inline -tp barcelona-64 -Bstatic_pgi
```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge M905 (AMD Opteron 8360 SE, 2.50 GHz)

SPECfp2006 = 15.9

CPU2006 license: 55

Test date: Sep-2008

Test sponsor: Dell Inc.

Hardware Availability: Oct-2008

Tested by: Dell Inc.

Software Availability: Aug-2008

Base Optimization Flags (Continued)

Fortran benchmarks:

```
-fastsse -Mfprelaxed -Msmartralloc=huge:150 -Mipa=fast -Mipa=inline  
-tp barcelona-64 -Bstatic_pgi
```

Benchmarks using both Fortran and C:

```
-fastsse -Msmartralloc=huge:150 -Mfprelaxed -Mipa=fast -Mipa=inline  
-tp barcelona-64 -Bstatic_pgi
```

Base Other Flags

C benchmarks:

```
-Mipa=jobs:4
```

C++ benchmarks:

```
-Mipa=jobs:4
```

Fortran benchmarks:

```
-Mipa=jobs:4
```

Benchmarks using both Fortran and C:

```
-Mipa=jobs:4
```

Peak Compiler Invocation

C benchmarks (except as noted below):

```
pgcc
```

470.lbm: pathcc

C++ benchmarks (except as noted below):

```
pathCC
```

444.namd: pgcpp

Fortran benchmarks (except as noted below):

```
pgf95
```

416.gamess: pathf95

459.GemsFDTD: pathf95

465.tonto: pathf95

Benchmarks using both Fortran and C (except as noted below):

```
pgcc pgf95
```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge M905 (AMD Opteron 8360 SE, 2.50 GHz)

SPECfp2006 = 15.9

CPU2006 license: 55

Test date: Sep-2008

Test sponsor: Dell Inc.

Hardware Availability: Oct-2008

Tested by: Dell Inc.

Software Availability: Aug-2008

Peak Compiler Invocation (Continued)

436.cactusADM: pathcc pathf95

Peak Portability Flags

```

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
 433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -Mnomain
436.cactusADM: -DSPEC_CPU_LP64 -fno-second-underscore
 437.leslie3d: -DSPEC_CPU_LP64
    444.namd: -DSPEC_CPU_LP64
    453.povray: -DSPEC_CPU_LP64
 454.calculix: -DSPEC_CPU_LP64 -Mnomain
459.GemsFDTD: -DSPEC_CPU_LP64
 465.tonto: -DSPEC_CPU_LP64
 470.lbm: -DSPEC_CPU_LP64
 481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

Peak Optimization Flags

C benchmarks:

```

433.milc: -fastsse -Msmartralloc=huge:150 -Msafeptr -Mfprelaxed
  -Mipa=inline -Mipa=arg -Mipa=const -Mipa=ptr -Mipa=shape
  -tp barcelona-64 -Bstatic_pgi

470.lbm: -march=barcelona -Ofast -CG:sse_cse_regs=0
  -CG:locs_shallow_depth=1 -m3dnow

482.sphinx3: -Mpfi=indirect(pass 1) -Mpfo=indirect(pass 2)
  -Mipa=fast(pass 2) -Mipa=inline(pass 2) -fastsse
  -Mfprelaxed -Msmartralloc -tp barcelona-64 -Bstatic_pgi

```

C++ benchmarks:

```

444.namd: -Mpfi(pass 1) -Mpfo(pass 2) -Mipa=fast(pass 2)
  -Mipa=inline(pass 2) -fastsse -Munroll=n:4 -Munroll=m:8
  -Msmartralloc=huge:150 -Mnodechk -Mfprelaxed --zc_eh
  -tp barcelona-64 -Bstatic_pgi

447.dealII: -march=barcelona -Ofast -static -INLINE:aggressive=on
  -fno-exceptions -m32

```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge M905 (AMD Opteron 8360 SE, 2.50 GHz)

SPECfp2006 =

15.9

SPECfp_base2006 =

14.1

CPU2006 license: 55

Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date:

Sep-2008

Hardware Availability: Oct-2008

Software Availability: Aug-2008

Peak Optimization Flags (Continued)

450.soplex: -march=barcelona -fb_create fbdata(pass 1)
 -fb_opt fbdata(pass 2) -O3 -TENV:frame_pointer=off
 -LNO:prefetch=1 -OPT:malloc_alg=1 -CG:load_exe=0 -m32

453.povray: -march=barcelona -fb_create fbdata(pass 1)
 -fb_opt fbdata(pass 2) -Ofast

Fortran benchmarks:

410.bwaves: -Mpfi(pass 1) -Mpfo(pass 2) -Mipa=fast(pass 2)
 -Mipa=inline(pass 2) -fastsse -Msmaralloc
 -Mprefetch=distance:12 -Mprefetch=nta -Mpre -Mfprelaxed
 -tp barcelona-64 -Bstatic_pgi

416.gamess: -march=barcelona -fb_create fbdata(pass 1)
 -fb_opt fbdata(pass 2) -O2 -OPT:Ofast -OPT:ro=3
 -OPT:unroll_size=256

434.zeusmp: basepeak = yes

437.leslie3d: -Mpfi=indirect(pass 1) -Mpfo=indirect(pass 2)
 -Mipa=fast(pass 2) -Mipa=inline(pass 2) -fastsse
 -Mvect=fuse -Msmaralloc=huge:150 -Mprefetch=distance:8
 -Mprefetch=t0 -Mfprelaxed -tp barcelona-64 -Bstatic_pgi

459.GemsFDTD: -march=barcelona -Ofast -LNO:fission=2 -LNO:simd=2
 -LNO:prefetch_ahead=1 -CG:load_exe=0

465.tonto: -march=barcelona -Ofast -OPT:alias=no_f90_pointer_alias
 -LNO:blocking=off -CG:load_exe=1 -IPA:plimit=525

Benchmarks using both Fortran and C:

435.gromacs: -fastsse -Msmaralloc=huge:150 -Mfprelaxed -Mfpapprox=rsqrt
 -Mipa=fast -Mipa=inline -tp barcelona-64 -Bstatic_pgi

436.cactusADM: -march=barcelona -fb_create fbdata(pass 1)
 -fb_opt fbdata(pass 2) -Ofast -LNO:blocking=off

454.calculix: -Mpfi=indirect(pass 1) -Mpfo=indirect(pass 2)
 -Mipa=fast(pass 2) -Mipa=inline(pass 2) -fastsse
 -Msmaralloc=huge:150 -Mprefetch=t0 -Mpre -Mfprelaxed
 -tp barcelona-64 -Bstatic_pgi

481.wrf: -fastsse -Mvect=noaltcode -Msmaralloc
 -Mprefetch=distance:8 -Mfprelaxed -tp barcelona-64
 -Bstatic_pgi



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge M905 (AMD Opteron 8360 SE, 2.50 GHz)

SPECfp2006 = 15.9

CPU2006 license: 55

Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date: Sep-2008

Hardware Availability: Oct-2008

Software Availability: Aug-2008

Peak Other Flags

C benchmarks (except as noted below):

-Mipa=jobs : 4(pass 2)

470.lbm: No flags used

C++ benchmarks:

444.namd: -Mipa=jobs : 4(pass 2)

Fortran benchmarks (except as noted below):

-Mipa=jobs : 4(pass 2)

416.gamess: No flags used

459.GemsFDTD: No flags used

465.tonto: No flags used

Benchmarks using both Fortran and C (except as noted below):

-Mipa=jobs : 4(pass 2)

436.cactusADM: No flags used

481.wrf: No flags used

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/amd729gh-flags.html>

<http://www.spec.org/cpu2006/flags/amd-platform.20090713.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/amd729gh-flags.xml>

<http://www.spec.org/cpu2006/flags/amd-platform.20090713.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.

Report generated on Tue Jul 22 20:48:10 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 29 October 2008.