SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM System x3550 (Intel Xeon L5410)

SPECfp®_rate2006 = 70.2

SPECfp_rate_base2006 = 65.5

CPU2006 license: 11
Test sponsor: IBM Corporation
Tested by: IBM Corporation

Test date: Oct-2008
Hardware Availability: Nov-2008
Software Availability: Nov-2008

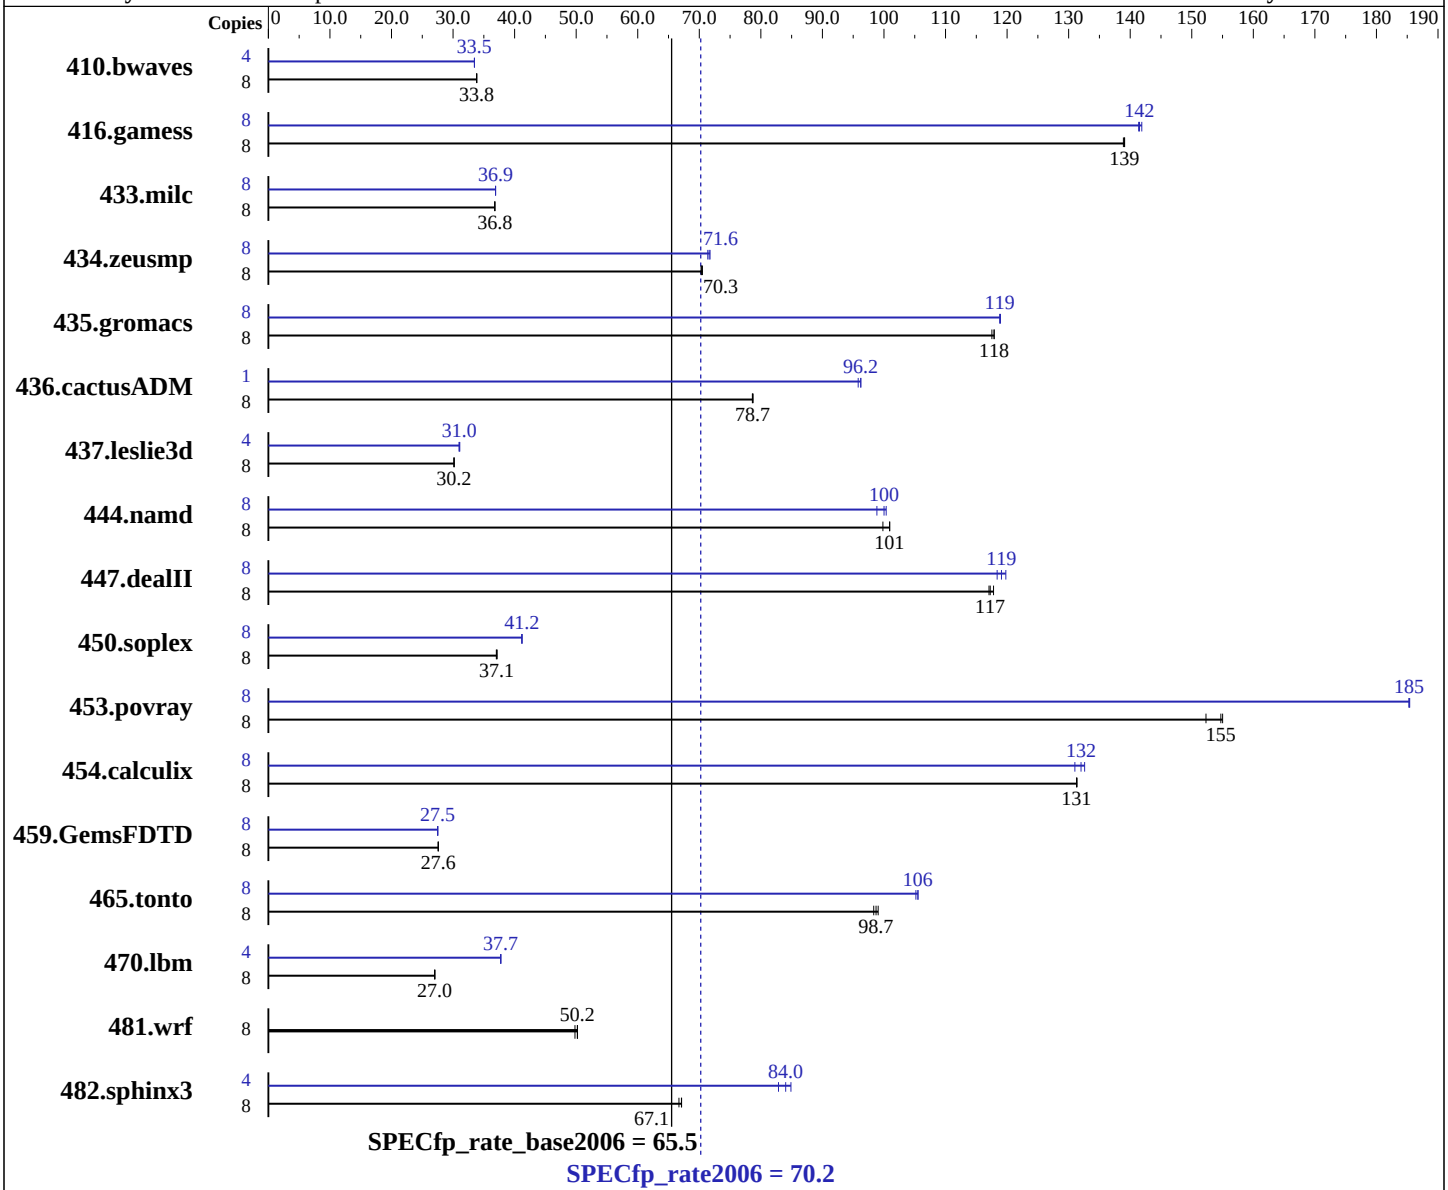

Hardware

CPU Name:	Intel Xeon L5410
CPU Characteristics:	1333MHz system bus
CPU MHz:	2333
FPU:	Integrated
CPU(s) enabled:	8 cores, 2 chips, 4 cores/chip
CPU(s) orderable:	1,2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	12 MB I+D on chip per chip, 6 MB shared / 2 cores

Continued on next page

Software

Operating System:	SuSE Linux Enterprise Server 10 (x86_64) SP1, Kernel 2.6.16.46-0.12-smp
Compiler:	Intel C++ and Fortran Compiler 11.0 for Linux Build 20080730 Package ID: l_cproc_b_11.0.042, l_fproc_b_11.0.042
Auto Parallel:	Yes
File System:	ReiserFS
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM System x3550 (Intel Xeon L5410)

SPECfp_rate2006 = 70.2

SPECfp_rate_base2006 = 65.5

CPU2006 license: 11
Test sponsor: IBM Corporation
Tested by: IBM Corporation

Test date: Oct-2008
Hardware Availability: Nov-2008
Software Availability: Nov-2008

L3 Cache: None
Other Cache: None
Memory: 16 GB (8 x 2 GB DDR2-5300F ECC)
Disk Subsystem: 1 x 36 GB SAS, 15000 RPM
Other Hardware: None

Peak Pointers: 32/64-bit
Other Software: Binutils 2.18.50.0.7.20080502

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	8	3214	33.8	3211	33.9	**3214**	**33.8**	4	1625	33.5	1624	33.5	**1624**	**33.5**
416.gamess	8	1128	139	1126	139	**1126**	**139**	8	1104	142	**1107**	**142**	1108	141
433.milc	8	1996	36.8	**1996**	**36.8**	1997	36.8	8	1990	36.9	**1990**	**36.9**	1990	36.9
434.zeusmp	8	1035	70.3	1032	70.5	**1035**	**70.3**	8	1015	71.7	1020	71.4	**1017**	**71.6**
435.gromacs	8	**485**	**118**	484	118	486	118	8	480	119	481	119	**481**	**119**
436.cactusADM	8	1216	78.6	**1215**	**78.7**	1214	78.7	1	125	95.8	**124**	**96.2**	124	96.2
437.leslie3d	8	**2492**	**30.2**	2491	30.2	2495	30.1	4	1213	31.0	1209	31.1	**1212**	**31.0**
444.namd	8	**636**	**101**	636	101	643	99.8	8	639	100	649	98.9	**642**	**100**
447.dealII	8	782	117	**780**	**117**	777	118	8	**769**	**119**	773	118	764	120
450.soplex	8	1796	37.2	1802	37.0	**1799**	**37.1**	8	1619	41.2	1621	41.2	**1620**	**41.2**
453.povray	8	279	152	275	155	**275**	**155**	8	230	185	**230**	**185**	230	185
454.calculix	8	**503**	**131**	503	131	502	131	8	504	131	498	133	**500**	**132**
459.GemsFDTD	8	3075	27.6	**3076**	**27.6**	3076	27.6	8	3087	27.5	**3086**	**27.5**	3085	27.5
465.tonto	8	**797**	**98.7**	801	98.3	795	99.1	8	746	106	**746**	**106**	748	105
470.lbm	8	4068	27.0	**4067**	**27.0**	4065	27.0	4	1457	37.7	**1456**	**37.7**	1455	37.8
481.wrf	8	**1781**	**50.2**	1794	49.8	1779	50.2	8	**1781**	**50.2**	1794	49.8	1779	50.2
482.sphinx3	8	2323	67.1	**2324**	**67.1**	2338	66.7	4	918	84.9	941	82.9	**928**	**84.0**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The config file option 'submit' was used.
 taskset was used to bind processes to cores except for 436.cactusADM peak
```

General Notes

```
OMP_NUM_THREADS set to number of processors
KMP_AFFINITY set to "physical,0"
KMP_STACKSIZE set to 64M
Hardware Prefetch Disabled, Adjacent Sector Prefetch Disabled
'ulimit -s unlimited' was used to set the stack size to unlimited prior to run
```

Base Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc

Fortran benchmarks:
ifort

Benchmarks using both Fortran and C:
icc ifort

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
-xSSE4.1 -ipo -O3 -no-prec-div -static -opt-prefetch

C++ benchmarks:
-xSSE4.1 -ipo -O3 -no-prec-div -static -opt-prefetch

Fortran benchmarks:
-xSSE4.1 -ipo -O3 -no-prec-div -static -opt-prefetch

Benchmarks using both Fortran and C:
-xSSE4.1 -ipo -O3 -no-prec-div -static -opt-prefetch

Peak Compiler Invocation

C benchmarks (except as noted below):
```
icc
```

482.sphinx3: `/opt/intel/Compiler/11.0/042/bin/ia32/icc -L/opt/intel/Compiler/11.0/042/ipp/ia32/lib -I/opt/intel/Compiler/11.0/042/ipp/ia32/include`

C++ benchmarks (except as noted below):
```
icpc
```

450.soplex: `/opt/intel/Compiler/11.0/042/bin/ia32/icpc -L/opt/intel/Compiler/11.0/042/ipp/ia32/lib -I/opt/intel/Compiler/11.0/042/ipp/ia32/include`

Fortran benchmarks (except as noted below):
```
ifort
```

437.leslie3d: `/opt/intel/Compiler/11.0/042/bin/ia32/ifort -L/opt/intel/Compiler/11.0/042/ipp/ia32/lib -I/opt/intel/Compiler/11.0/042/ipp/ia32/include`

Benchmarks using both Fortran and C:
```
icc ifort
```

Peak Portability Flags

410.bwaves: `-DSPEC_CPU_LP64`
416.gamess: `-DSPEC_CPU_LP64`
433.milc: `-DSPEC_CPU_LP64`
434.zeusmp: `-DSPEC_CPU_LP64`
435.gromacs: `-DSPEC_CPU_LP64 -nofor_main`
436.cactusADM: `-DSPEC_CPU_LP64 -nofor_main`
444.namd: `-DSPEC_CPU_LP64`
447.dealII: `-DSPEC_CPU_LP64`
453.povray: `-DSPEC_CPU_LP64`
454.calculix: `-DSPEC_CPU_LP64 -nofor_main`
459.GemsFDTD: `-DSPEC_CPU_LP64`
465.tonto: `-DSPEC_CPU_LP64`
470.lbm: `-DSPEC_CPU_LP64`
481.wrf: `-DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX`

Peak Optimization Flags

C benchmarks:

Continued on next page

Peak Optimization Flags (Continued)

433.milc: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3 -no-prec-div -static -fno-alias

470.lbm: -xSSE4.1 -ipo -O3 -no-prec-div -static -opt-prefetch -auto-ilp32

482.sphinx3: -xSSE4.1 -ipo -O3 -no-prec-div -static -unroll2

C++ benchmarks:

444.namd: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3 -no-prec-div -static -fno-alias -auto-ilp32

447.dealII: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3 -no-prec-div -static -unroll2 -ansi-alias -scalar-rep-

450.soplex: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3 -no-prec-div -static -opt-malloc-options=3

453.povray: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3 -no-prec-div -static -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: -xSSE4.1 -ipo -O3 -no-prec-div -static -opt-prefetch

416.gamess: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3 -no-prec-div -static -unroll2 -Ob0 -ansi-alias -scalar-rep-

434.zeusmp: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3 -no-prec-div -static

437.leslie3d: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3 -no-prec-div -static -opt-malloc-options=3 -opt-prefetch

459.GemsFDTD: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3 -no-prec-div -static -unroll2 -Ob0 -opt-prefetch

465.tonto: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3 -no-prec-div -static -unroll4 -auto

Benchmarks using both Fortran and C:

435.gromacs: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3 -no-prec-div -static -opt-prefetch -auto-ilp32

436.cactusADM: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3 -no-prec-div -static -unroll2 -opt-prefetch -parallel -auto-ilp32

Continued on next page

Peak Optimization Flags (Continued)

454.calculix: `-xSSE4.1 -ipo -O3 -no-prec-div -static -auto-ilp32`

481.wrf: `basepeak = yes`

The flags files that were used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/Intel-ic11.0-fp-linux64-revA.20090713.13.html`
`http://www.spec.org/cpu2006/flags/Intel-Linux64-Platform.20090713.03.html`

You can also download the XML flags sources by saving the following links:
`http://www.spec.org/cpu2006/flags/Intel-ic11.0-fp-linux64-revA.20090713.13.xml`
`http://www.spec.org/cpu2006/flags/Intel-Linux64-Platform.20090713.03.xml`

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Tue Jul 22 20:12:11 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 11 November 2008.